


075.90.60 (FCA)

RF 1500
linkable G1/8"

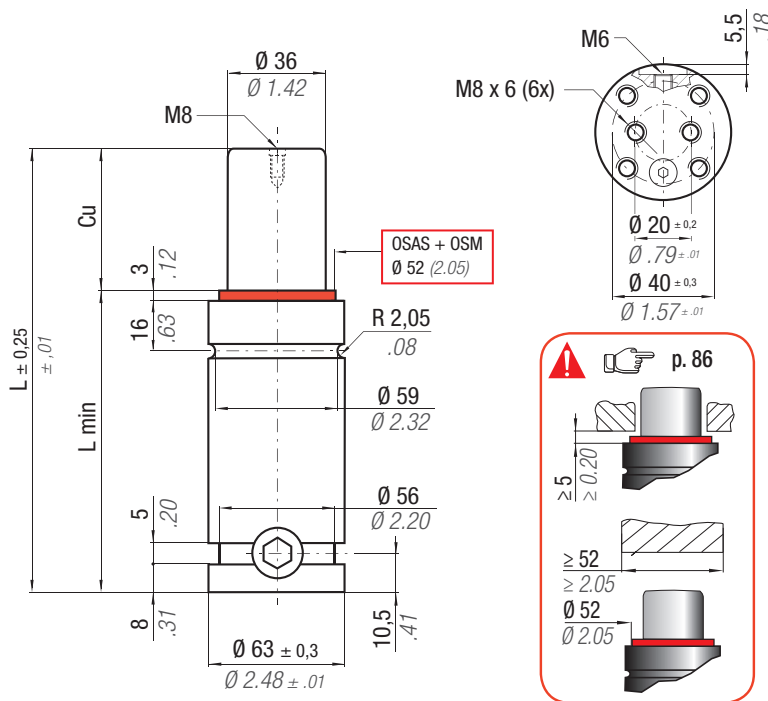

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio
 The new code will be supplied only when the old will be out of stock
 Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé
 El nuevo código será suministrado sólo cuando el viejo está fuera de stock
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS




USAS



OPAS

* F_{1i} = Isothermal end force at 100% Cu
 ** F_{1p} = Polyphonic end force at 100% Cu
 p. 18

N ₂		°F 32 - 176	°C 0 - 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 10,18 cm ² 1.578 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV01500C					
CODE PHASING OUT from 11/2019	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀	PED 2014/68/EU						
RF 1500 - 013 - A	RF 1500 - 013 - B	13 0.51	80 3.15	67 2.64	1530 3440 ± 5% 150 bar 2175 psi + 20 °C +68 °F	2152 4838	2521 5667	53,0 3.23	1,15 2.54	✓					
RF 1500 - 016 - A	RF 1500 - 016 - B	16 0.63	86 3.39	70 2.76							2213 4975	2616 5881	61,0 3.72	1,18 2.60	✓
RF 1500 - 019 - A	RF 1500 - 019 - B	19 0.75	92 3.62	73 2.87							2262 5085	2693 6054	69,0 4.21	1,22 2.69	✓
RF 1500 - 025 - A	RF 1500 - 025 - B	25 0.98	104 4.09	79 3.11							2336 5252	2811 6319	85,0 5.19	1,29 2.84	✓
RF 1500 - 032 - A	RF 1500 - 032 - B	32 1.26	118 4.65	86 3.39							2397 5389	2908 6537	103,0 6.28	1,37 3.02	✓
RF 1500 - 038 - A	RF 1500 - 038 - B	38 1.50	130 5.12	92 3.62							2435 5475	2971 6679	119,0 7.26	1,44 3.17	✓
RF 1500 - 050 - A	RF 1500 - 050 - B	50 1.97	154 6.06	104 4.09							2490 5597	3059 6877	151,0 9.21	1,58 3.48	✓
RF 1500 - 063 - A	RF 1500 - 063 - B	63 2.48	180 7.09	117 4.61							2529 5685	3123 7021	186,0 11.35	1,74 3.84	✓
RF 1500 - 075 - A	RF 1500 - 075 - B	75 2.95	204 8.03	129 5.08							2555 5743	3165 7115	217,0 13.24	1,88 4.14	✓
RF 1500 - 080 - A	RF 1500 - 080 - B	80 3.15	214 8.43	134 5.28							2563 5763	3180 7149	231,0 14.09	1,94 4.28	✓
RF 1500 - 100 - A	RF 1500 - 100 - B	100 3.94	254 10.00	154 6.06							2590 5824	3224 7248	284,0 17.32	2,18 4.81	✓
RF 1500 - 125 - A	RF 1500 - 125 - B	125 4.92	304 11.97	179 7.05							2613 5875	3262 7333	350,0 21.35	2,47 5.45	✓

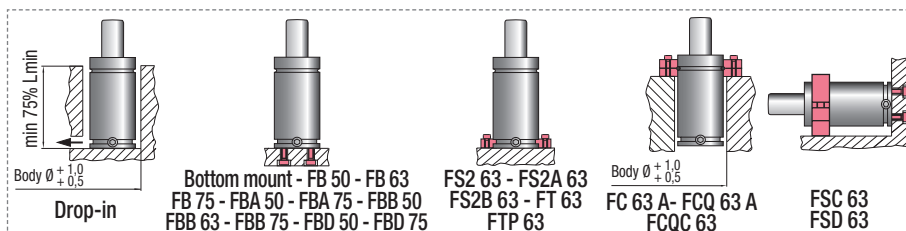

HOW TO ORDER



INSTALLATION GUIDELINE

