

ML SERIES

ML 4700



Ordering-Example:

Special Sizes Available On Request.



SW

ACTIVE SAFETY



OSAS



USAS




OPAS

The new code will be supplied only when the old will be out of stock



* F_{1i} =
Isothermal
end force
at 100% Cu

** F_{1p} =
Polytrophic
end force
at 100% Cu

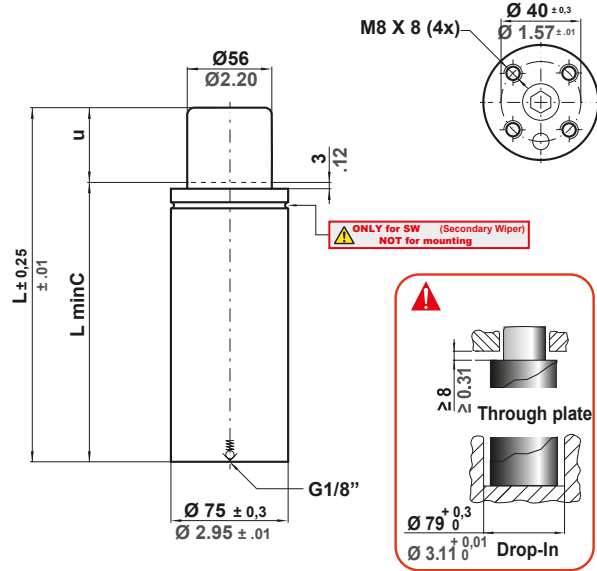

		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 200 bar 2900 psi	P min 20 bar 290 psi	S 24,63 cm ² 3.817 in ²	SPM ~ 30 - 70 (at 20°C)	Max Speed 1,6 m/s 62.9 in/s	Maintenance kit 39BMML04700C
--	--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	--------------------------------------	--	--

CODE PHASING OUT from 05/2019	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³		~Kg	~lb
ML 4700 - 015 - C	ML 4700 - 015 - D	15	0.59	100	3.94	85	3.35	4925	11071	6982	15697	7878	17711	158	9.64	1,72	3.79	✓
ML 4700 - 025 - C	ML 4700 - 025 - D	25	0.98	120	4.72	95	3.74	± 5% 200 bar 2900 psi +20 °C +68°F		7883	17721	9119	20500	204	12.46	1,90	4.19	✓
ML 4700 - 038 - C	ML 4700 - 038 - D	38	1.50	150	5.91	112	4.41			8462	19023	9933	22330	277	16.88	2,17	4.78	✓
ML 4700 - 050 - C	ML 4700 - 050 - D	50	1.97	180	7.09	130	5.12			8683	19520	10247	23035	351	21.39	2,44	5.38	✓
ML 4700 - 063 - C	ML 4700 - 063 - D	63	2.48	210	8.27	147	5.79			8963	20150	10647	23936	423	25.82	2,72	6.00	✓
ML 4700 - 080 - C	ML 4700 - 080 - D	80	3.15	250	9.84	170	6.69			9191	20663	10975	24673	520	31.74	3,08	6.79	✓

KIT FOR LINKING

code: 39FML04700B



Replace every 1 million cycles.

