

RF SERIES

RF 1200
linkable G1/8"



Ordering-Example:

Special Sizes Available On Request.

SW

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY

OSAS


USAS

OPAS

The new code will be supplied only when the old will be out of stock

* F_{1i} =
Isothermal end force at 100% Cu

** F_{1p} =
Polytropic end force at 100% Cu

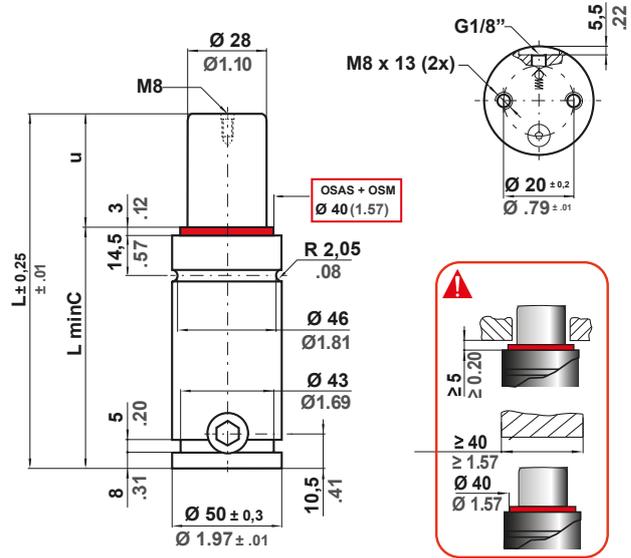

N2	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 170 bar 2465 psi	P min 20 bar 290 psi	S 6,15 cm ² 0.953 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMRV01000C
----	--------------------------	---------------------------	------------------------------	----------------------------	--	--------------------------------	-----------------------------------	---------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓	
RF 1200 - 013 - A	◆ RF 1200 - 013 - B	13	0.51	74	2.91	61	2.40	1047	2354	± 5%	1577	3546	1839	4135	28,4	1.73	0,65	1.43	✓
RF 1200 - 016 - A	RF 1200 - 016 - B	16	0.63	80	3.15	64	2.52				1622	3646	1906	4284	33,1	2.02	0,68	1.50	✓
RF 1200 - 019 - A	RF 1200 - 019 - B	19	0.75	86	3.39	67	2.64				1657	3725	1959	4403	37,7	2.30	0,70	1.54	✓
RF 1200 - 025 - A	RF 1200 - 025 - B	25	0.98	98	3.86	73	2.87				1709	3841	2037	4579	47,1	2.87	0,75	1.65	✓
RF 1200 - 032 - A	RF 1200 - 032 - B	32	1.26	112	4.41	80	3.15				1750	3934	2100	4721	58,0	3.54	0,81	1.79	✓
RF 1200 - 038 - A	RF 1200 - 038 - B	38	1.50	124	4.88	86	3.39				1776	3992	2139	4809	67,4	4.11	0,85	1.87	✓
RF 1200 - 050 - A	RF 1200 - 050 - B	50	1.97	148	5.83	98	3.86				1811	4072	2194	4932	86,1	5.25	0,95	2.09	✓
RF 1200 - 063 - A	RF 1200 - 063 - B	63	2.48	174	6.85	111	4.37				1836	4128	2233	5020	106,3	6.49	1,05	2.31	✓
RF 1200 - 075 - A	RF 1200 - 075 - B	75	2.95	198	7.80	123	4.84				1853	4165	2258	5077	125,0	7.63	1,15	2.54	✓
RF 1200 - 080 - A	RF 1200 - 080 - B	80	3.15	208	8.19	128	5.04				1858	4177	2267	5096	132,8	8.10	1,19	2.62	✓
RF 1200 - 100 - A	RF 1200 - 100 - B	100	3.94	248	9.76	148	5.83	1875	4215	2293	5156	164,0	10.01	1,35	2.98	✓			
RF 1200 - 125 - A	RF 1200 - 125 - B	125	4.92	298	11.73	173	6.81	1889	4247	2315	5205	202,9	12.38	1,55	3.42	✓			

◆ Disposable

