

## RF SERIES

RF 2400  
linkable G1/8"



Ordering-Example:

Special Sizes Available On Request.

075.90.60 (FCA)



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

### ACTIVE SAFETY




The new code will be supplied only when the old will be out of stock

**easu**  
MANIFOLD

\*  $F_{1i}$  =  
Isothermal  
end force  
at 100% Cu

\*\*  $F_{1p}$  =  
Polytrophic  
end force  
at 100% Cu

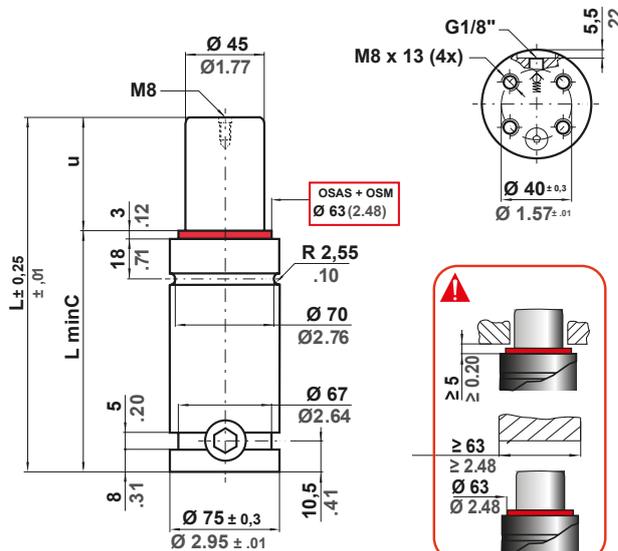

		0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	<b>P max</b> 150 bar 2175 psi	<b>P min</b> 20 bar 290 psi	<b>S</b> 15,90 cm <sup>2</sup> 2,465 in <sup>2</sup>	<b>SPM</b> ~ 20 - 100 (at 20°C)	<b>Max Speed</b> 1,8 m/s 70,8 in/s	<b>Maintenance kit</b> 39BMRV02400D
--	--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>	~Kg	~lb	✓	
RF 2400 - 016 - A	◆ RF 2400 - 016 - B	16	0.63	87	3.43	71	2.80	± 5% 150 bar 2175 psi  + 20 °C +68 °F	3510	7891	4170	9374	92	5.61	1,68	3,70	✓		
RF 2400 - 019 - A	◆ RF 2400 - 019 - B	19	0.75	93	3.66	74	2.91		3592	8075	4299	9665	104	6.35	1,73	3,81	✓		
RF 2400 - 025 - A	RF 2400 - 025 - B	25	0.98	105	4.13	80	3.15		3716	8354	4498	10111	128	7.81	1,82	4,01	✓		
RF 2400 - 032 - A	RF 2400 - 032 - B	32	1.26	119	4.69	87	3.43		3818	8583	4662	10481	156	9.52	1,93	4,25	✓		
RF 2400 - 038 - A	RF 2400 - 038 - B	38	1.50	131	5.16	93	3.66		2385	5362	3883	8728	4767	10717	180	10.98	2,03	4,48	✓
RF 2400 - 050 - A	RF 2400 - 050 - B	50	1.97	155	6.10	105	4.13		3974	8935	4917	11054	228	13.91	2,21	4,87	✓		
RF 2400 - 063 - A	RF 2400 - 063 - B	63	2.48	181	7.13	118	4.65		4041	9083	5026	11299	280	17.09	2,42	5,34	✓		
RF 2400 - 075 - A	RF 2400 - 075 - B	75	2.95	205	8.07	130	5.12		4084	9181	5098	11461	328	20.02	2,61	5,75	✓		
RF 2400 - 080 - A	RF 2400 - 080 - B	80	3.15	215	8.46	135	5.31		4099	9215	5123	11517	348	21.24	2,69	5,93	✓		
RF 2400 - 100 - A	RF 2400 - 100 - B	100	3.94	255	10.04	155	6.10		4145	9318	5199	11688	428	26.12	3,00	6,61	✓		
RF 2400 - 125 - A	RF 2400 - 125 - B	125	4.92	305	12.01	180	7.09	4183	9405	5264	11833	528	32.22	3,40	7,50	✓			

◆ Disposable

