

RF SERIES

RF 750
linkable G1/8"



Ordering-Example:

Special Sizes Available On Request.

075.90.60 (FCA)



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY



OSAS



USAS




OPAS

The new code will be supplied only when the old will be out of stock



* F_{1i} =
Isothermal
end force
at 100% Cu

** F_{1p} =
Polytrophic
end force
at 100% Cu

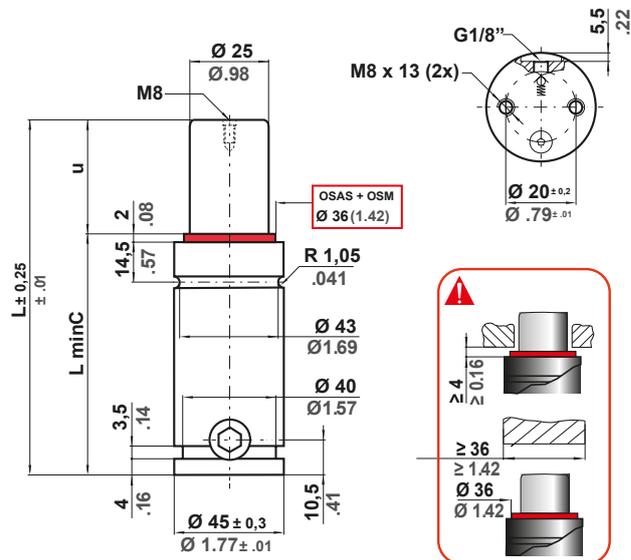

		0 - 80 °C 32 - 176 °F	ΔP ± 0.33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4.91 cm ² 0.761 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV00750C
--	--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓	
RF 750 - 010 - A	◆ RF 750 - 010 - B	10	0.39	62	2.44	52	2.05	740	1664	± 5%	1118	2514	1343	3018	16,6	1.01	0,47	1.04	✓
RF 750 - 013 - A	RF 750 - 013 - B	13	0.51	68	2.68	55	2.17				1152	2590	1396	3139	20,4	1.24	0,48	1.06	✓
RF 750 - 016 - A	RF 750 - 016 - B	16	0.63	74	2.91	58	2.28				1176	2644	1435	3227	24,1	1.47	0,50	1.10	✓
RF 750 - 019 - A	RF 750 - 019 - B	19	0.75	80	3.15	61	2.40				1194	2685	1465	3293	27,9	1.70	0,52	1.15	✓
RF 750 - 025 - A	RF 750 - 025 - B	25	0.98	92	3.62	67	2.64				1220	2743	1507	3388	35,5	2.17	0,56	1.23	✓
RF 750 - 032 - A	RF 750 - 032 - B	32	1.26	106	4.17	74	2.91				1240	2787	1539	3460	44,3	2.70	0,61	1.34	✓
RF 750 - 038 - A	RF 750 - 038 - B	38	1.50	118	4.65	80	3.15				1251	2813	1558	3503	51,9	3.17	0,65	1.43	✓
RF 750 - 050 - A	RF 750 - 050 - B	50	1.97	142	5.59	92	3.62				1267	2848	1584	3562	67,0	4.09	0,72	1.59	✓
RF 750 - 063 - A	RF 750 - 063 - B	63	2.48	168	6.61	105	4.13				1278	2873	1602	3602	83,4	5.09	0,81	1.79	✓
RF 750 - 075 - A	RF 750 - 075 - B	75	2.95	192	7.56	117	4.61				1285	2888	1614	3628	98,5	6.01	0,88	1.94	✓
RF 750 - 080 - A	RF 750 - 080 - B	80	3.15	202	7.95	122	4.80				1287	2893	1618	3637	104,8	6.40	0,92	2.03	✓
RF 750 - 100 - A	RF 750 - 100 - B	100	3.94	242	9.53	142	5.59				1294	2909	1629	3663	130,1	7.94	1,04	2.29	✓
RF 750 - 125 - A	RF 750 - 125 - B	125	4.92	292	11.50	167	6.57				1300	2922	1639	3685	161,6	9.86	1,21	2.67	✓

◆ Disposable

