

## RF SERIES


linkable G1/8"



Ordering-Example:

Special Sizes Available On Request.

FCA

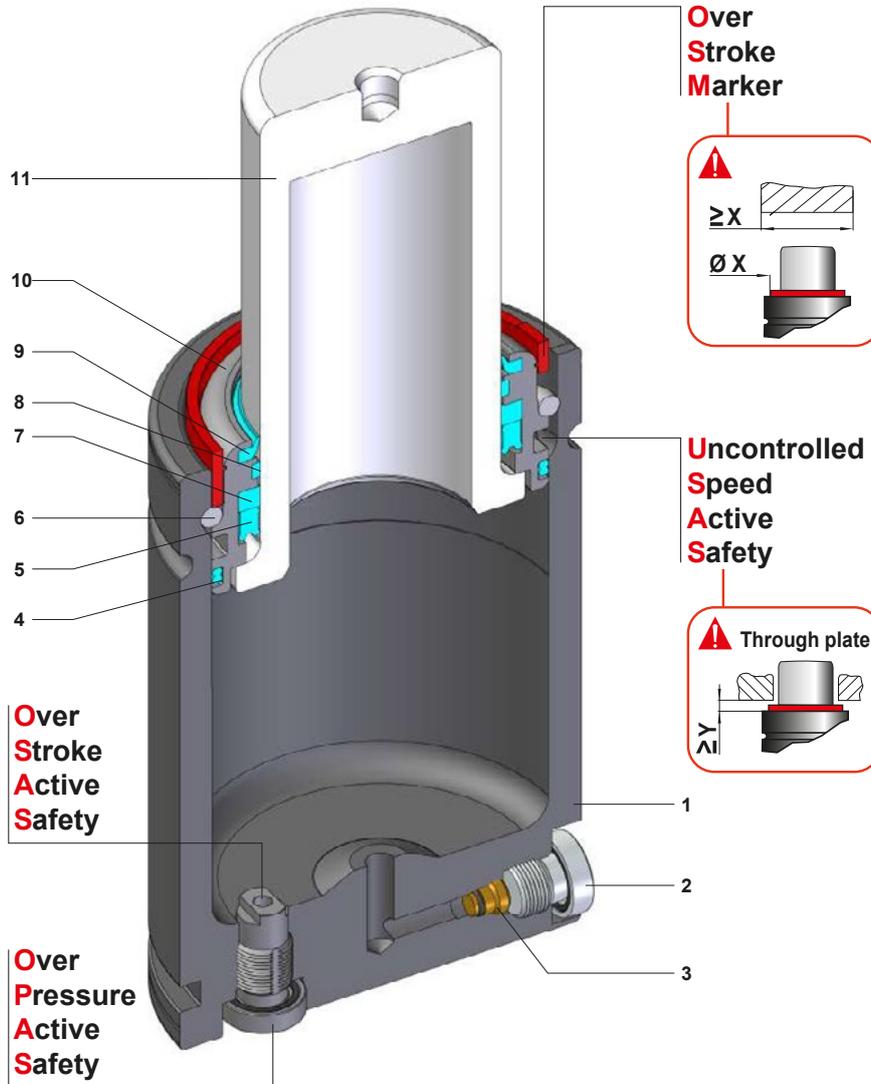

Minimum height, maximum force + SKUDO

SEALING	ROD SEAL
DESIGN	BUSH - BODY DESIGN

1	Body	5	Rod seal	9	Rod wiper
2	Plug	6	Retaining ring	10	Bush
3	Valve	7	Back-up ring	11	Rod (nitrited superfinished)
4	Dual ring seal	8	Guide ring		

## RF SERIES

linkable G1/8"



Ordering-Example:  
RF 2400-050-B-E-W

Special Sizes Available On Request.

### RANGE CHART

Model	Body Ø		Stroke Cu		Initial force F0		OSAS	USAS	OPAS	SKUDO	SW	
	mm	inch	mm	inch	daN	lb						
RF 750	45	1.77	10 - 125	0.39 - 4.92	740	1664	✓	✓	✓	-	✓	
RF 1000	50	1.97	13 - 125	0.51 - 4.92	920	2068	✓	✓	✓	-	✓	
RF 1200	50	1.97	13 - 125	0.51 - 4.92	1047	2354	✓	✓	✓	-	✓	
RF 1500	63	2.48	13 - 125	0.51 - 4.92	1530	3440	✓	✓	✓	-	✓	
RF 2400	75	2.95	16 - 125	0.63 - 4.92	2385	5362	✓	✓	✓	-	✓	
	95	3.74	} <b>RV series</b>									
	120	4.72										
	150	5.91										
	150	5.91										
	195	7.68										

✓ Built-in as standard    ✓ Optional upon request

### HOW TO ORDER



### Available versions

<b>RF 2400-050-B</b> Standard code	<b>RF 2400-050-B-W</b> Add "-W" to standard code	<b>RF 2400-050-B-N</b> Add "-N" to standard code	<b>RF 2400-050-B-N-W</b> Add "-N-W" to standard code	<b>RF 2400-050-B-E</b> Add "-E" to standard code	<b>RF 2400-050-B-E-W</b> Add "-E-W" to standard code
Self contained	Self contained	Linkable	Linkable	Easy Manifold	Easy Manifold
	++ Secondary wiper		Secondary wiper		Secondary wiper