

## RG SERIES

### RG 4200



Ordering-Example:

Special Sizes Available On Request.

K32D2-2400-50 (Nissan)	EM24.54.700 (Renault)
------------------------	-----------------------

**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER


**ACTIVE SAFETY**

The new code will be supplied only when the old will be out of stock

**easu**  
MANIFOLD

\*  $F_{i1}$  =  
Isothermal  
end force  
at 100% Cu

\*\*  $F_{ip}$  =  
Polytropic  
end force  
at 100% Cu

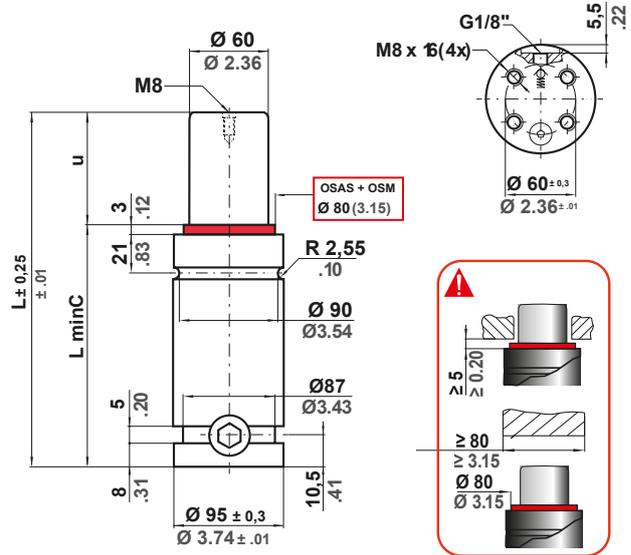

N2	0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	<b>P max</b> 150 bar 2175 psi	<b>P min</b> 20 bar 290 psi	<b>S</b> 28,27 cm <sup>2</sup> 4.382 in <sup>2</sup>	<b>SPM</b> ~ 20 - 100 (at 20°C)	<b>Max Speed</b> 1,8 m/s 70.8 in/s	<b>Maintenance kit</b> 39BMRV04200C
----	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		~Kg	~lb	PED 2014/68/EU	
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>				
RG 4200 - 016 - A	◆RG 4200 - 016 - B	16	0.63	94	3.70	78	3.07	± 5% 150 bar 2175 psi + 20 °C +68 °F	6103	13720	7197	16179	172	10.48	2,98	6.57	✓		
RG 4200 - 019 - A	◆RG 4200 - 019 - B	19	0.75	100	3.94	81	3.19		6269	14093	7458	16767	192	11.71	3,05	6.72	✓		
RG 4200 - 025 - A	RG 4200 - 025 - B	25	0.98	112	4.41	87	3.43		6531	14682	7874	17702	232	14.18	3,20	7.05	✓		
RG 4200 - 032 - A	RG 4200 - 032 - B	32	1.26	126	4.96	94	3.70		6755	15186	8236	18515	280	17.06	3,38	7.45	✓		
RG 4200 - 038 - A	RG 4200 - 038 - B	38	1.50	138	5.43	100	3.94		4240	9532	6902	15517	8475	19052	320	19.52	3,52	7.76	✓
RG 4200 - 050 - A	RG 4200 - 050 - B	50	1.97	162	6.38	112	4.41		7117	16001	8827	19844	401	24.45	3,82	8.42	✓		
RG 4200 - 063 - A	RG 4200 - 063 - B	63	2.48	188	7.40	125	4.92		7278	16361	9092	20440	488	29.80	4,15	9.15	✓		
RG 4200 - 075 - A	RG 4200 - 075 - B	75	2.95	212	8.35	137	5.39		7386	16604	9272	20843	569	34.73	4,45	9.81	✓		
RG 4200 - 080 - A	RG 4200 - 080 - B	80	3.15	222	8.74	142	5.59		7423	16687	9333	20982	603	36.79	4,57	10.08	✓		
RG 4200 - 100 - A	RG 4200 - 100 - B	100	3.94	269	10.31	162	6.38		7539	16949	9529	21421	738	45.01	5,07	11.18	✓		
RG 4200 - 125 - A	RG 4200 - 125 - B	125	4.92	315	12.28	187	7.36		7639	17173	9696	21798	906	55.29	5,69	12.54	✓		

◆ Disposable

