


Ordering-Example:

Special Sizes Available On Request.

Nissan	Renault
--------	---------

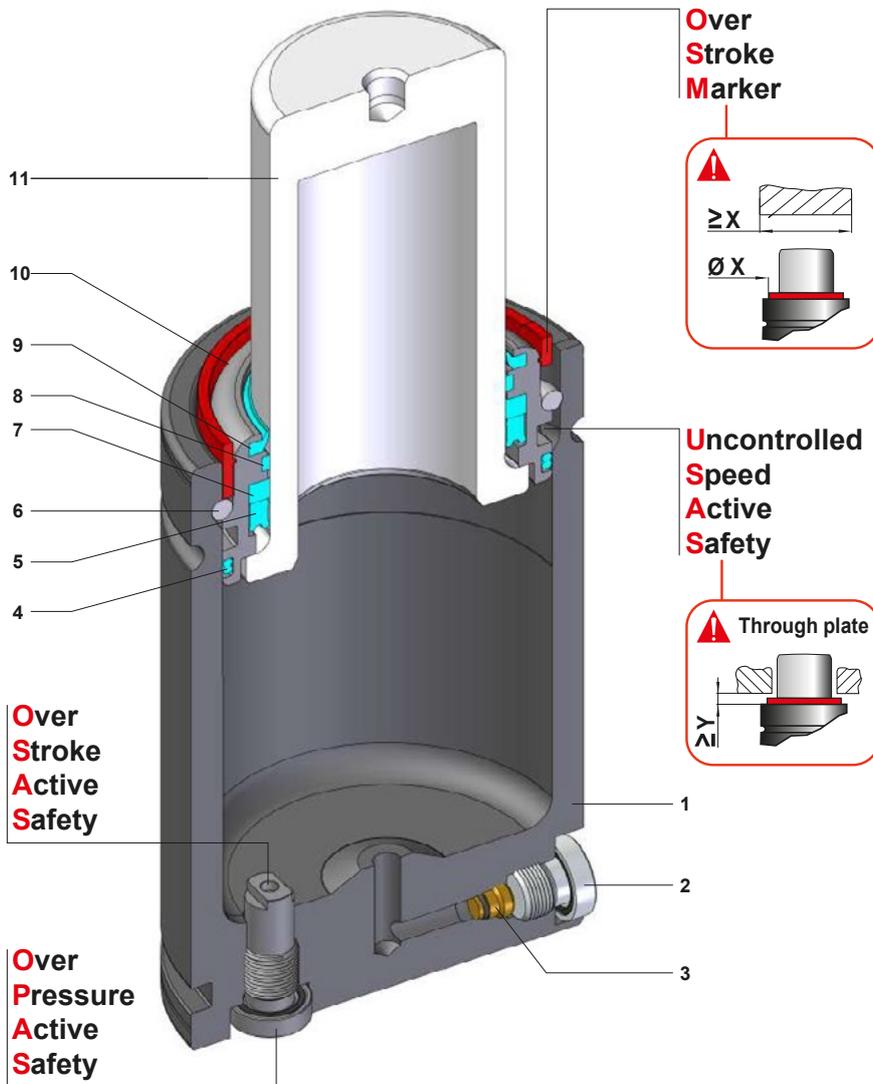

Minimum height, maximum force, hose cylinders with G1/8 charging port

SEALING	ROD SEAL
DESIGN	BUSH - BODY DESIGN

1	Body	5	Rod seal	9	Rod wiper
2	Plug	6	Retaining ring	10	Bush
3	Valve	7	Back-up ring	11	Rod (nitrited superfinished)
4	Dual ring seal	8	Guide ring		

RG SERIES

linkable G1/8"



Ordering-Example:
RG 2400-050-B-E-W

Special Sizes Available On Request.

RANGE CHART

Model	Body Ø		Stroke Cu		Initial force F0		OSAS	USAS	OPAS	SKUDO	SW
	mm	inch	mm	inch	daN	lb					
RG 750	45	1.77	10 - 125	0.39 - 4.92	740	1664	✓	✓	✓	-	✓
RG 1000	50	1.97	10 - 125	0.39 - 4.92	920	2068	✓	✓	✓	-	✓
RG 1500	63	2.48	10 - 125	0.39 - 4.92	1530	3440	✓	✓	✓	-	✓
RG 2400	75	2.95	10 - 125	0.39 - 4.92	2385	5362	✓	✓	✓	-	✓
RG 4200	95	3.74	16 - 125	0.63 - 4.92	4240	9532	✓	✓	✓	-	✓
RG 6600	120	4.72	16 - 125	0.63 - 4.92	6630	14905	✓	✓	✓	-	✓

✓ Built-in as standard ✓ Optional upon request

HOW TO ORDER



Available versions

RG 2400-050-B Standard code	RG 2400-050-B-W Add "-W" to standard code	RG 2400-050-B-N Add "-N" to standard code	RG 2400-050-B-N-W Add "-N-W" to standard code	RG 2400-050-B-E Add "-E" to standard code	RG 2400-050-B-E-W Add "-E-W" to standard code
Self contained	Self contained	Linkable	Linkable	Easy Manifold	Easy Manifold
	+ Secondary wiper		+ Secondary wiper		+ Secondary wiper