

RS SERIES

■ RS 1200



Ordering-Example:

Special Sizes Available On Request.

SW

OSAS + OSM

OVER STROKE
= ACTIVE +
SAFETY

OVER
STROKE
MARKER

ACTIVE SAFETY

OSAS

USAS

OPAS


SKUDO

The new code will be supplied only when the old will be out of stock

easyl
MANIFOLD

* F_{i1} = Isothermal end force at 100% Cu

** F_{p1} = Polytrophic end force at 100% Cu

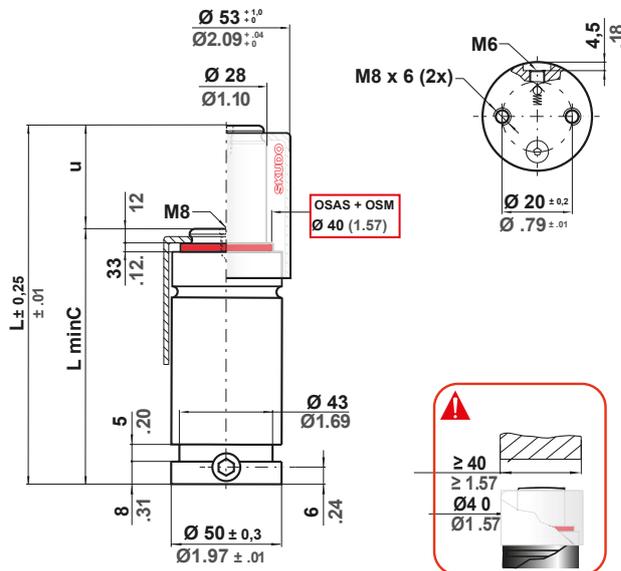

N2	0 - 80 °C 32 - 176 °F	ΔP ± 0.33 %/°C	P max 170 bar 2465 psi	P min 20 bar 290 psi	S 6,15 cm ² 0.953 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV01000C
----	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		~Kg	~lb	PED 2014/68/EU	
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³				
RS 1200 - 010 - A	◆ RS 1200 - 010 - B	10	0.39	64	2.52	54	2.13	1047	2354	± 5%	1418	3187	1605	3608	28,4	1.73	0,51	1.12	✓
RS 1200 - 013 - A	◆ RS 1200 - 013 - B	13	0.51	70	2.76	57	2.24				1476	3318	1690	3799	33,0	2.01	0,54	1.19	✓
RS 1200 - 016 - A	RS 1200 - 016 - B	16	0.63	76	2.99	60	2.36				1523	3424	1759	3954	37,7	2.30	0,56	1.23	✓
RS 1200 - 022 - A	RS 1200 - 022 - B	22	0.87	88	3.46	66	2.60				1594	3583	1864	4190	47,0	2.87	0,61	1.34	✓
RS 1200 - 029 - A	RS 1200 - 029 - B	29	1.14	102	4.02	73	2.87				1652	3713	1950	4385	58,0	3.54	0,67	1.48	✓
RS 1200 - 035 - A	RS 1200 - 035 - B	35	1.38	114	4.49	79	3.11				1688	3795	2006	4509	67,3	4.11	0,71	1.57	✓
RS 1200 - 047 - A	RS 1200 - 047 - B	47	1.85	138	5.43	91	3.58				1740	3911	2084	4685	86,0	5.25	0,81	1.79	✓
RS 1200 - 060 - A	RS 1200 - 060 - B	60	2.36	164	6.46	104	4.09				1776	3994	2141	4812	106,3	6.49	0,91	2.01	✓
RS 1200 - 072 - A	RS 1200 - 072 - B	72	2.83	188	7.40	116	4.57				1801	4048	2178	4896	125,0	7.63	1,05	2.31	✓
RS 1200 - 077 - A	RS 1200 - 077 - B	77	3.03	198	7.80	121	4.76				1809	4067	2191	4925	132,8	8.10	1,09	2.40	✓
RS 1200 - 097 - A	RS 1200 - 097 - B	97	3.82	238	9.37	141	5.55	1834	4124	2230	5014	163,9	10.00	1,21	2.67	✓			
RS 1200 - 122 - A	RS 1200 - 122 - B	122	4.80	288	11.34	166	6.54	1856	4172	2263	5088	202,9	12.38	1,41	3.11	✓			

◆ Disposable

