

RS SERIES

RS 750



Ordering-Example:

Special Sizes Available On Request.

SW

OSAS + OSM

=

OVER STROKE
ACTIVE
SAFETY

+

=

OVER STROKE
MARKER

OSAS

The new code will be supplied only when the old will be out of stock

USAS


easy
MANIFOLD

OPAS

* F_{1i} =
Isothermal
end force
at 100% Cu

** F_{1p} =
Polytrophic
end force
at 100% Cu


SKUDO

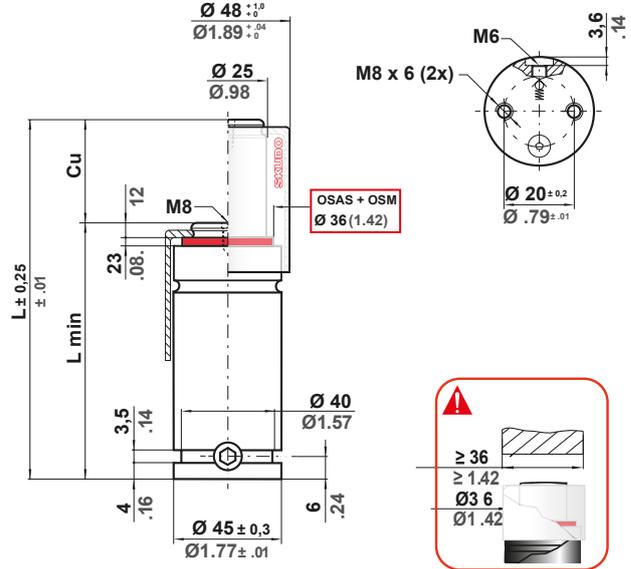

	N2	 0 - 80 °C 32 - 176 °F	ΔP ± 0.33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4.91 cm ² 0.761 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV00750C
--	----	------------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU				
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓		
RS 750 - 007 - A	◆RS 750 - 007 - B	7	0.28	52	2.05	45	1.77	150 bar 2175psi	740	1664	± 5%	972	2185	1114	2504	16,5	1.01	0,36	0.79	✓
RS 750 - 010 - A	◆RS 750 - 010 - B	10	0.39	58	2.28	48	1.89					1024	2301	1193	2683	20,3	1.24	0,38	0.84	✓
RS 750 - 013 - A	RS 750 - 013 - B	13	0.51	64	2.52	51	2.01					1062	2388	1253	2818	24,1	1.47	0,39	0.86	✓
RS 750 - 016 - A	RS 750 - 016 - B	16	0.63	70	2.76	54	2.13					1092	2454	1300	2923	27,9	1.70	0,41	0.90	✓
RS 500 - 022 - A	RS 750 - 022 - B	22	0.87	82	3.23	60	2.36					1135	2551	1369	3077	35,4	2.16	0,45	0.99	✓
RS 750 - 029 - A	RS 750 - 029 - B	29	1.14	96	3.78	67	2.64					1168	2627	1423	3198	44,3	2.70	0,50	1.10	✓
RS 750 - 035 - A	RS 750 - 035 - B	35	1.38	108	4.25	73	2.87					1189	2673	1456	3273	51,8	3.16	0,54	1.19	✓
RS 750 - 047 - A	RS 750 - 047 - B	47	1.85	132	5.20	85	3.35					1217	2736	1502	3377	67,0	4.09	0,61	1.34	✓
RS 750 - 060 - A	RS 750 - 060 - B	60	2.36	158	6.22	98	3.86					1237	2781	1535	3450	83,4	5.09	0,70	1.54	✓
RS 750 - 072 - A	RS 750 - 072 - B	72	2.83	182	7.17	110	4.33					1250	2809	1556	3497	98,5	6.01	0,77	1.70	✓
RS 750 - 077 - A	RS 750 - 077 - B	77	3.03	192	7.56	115	4.53					1254	2819	1563	3513	104,8	6.40	0,81	1.79	✓
RS 750 - 097 - A	RS 750 - 097 - B	97	3.82	232	9.13	135	5.31					1267	2848	1584	3561	130,0	7.93	0,93	2.05	✓
RS 750 - 122 - A	RS 750 - 122 - B	122	4.80	282	11.10	160	6.30					1278	2872	1602	3602	161,5	9.86	1,10	2.43	✓

◆ Disposable

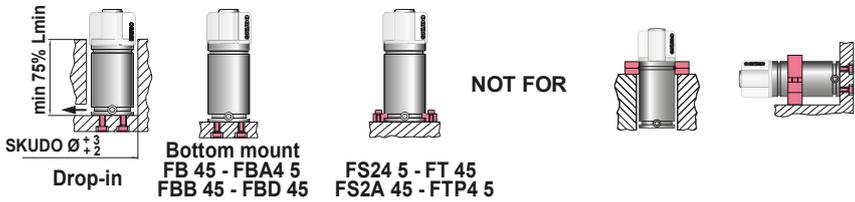

WARNING
REMOVE SKUDO

Upside down mounting