


Ordering-Example:

Special Sizes Available On Request.

|         |        |     |
|---------|--------|-----|
| Mazda   | Nissan | PSA |
| Renault | Toyota |     |

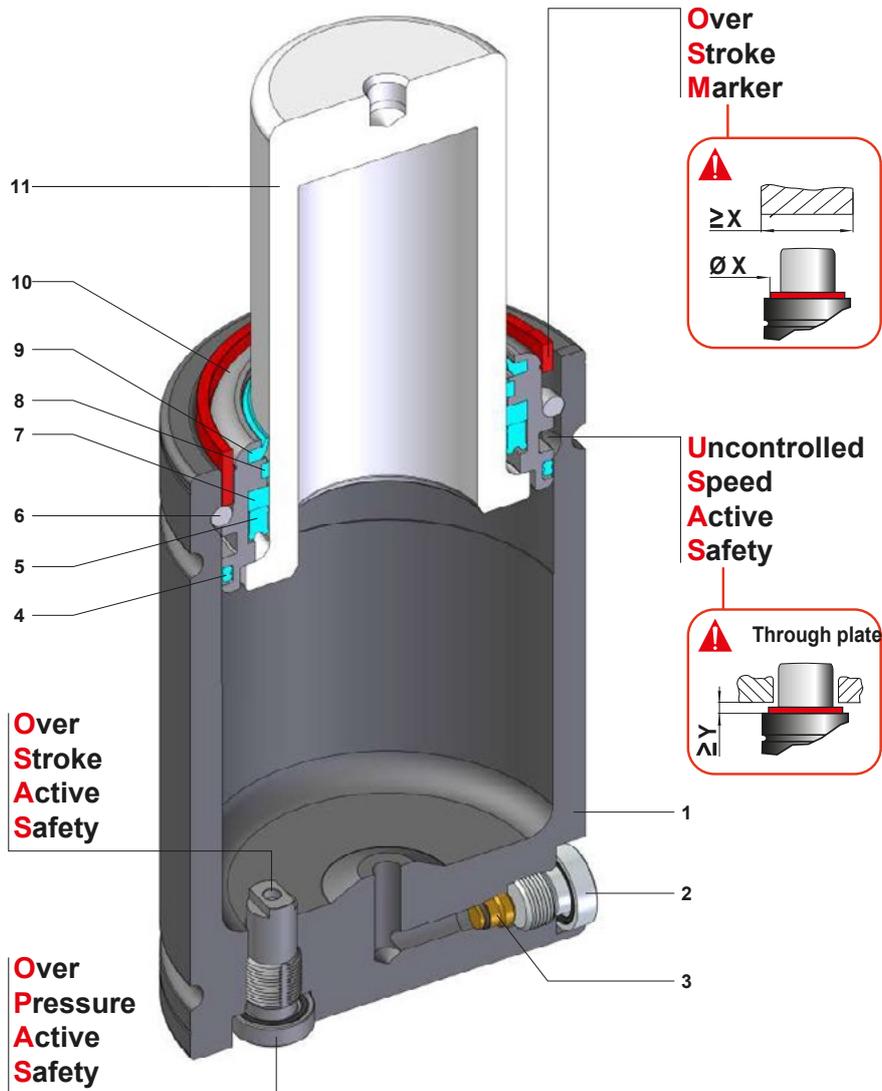

Minimum height, maximum force, hose cylinders with G1/8 charging port

|         |                    |
|---------|--------------------|
| SEALING | ROD SEAL           |
| DESIGN  | BUSH - BODY DESIGN |

|   |                |   |                |    |                              |
|---|----------------|---|----------------|----|------------------------------|
| 1 | Body           | 5 | Rod seal       | 9  | Rod wiper                    |
| 2 | Plug           | 6 | Retaining ring | 10 | Bush                         |
| 3 | Valve          | 7 | Back-up ring   | 11 | Rod (nitrited superfinished) |
| 4 | Dual ring seal | 8 | Guide ring     |    |                              |

Ordering-Example:  
RT 2400-050-B-E-W

Special Sizes Available On Request.

### RANGE CHART

| Model   | Body Ø |      | Stroke Cu |             | Initial force F0 |       |      |      |      |       |    |
|---------|--------|------|-----------|-------------|------------------|-------|------|------|------|-------|----|
|         | mm     | inch | mm        | inch        | daN              | lb    | OSAS | USAS | OPAS | SKUDO | SW |
| RT 350  | 32     | 1.26 | 10 - 125  | 0.39 - 4.92 | 360              | 809   | ✓    | ✓    | ✓    | -     | ✓  |
| RT 500  | 38     | 1.50 | 10 - 125  | 0.39 - 4.92 | 470              | 1057  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 750  | 45     | 1.77 | 10 - 125  | 0.39 - 4.92 | 740              | 1664  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 1000 | 50     | 1.97 | 10 - 125  | 0.39 - 4.92 | 920              | 2068  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 1200 | 50     | 1.97 | 10 - 125  | 0.39 - 4.92 | 1047             | 2354  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 1500 | 63     | 2.48 | 10 - 125  | 0.39 - 4.92 | 1530             | 3440  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 2400 | 75     | 2.95 | 10 - 125  | 0.39 - 4.92 | 2385             | 5362  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 4200 | 95     | 3.74 | 16 - 125  | 0.63 - 4.92 | 4240             | 9532  | ✓    | ✓    | ✓    | -     | ✓  |
| RT 6600 | 120    | 4.72 | 16 - 125  | 0.63 - 4.92 | 6630             | 14905 | ✓    | ✓    | ✓    | -     | ✓  |
| RT 9500 | 150    | 5.91 | 19 - 125  | 0.75 - 4.92 | 9540             | 21447 | ✓    | ✓    | ✓    | -     | ✓  |

✓ Built-in as standard    ✓ Optional upon request

### HOW TO ORDER



### Available versions

|                                       |   |   |   |   |   |
|---------------------------------------|---|---|---|---|---|
|                                       |   |   |   |   |   |
| <b>RT 2400-050-B</b><br>Standard code | <b>RT 2400-050-B-W</b><br>Add "-W" to standard code | <b>RT 2400-050-B-N</b><br>Add "-N" to standard code | <b>RT 2400-050-B-N-W</b><br>Add "-N-W" to standard code | <b>RT 2400-050-B-E</b><br>Add "-E" to standard code | <b>RT 2400-050-B-E-W</b><br>Add "-E-W" to standard code |
| Self contained                        | Self contained                                      | Linkable  | Linkable  | Easy Manifold                                       | Easy Manifold   |
|                                       | +<br>Secondary wiper                                |   | +<br>Secondary wiper                                    |   | +<br>Secondary wiper                                    |