

RV SERIES

RV 1500



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	W-DX35-6204 (Ford)
B8 3180 220 000 004(MB)	39D 997 (VW)		

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER


ACTIVE SAFETY

The new code will be supplied only when the old will be out of stock

easU MANIFOLD

* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polytrophic end force at 100% Cu

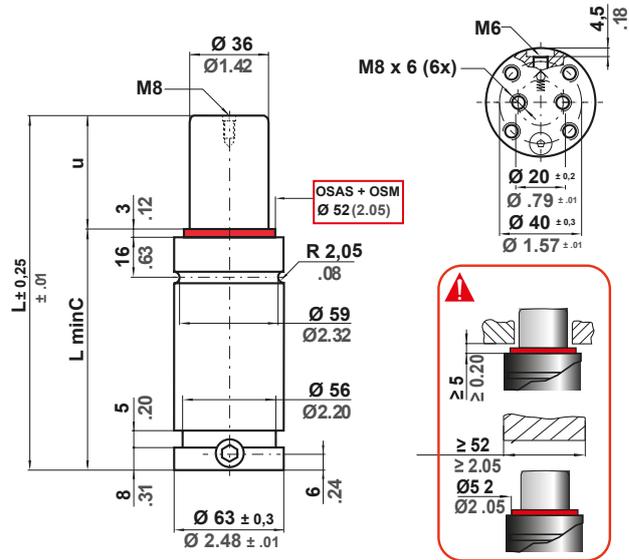

	0 - 80 °C 32 - 176 °F	ΔP ± 0.33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 10,18 cm ² 1.578 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV01500C
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓	
RV 1500 - 010 - B	◆RV 1500 - 010 - C	10	0.39	64	2.52	54	2.13	± 5% 150 bar 2175psi + 20 °C +68 °F	2089	4697	2424	5448	44	2.69	0,88	1.94	✓		
RV 1500 - 013 - B	◆RV 1500 - 013 - C	13	0.51	70	2.76	57	2.24		2168	4874	2546	5723	52	3.17	0,91	2.01	✓		
RV 1500 - 016 - B	RV 1500 - 016 - C	16	0.63	76	2.99	60	2.36		2230	5012	2642	5939	60	3.66	0,96	2.12	✓		
RV 1500 - 019 - B	RV 1500 - 019 - C	19	0.75	82	3.23	63	2.48		2279	5123	2720	6114	68	4.15	0,99	2.18	✓		
RV 1500 - 025 - B	RV 1500 - 025 - C	25	0.98	94	3.70	69	2.72		1530	3440	2353	5290	2838	6380	84	5.13	1,06	2.34	✓
RV 1500 - 032 - B	RV 1500 - 032 - C	32	1.26	108	4.25	76	2.99		2414	5426	2935	6599	102	6.22	1,14	2.51	✓		
RV 1500 - 038 - B	RV 1500 - 038 - C	38	1.50	120	4.72	82	3.23		2452	5512	2997	6738	118	7.20	1,21	2.67	✓		
RV 1500 - 050 - B	RV 1500 - 050 - C	50	1.97	144	5.67	94	3.70		2506	5633	3085	6935	149	9.09	1,36	3.00	✓		
RV 1500 - 063 - B	RV 1500 - 063 - C	63	2.48	170	6.69	107	4.21		2544	5720	3148	7078	184	11.23	1,52	3.35	✓		
RV 1500 - 075 - B	RV 1500 - 075 - C	75	2.95	194	7.64	119	4.69		2570	5777	3190	7172	215	13.12	1,66	3.66	✓		
RV 1500 - 080 - B	RV 1500 - 080 - C	80	3.15	204	8.03	124	4.88		2578	5797	3204	7204	229	13.97	1,72	3.79	✓		
RV 1500 - 100 - B	RV 1500 - 100 - C	100	3.94	244	9.61	144	5.67		2605	5857	3249	7303	281	17.15	1,95	4.30	✓		
RV 1500 - 125 - B	RV 1500 - 125 - C	125	4.92	294	11.57	169	6.65		2628	5907	3286	7387	347	21.18	2,24	4.94	✓		

◆ Disposable

