

RV SERIES

RV 2400



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	W-DX35-6204 (Ford)
B8 3180 220 000 004(MB)	E24.54.815.G (PSA)	39D 997 (VW)	



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY




The new code will be supplied only when the old will be out of stock



* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polytrophic end force at 100% Cu

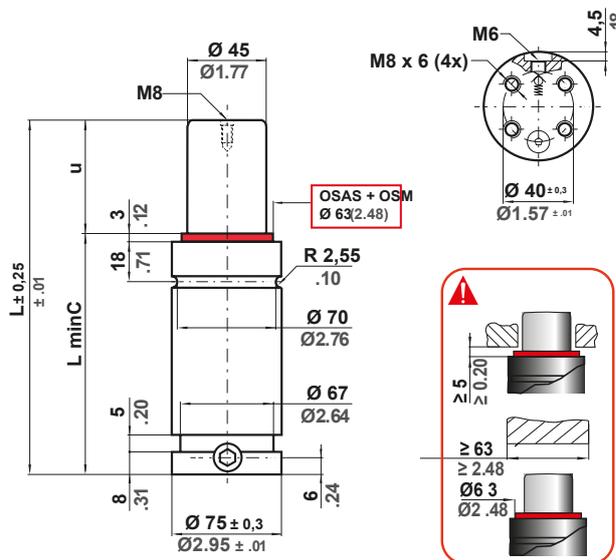

N2	0 - 80 °C 32 - 176 °F	ΔP ± 0.33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 15.90 cm ² 2.465 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV02400D
----	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		~Kg	~lb	PED 2014/68/EU	
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³				
RV 2400 - 010 - A	◆RV 2400 - 010 - B	10	0.39	65	2.56	55	2.17	± 5% 150 bar 2175psi + 20 °C +68 °F	3279	7372	3810	8564	68	4.15	1.25	2.76	✓		
RV 2400 - 013 - A	◆RV 2400 - 013 - B	13	0.51	71	2.80	58	2.28		3409	7663	4010	9015	80	4.88	1.30	2.87	✓		
RV 2400 - 016 - A	◆RV 2400 - 016 - B	16	0.63	77	3.03	61	2.40		3510	7891	4170	9374	92	5.61	1.35	2.98	✓		
RV 2400 - 019 - A	◆RV 2400 - 019 - B	19	0.75	83	3.27	64	2.52		3592	8075	4299	9665	104	6.35	1.40	3.09	✓		
RV 2400 - 025 - A	RV 2400 - 025 - B	25	0.98	95	3.74	70	2.76		2385	5362	3716	8354	4498	10111	128	7.81	1.50	3.31	✓
RV 2400 - 032 - A	RV 2400 - 032 - B	32	1.26	109	4.29	77	3.03		3818	8583	4662	10481	156	9.52	1.61	3.55	✓		
RV 2400 - 038 - A	RV 2400 - 038 - B	38	1.50	121	4.76	83	3.27		3883	8728	4767	10717	180	10.98	1.70	3.75	✓		
RV 2400 - 050 - A	RV 2400 - 050 - B	50	1.97	145	5.71	95	3.74		3974	8935	4917	11054	228	13.91	1.89	4.17	✓		
RV 2400 - 063 - A	RV 2400 - 063 - B	63	2.48	171	6.73	108	4.25		4041	9083	5026	11299	280	17.09	2.10	4.63	✓		
RV 2400 - 075 - A	RV 2400 - 075 - B	75	2.95	195	7.68	120	4.72		4084	9181	5098	11461	328	20.02	2.29	5.05	✓		
RV 2400 - 080 - A	RV 2400 - 080 - B	80	3.15	205	8.07	125	4.92	4099	9215	5123	11517	348	21.24	2.37	5.22	✓			
RV 2400 - 100 - A	RV 2400 - 100 - B	100	3.94	245	9.65	145	5.71	4145	9318	5199	11688	428	26.12	2.68	5.91	✓			
RV 2400 - 125 - A	RV 2400 - 125 - B	125	4.92	295	11.61	170	6.69	4183	9405	5264	11833	528	32.22	3.07	6.77	✓			

◆ Disposable

