

RV SERIES

RV 350



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	075.90.60 (FCA)
W-DX35-6204 (Ford)	B8 3180 220 000 004(MB)		



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY




The new code will be supplied only when the old will be out of stock



* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polytrophic end force at 100% Cu

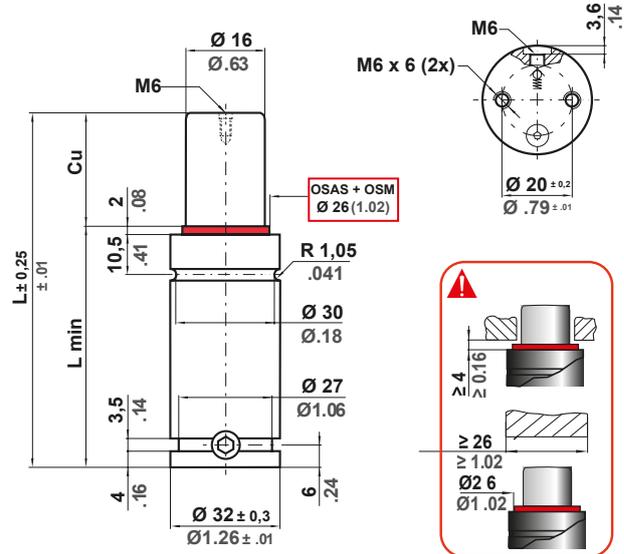

N2	0 - 80 °C 32 - 176 °F	ΔP ± 0.33 %/°C	P max 180 bar 2610 psi	P min 20 bar 290 psi	S 2.01 cm ² 0.312 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV00350C
----	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓	
RV 350 - 010 - A	◆ RV 350 - 010 - B	10	0.39	50	1.97	40	1.57	± 5% 180 bar 2610psi + 20 °C +68 °F	360	809	531	1194	607	1366	7.7	0.47	0.17	0.36	✓
RV 350 - 013 - A	RV 350 - 013 - B	13	0.51	56	2.20	43	1.69				544	1224	627	1409	9.5	0.58	0.18	0.39	✓
RV 350 - 016 - A	RV 350 - 016 - B	16	0.63	62	2.44	46	1.81				554	1245	641	1440	11.2	0.68	0.19	0.41	✓
RV 350 - 019 - A	RV 350 - 019 - B	19	0.75	68	2.68	49	1.93				561	1261	651	1463	13.0	0.79	0.19	0.43	✓
RV 350 - 025 - A	RV 350 - 025 - B	25	0.98	80	3.15	55	2.17				571	1283	665	1496	16.6	1.01	0.21	0.47	✓
RV 350 - 032 - A	RV 350 - 032 - B	32	1.26	94	3.70	62	2.44				578	1300	676	1520	20.7	1.26	0.24	0.52	✓
RV 350 - 038 - A	RV 350 - 038 - B	38	1.50	106	4.17	68	2.68				583	1310	683	1535	24.3	1.48	0.26	0.56	✓
RV 350 - 050 - A	RV 350 - 050 - B	50	1.97	130	5.12	80	3.15				589	1323	691	1554	31.4	1.92	0.30	0.65	✓
RV 350 - 063 - A	RV 350 - 063 - B	63	2.48	156	6.14	93	3.66				593	1333	697	1568	39.1	2.39	0.34	0.74	✓
RV 350 - 075 - A	RV 350 - 075 - B	75	2.95	180	7.09	105	4.13				595	1338	701	1576	46.3	2.83	0.38	0.83	✓
RV 350 - 080 - A	RV 350 - 080 - B	80	3.15	190	7.48	110	4.33	596	1340	702	1579	49.2	3.00	0.39	0.86	✓			
RV 350 - 100 - A	RV 350 - 100 - B	100	3.94	230	9.06	130	5.12	599	1346	706	1588	61.1	3.73	0.46	1.01	✓			
RV 350 - 125 - A	RV 350 - 125 - B	125	4.92	280	11.02	155	6.10	606	1363	717	1613	74.9	4.57	0.54	1.18	✓			

◆ Disposable

