

## RV SERIES

### RV 4200



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	075.90.60 (FCA)
W-DX35-6204 (Ford)	PG 24D (Mazda)	B8 3180 220 000 004(MB)	E24.54.815.G (PSA)
39D 997 (VW)			

**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



**ACTIVE SAFETY**




The new code will be supplied only when the old will be out of stock

**easu**  
MANIFOLD

\*  $F_{1i}$  =  
Isothermal  
end force  
at 100% Cu

\*\*  $F_{1p}$  =  
Polytropic  
end force  
at 100% Cu

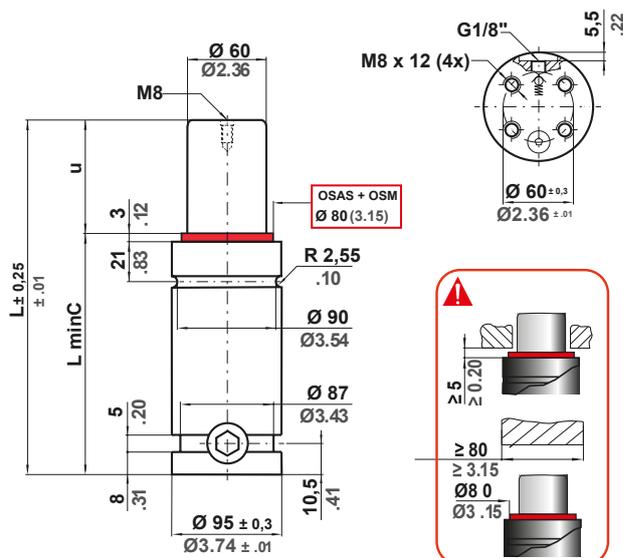

N2	0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0.33 %/°C	$P_{max}$ 150 bar 2175 psi	$P_{min}$ 20 bar 290 psi	$S$ 28.27 cm <sup>2</sup> 4.382 in <sup>2</sup>	$SPM$ ~ 20 - 100 (at 20°C)	<b>Max Speed</b> 1.8 m/s 70.8 in/s	<b>Maintenance kit</b> 39BMRV04200C
----	--------------------------	---------------------------	----------------------------------	--------------------------------	---	----------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>	~Kg	~lb	✓	
RV 4200 - 016 - A	◆RV 4200 - 016 - B	16	0.63	90	3.54	74	2.91	± 5% 150 bar 2175psi  + 20 °C +68 °F	6103	13720	7197	16179	172	10.50	2,76	6.08	✓		
RV 4200 - 019 - A	◆RV 4200 - 019 - B	19	0.75	96	3.78	77	3.03		6269	14093	7458	16767	192	11.72	1,30	6.26	✓		
RV 4200 - 025 - A	RV 4200 - 025 - B	25	0.98	108	4.25	83	3.27		6531	14682	7874	17702	232	14.16	2,99	6.59	✓		
RV 4200 - 032 - A	RV 4200 - 032 - B	32	1.26	122	4.80	90	3.54		6755	15186	8236	18515	279	17.03	3,16	6.97	✓		
RV 4200 - 038 - A	RV 4200 - 038 - B	38	1.50	134	5.28	96	3.78		4240	9532	6902	15517	8475	19052	320	19.53	3,31	7.30	✓
RV 4200 - 050 - A	RV 4200 - 050 - B	50	1.97	158	6.22	108	4.25		7117	16001	8827	19844	401	24.47	3,61	7.96	✓		
RV 4200 - 063 - A	RV 4200 - 063 - B	63	2.48	184	7.24	121	4.76		7278	16361	9092	20440	488	29.78	3,94	8.69	✓		
RV 4200 - 075 - A	RV 4200 - 075 - B	75	2.95	208	8.19	133	5.24		7386	16604	9272	20843	569	34.72	4,24	9.35	✓		
RV 4200 - 080 - A	RV 4200 - 080 - B	80	3.15	218	8.58	138	5.43		7423	16687	9333	20982	603	36.80	4,36	9.61	✓		
RV 4200 - 100 - A	RV 4200 - 100 - B	100	3.94	258	10.16	158	6.22		7539	16949	9529	21421	738	45.04	4,86	10.71	✓		
RV 4200 - 125 - A	RV 4200 - 125 - B	125	4.92	308	12.13	183	7.20	7639	17173	9696	21798	906	55.29	5,48	12.08	✓			

◆ Disposable

