

RV SERIES

RV 500



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	075.90.60 (FCA)
W-DX35-6204 (Ford)	B8 3180 220 000 004(MB)	K 32 H (Nissan)	E24.54.815.G (PSA)
EM24.54.700 (Renault)	39D 997 (VW)		

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



ACTIVE SAFETY

The new code will be supplied only when the old will be out of stock

easu MANIFOLD

* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polytrophic end force at 100% Cu

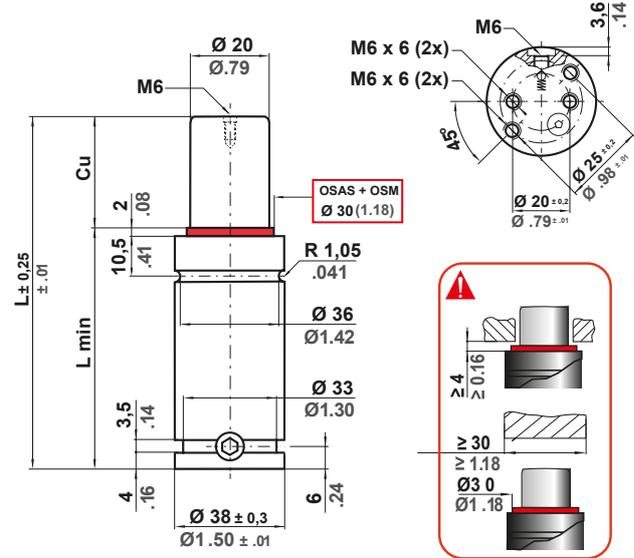

	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 3,14 cm ² 0.487 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV00500C
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓	
RV 500 - 010 - A	◆RV 500 - 010 - B	10	0.39	50	1.97	40	1.57	470	105	± 5%	696	1565	828	1862	11,2	0.68	0,27	0.60	✓
RV 500 - 013 - A	RV 500 - 013 - B	13	0.51	56	2.20	43	1.69				716	1609	859	1931	13,8	0.84	0,25	0.55	✓
RV 500 - 016 - A	RV 500 - 016 - B	16	0.63	62	2.44	46	1.81				730	1641	882	1982	16,3	0.99	0,26	0.57	✓
RV 500 - 019 - A	RV 500 - 019 - B	19	0.75	68	2.68	49	1.93				740	1664	899	2020	18,9	1.15	0,28	0.62	✓
RV 500 - 025 - A	RV 500 - 025 - B	25	0.98	80	3.15	55	2.17				755	1698	922	2074	24,0	1.46	0,31	0.68	✓
RV 500 - 032 - A	RV 500 - 032 - B	32	1.26	94	3.70	62	2.44				766	1723	941	2115	30,0	1.83	0,34	0.75	✓
RV 500 - 038 - A	RV 500 - 038 - B	38	1.50	106	4.17	68	2.68				773	1738	952	2140	35,1	2.14	0,37	0.82	✓
RV 500 - 050 - A	RV 500 - 050 - B	50	1.97	130	5.12	80	3.15				782	1759	967	2173	45,3	2.76	0,43	0.95	✓
RV 500 - 063 - A	RV 500 - 063 - B	63	2.48	156	6.14	93	3.66				789	1773	977	2196	56,4	3.44	0,49	1.08	✓
RV 500 - 075 - A	RV 500 - 075 - B	75	2.95	180	7.09	105	4.13				792	1782	984	2211	66,6	4.06	0,54	1.19	✓
RV 500 - 080 - A	RV 500 - 080 - B	80	3.15	190	7.48	110	4.33	794	1785	986	2216	70,8	4.32	0,57	1.26	✓			
RV 500 - 100 - A	RV 500 - 100 - B	100	3.94	230	9.06	130	5.12	798	1794	992	2231	87,9	5.36	0,66	1.46	✓			
RV 500 - 125 - A	RV 500 - 125 - B	125	4.92	280	11.02	155	6.10	801	1801	998	2243	109,2	6.66	0,78	1.72	✓			

◆ Disposable

