

RV SERIES

RV 750



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	W-DX35-6204 (Ford)
B8 3180 220 000 004(MB)	E24.54.815.G (PSA)	39D 997 (VW)	

SW

OSAS + OSM

OVER STROKE + OVER STROKE MARKER
= ACTIVE SAFETY

OSAS



USAS

OPAS

The new code will be supplied only when the old will be out of stock

* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polyphropic end force at 100% Cu

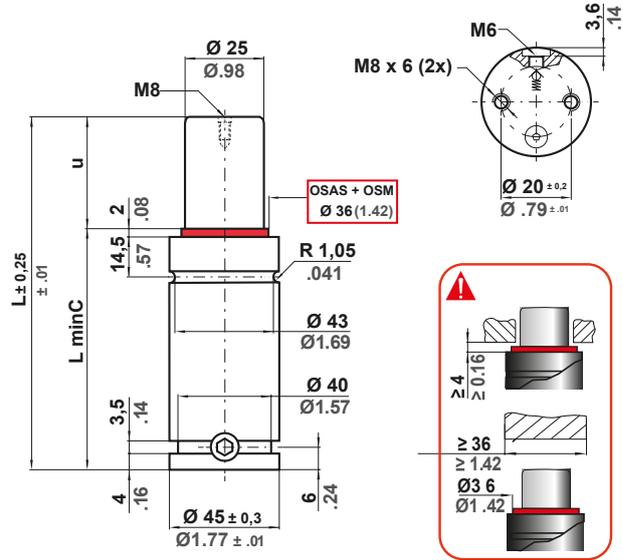

		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P_{max} 150 bar 2175 psi	P_{min} 20 bar 290 psi	S 4.91 cm ² 0.761 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1.8 m/s 70.8 in/s	Maintenance kit 39BMRV00750C
--	--	--------------------------	---------------------------	----------------------------------	--------------------------------	--	----------------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓	
RV 750 - 010 - A	◆ RV 750 - 010 - B	10	0.39	52	2.05	42	1.65	740 1664	1664	1118	2514	1343	3018	16,6	1.01	0,36	0,79	✓	
RV 750 - 013 - A	RV 750 - 013 - B	13	0.51	58	2.28	45	1.77			1152	2590	1396	3139	20,4	1.24	0,38	0,84	✓	
RV 750 - 016 - A	RV 750 - 016 - B	16	0.63	64	2.52	48	1.89			1176	2644	1435	3227	24,1	1.47	0,40	0,88	✓	
RV 750 - 019 - A	RV 750 - 019 - B	19	0.75	70	2.76	51	2.01			1194	2685	1465	3293	27,9	1.70	0,42	0,93	✓	
RV 750 - 025 - A	RV 750 - 025 - B	25	0.98	82	3.23	57	2.24			1220	2743	1507	3388	35,5	2.17	0,45	0,99	✓	
RV 750 - 032 - A	RV 750 - 032 - B	32	1.26	96	3.78	64	2.52			± 5%	1240	2787	1539	3460	44,3	2.70	0,50	1,10	✓
RV 750 - 038 - A	RV 750 - 038 - B	38	1.50	108	4.25	70	2.76			150 bar 2175psi	1251	2813	1558	3503	51,9	3.17	0,54	1,19	✓
RV 750 - 050 - A	RV 750 - 050 - B	50	1.97	132	5.20	82	3.23			+ 20 °C +68 °F	1267	2848	1584	3562	67,0	4.09	0,61	1,34	✓
RV 750 - 063 - A	RV 750 - 063 - B	63	2.48	158	6.22	95	3.74			1278	2873	1602	3602	83,4	5.09	0,70	1,54	✓	
RV 750 - 075 - A	RV 750 - 075 - B	75	2.95	182	7.17	107	4.21			1285	2888	1614	3628	98,5	6.01	0,78	1,72	✓	
RV 750 - 080 - A	RV 750 - 080 - B	80	3.15	192	7.56	112	4.41			1287	2893	1618	3637	104,8	6.40	0,81	1,79	✓	
RV 750 - 100 - A	RV 750 - 100 - B	100	3.94	232	9.13	132	5.20			1294	2909	1629	3663	130,1	7.94	0,94	2,07	✓	
RV 750 - 125 - A	RV 750 - 125 - B	125	4.92	282	11.10	157	6.18			1300	2922	1639	3685	161,6	9.86	1,10	2,43	✓	

◆ Disposable

