

RV SERIES

RV 9500



Ordering-Example:

Special Sizes Available On Request.

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	075.90.60 (FCA)
W-DX35-6204 (Ford)	PG 24D (Mazda)	B8 3180 220 000 004(MB)	39D 997 (VW)

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

SW

ACTIVE SAFETY

OSAS

USAS


OPAS

The new code will be supplied only when the old will be out of stock

easu
MANIFOLD

* F_{1i} = Isothermal end force at 100% Cu

** F_{1p} = Polytrophic end force at 100% Cu

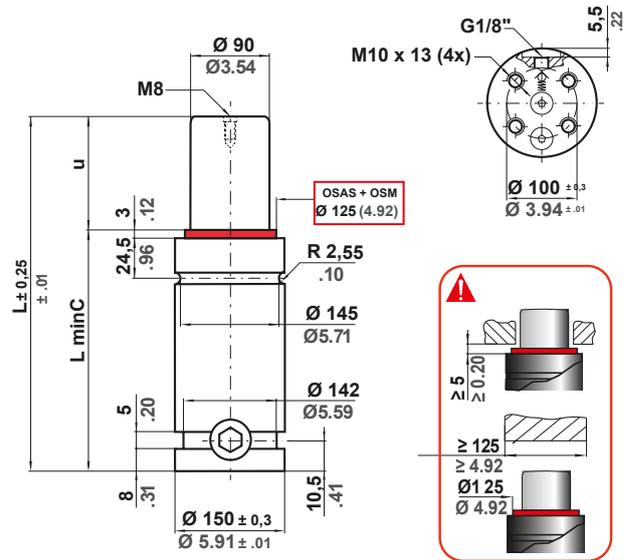

	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 63,62 cm ² 9,864 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70,8 in/s	Maintenance kit 39BMRV09500C
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	------------------------------------------------------------	---------------------------------------	------------------------------------------	----------------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i End force *		F1p End force **		V0		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	
RV 9500 - 019 - A	◆RV 9500 - 019 - B	19	0.75	116	4.57	97	3.82			13135	29528	15265	34318	513	31.31	9,56	21.08	✓
RV 9500 - 025 - A	RV 9500 - 025 - B	25	0.98	128	5.04	103	4.06			13676	30744	16105	36206	609	37.16	9,93	21.89	✓
RV 9500 - 032 - A	RV 9500 - 032 - B	32	1.26	142	5.59	110	4.33			14156	31825	16862	37906	722	44.06	10,37	22.86	✓
RV 9500 - 038 - A	RV 9500 - 038 - B	38	1.50	154	6.06	116	4.57			14480	32553	17376	39062	818	49.92	10,74	23.68	✓
RV 9500 - 050 - A	RV 9500 - 050 - B	50	1.97	178	7.01	128	5.04	9540	21446	14967	33648	18156	40815	1010	61.63	11,49	25.33	✓
RV 9500 - 063 - A	RV 9500 - 063 - B	63	2.48	204	8.03	141	5.55	± 5% 150 bar 2175psi + 20 °C +68 °F		15341	34487	18759	42173	1218	74.33	12,30	27.12	✓
RV 9500 - 075 - A	RV 9500 - 075 - B	75	2.95	228	8.98	153	6.02			15597	35063	19177	43111	1411	86.10	13,05	28.77	✓
RV 9500 - 080 - A	RV 9500 - 080 - B	80	3.15	238	9.37	158	6.22			15686	35264	19322	43439	1491	90.99	13,37	29.48	✓
RV 9500 - 100 - A	RV 9500 - 100 - B	100	3.94	278	10.94	178	7.01			15970	35901	19788	44485	1811	110.51	14,61	32.21	✓
RV 9500 - 125 - A	RV 9500 - 125 - B	120	4.92	328	12.91	203	7.99	16216	36455	20194	45398	2212	134.98	16,18	35.67	✓		

◆ Disposable

