

SL SERIES



Light load springs

Ordering-Example:

SL 27 - 80

Special Sizes Available On Request.

1 N = 0.1 daN = 0.102 kgf

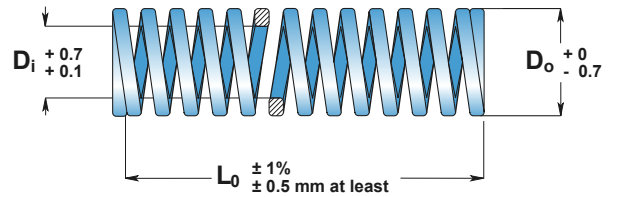

CODE	Do	Di	L0	R	A		B		C		E	Pcs
	Outside Diameter	Inside Diameter	Free Length	Spring Constant	32% L0		36% L0		40% L0		approx.	
	b x h			± 10%	1.000.000 cycles		500.000 cycles		300.000 cycles		do not use	
	mm	mm	mm	Kgf/mm	mm	Kgf (N)	mm	Kgf (N)	mm	Kgf (N)	mm	
SL 10 - 020	10	5	20	1,81	6,4	11.5 (112.8)	7,2	13 (127.5)	8,0	14.5 (142.2)	9,6	50
SL 10 - 025			25	1,45	8,0		9,0		10,0		12,0	50
SL 10 - 030			30	1,21	9,6		10,8		12,0		14,4	50
SL 10 - 035			35	1,03	11,2		12,6		14,0		16,8	50
SL 10 - 040			40	0,90	12,8		14,4		16,0		19,2	50
SL 10 - 045			45	0,80	14,4		16,2		18,0		21,6	50
SL 10 - 050			50	0,73	16,0		18,0		20,0		24,0	25
SL 10 - 055			55	0,66	17,6		19,8		22,0		26,4	25
SL 10 - 060			60	0,60	19,2		21,6		24,0		28,8	25
SL 10 - 065			65	0,55	20,8		23,4		26,0		31,2	25
SL 10 - 070			70	0,51	22,4		25,2		28,0		33,6	25
SL 10 - 075			75	0,48	24,0		27,0		30,0		36,0	25
SL 10 - 080			80	0,45	25,6		28,8		32,0		38,4	25
SL 12 - 020	12	6	20	2,63	6,4	17 (166.7)	7,2	19 (186.3)	8,0	21 (206)	9,6	50
SL 12 - 025			25	2,10	8,0		9,0		10,0		12,0	50
SL 12 - 030			30	1,75	9,6		10,8		12,0		14,4	50
SL 12 - 035			35	1,50	11,2		12,6		14,0		16,8	50
SL 12 - 040			40	1,32	12,8		14,4		16,0		19,2	50
SL 12 - 045			45	1,17	14,4		16,2		18,0		21,6	50
SL 12 - 050			50	1,05	16,0		18,0		20,0		24,0	25
SL 12 - 055			55	0,96	17,6		19,8		22,0		26,4	25
SL 12 - 060			60	0,88	19,2		21,6		24,0		28,8	25
SL 12 - 065			65	0,81	20,8		23,4		26,0		31,2	25
SL 12 - 070			70	0,75	22,4		25,2		28,0		33,6	25
SL 12 - 075			75	0,70	24,0		27,0		30,0		36,0	25
SL 12 - 080			80	0,66	25,6		28,8		32,0		38,4	25
SL 14 - 025	14	7	25	2,80	8,0	22 (216)	9,0	25 (245)	10,0	28 (275)	12,0	50
SL 14 - 030			30	2,34	9,6		10,8		12,0		14,4	50
SL 14 - 035			35	2,00	11,2		12,6		14,0		16,8	50
SL 14 - 040			40	1,75	12,8		14,4		16,0		19,2	50
SL 14 - 045			45	1,56	14,4		16,2		18,0		21,6	25
SL 14 - 050			50	1,40	16,0		18,0		20,0		24,0	25
SL 14 - 055			55	1,27	17,6		19,8		22,0		26,4	25
SL 14 - 060			60	1,17	19,2		21,6		24,0		28,8	25
SL 14 - 065			65	1,08	20,8		23,4		26,0		31,2	25
SL 14 - 070			70	1,00	22,4		25,2		28,0		33,6	25
SL 14 - 075			75	0,93	24,0		27,0		30,0		36,0	25
SL 14 - 080			80	0,87	25,6		28,8		32,0		38,4	20
SL 14 - 090			90	0,77	28,8		32,4		36,0		43,2	20
SL 16 - 025	16	8	25	3,50	8,0	28 (275)	9,0	39 (382)	10,0	43 (422)	12,0	50
SL 16 - 030			30	2,92	9,6		10,8		12,0		14,4	50
SL 16 - 035			35	2,50	11,2		12,6		14,0		16,8	25
SL 16 - 040			40	2,19	12,8		14,4		16,0		19,2	25

SL SERIES

Light load springs

Ordering-Example:

SL 27 - 80

Special Sizes Available On Request.

1 N = 0.1 daN = 0.102 kgf

CODE	Do	Di	L ₀	R		A 40% L ₀		B 45% L ₀		C 50% L ₀	E  approx.	
	Outside Diameter	Inside Diameter	Free Length	Spring Constant								
	b x h			± 10%	1.000.000 cycles		500.000 cycles		300.000 cycles		do not use	
	mm	mm	mm	Kgf/mm	mm	Kgf (N)	mm	Kgf (N)	mm	Kgf (N)	mm	Pcs
SL 16 - 045	16	8	45	1,95	14,4	28 (275)	16,2	32 (314)	18,0	35 (343)	21,6	25
SL 16 - 050			50	1,75	16,0		18,0		20,0		24,0	25
SL 16 - 055			55	1,60	17,6		19,8		22,0		26,4	25
SL 16 - 060			60	1,46	19,2		21,6		24,0		28,8	25
SL 16 - 065			65	1,35	20,8		23,4		26,0		31,2	25
SL 16 - 070			70	1,25	22,4		25,2		28,0		33,6	20
SL 16 - 075			75	1,17	24,0		27,0		30,0		36,0	20
SL 16 - 080			80	1,10	25,6		28,8		32,0		38,4	20
SL 16 - 090			90	0,98	28,8		32,4		36,0		43,2	20
SL 16 - 100			100	0,88	32,0		36,0		40,0		48,0	20
SL 18 - 025	18	9	25	4,30	8,0	34 (333)	9,0	39 (382)	10,0	43 (422)	12,0	50
SL 18 - 030			30	3,58	9,6		10,8		12,0		14,4	50
SL 18 - 035			35	3,07	11,2		12,6		14,0		16,8	25
SL 18 - 040			40	2,69	12,8		14,4		16,0		19,2	25
SL 18 - 045			45	2,39	14,4		16,2		18,0		21,6	25
SL 18 - 050			50	2,15	16,0		18,0		20,0		24,0	25
SL 18 - 055			55	1,69	17,6		19,8		22,0		26,4	25
SL 18 - 060			60	1,79	19,2		21,6		24,0		28,8	25
SL 18 - 065			65	1,66	20,8		23,4		26,0		31,2	25
SL 18 - 070			70	1,54	22,4		25,2		28,0		33,6	25
SL 18 - 075			75	1,44	24,0		27,0		30,0		36,0	25
SL 18 - 080			80	1,35	25,6		28,8		32,0		38,4	20
SL 18 - 090			90	1,20	28,8		32,4		36,0		43,2	20
SL 18 - 100			100	1,07	32,0		36,0		40,0		48,0	20
SL 20 - 025	20	10	25	5,40	8,0	43 (422)	9,0	49 (481)	10,0	54 (530)	12,0	50
SL 20 - 030			30	4,50	9,6		10,8		12,0		14,4	50
SL 20 - 035			35	3,86	11,2		12,6		14,0		16,8	25
SL 20 - 040			40	3,38	12,8		14,4		16,0		19,2	25
SL 20 - 045			45	3,00	14,4		16,2		18,0		21,6	25
SL 20 - 050			50	2,70	16,0		18,0		20,0		24,0	25
SL 20 - 055			55	2,45	17,6		19,8		22,0		26,4	25
SL 20 - 060			60	2,25	19,2		21,6		24,0		28,8	25
SL 20 - 065			65	2,08	20,8		23,4		26,0		31,2	25
SL 20 - 070			70	1,93	22,4		25,2		28,0		33,6	25
SL 20 - 075			75	1,80	24,0		27,0		30,0		36,0	25
SL 20 - 080			80	1,69	25,6		28,8		32,0		38,4	20
SL 20 - 090			90	1,50	28,8		32,4		36,0		43,2	20
SL 20 - 100			100	1,35	32,0		36,0		40,0		48,0	20
SL 20 - 125			125	1,08	40,0		45,0		50,0		60,0	10
SL 20 - 150			150	0,90	48,0		54,0		60,0		72,0	10
SL 22 - 025	22	11	25	6.70	8.0	54 (530)	9.0	60 (588)	10.0	67 (657)	12.0	50
SL 22 - 030			30	5.60	9.6		10.8		12.0		14.4	25
SL 22 - 035			35	4.80	11.2		12.6		14.0		16.8	25
SL 22 - 040			40	4.20	12.8		14.4		16.0		19.2	25
SL 22 - 045			45	3.72	14.4		16.2		18.0		21.6	25

SL SERIES

Light load springs

Ordering-Example:

SL 27 - 80

Special Sizes Available On Request.

1 N = 0.1 daN = 0.102 kgf

CODE	Do	Di	L ₀	R	 40% A	 45% B	 50% C	 E				
	Outside Diameter	Inside Diameter	Free Length	Spring Constant	1.000.000 cycles	500.000 cycles	300.000 cycles	 approx.				
	b x h			± 10%				do not use				
	mm	mm	mm	Kgf/mm	mm	Kgf (N)	mm	Kgf (N)	mm	Kgf (N)	mm	Pcs
SL 22 - 050	22	11	50	3,35	16,0	54 (530)	18,0	60 (588)	20,0	67 (657)	24,0	25
SL 22 - 055			55	3,05	17,6		19,8		22,0		26,4	25
SL 22 - 060			60	2,80	19,2		21,6		24,0		28,8	25
SL 22 - 065			65	2,58	20,8		23,4		26,0		31,2	25
SL 22 - 070			70	2,40	22,4		25,2		28,0		33,6	20
SL 22 - 075			75	2,23	24,0		27,0		30,0		36,0	20
SL 22 - 080			80	2,10	25,6		28,8		32,0		38,4	20
SL 22 - 090			90	1,86	28,8		32,4		36,0		43,2	20
SL 22 - 100			100	1,68	32,0		36,0		40,0		48,0	20
SL 22 - 125			125	1,34	40,0		45,0		50,0		60,0	10
SL 22 - 150			150	1,12	48,0		54,0		60,0		72,0	10
SL 25 - 025	25	12,5	25	8,40	8,0	67 (657)	9,0	76 (745)	10,0	84 (824)	12,0	50
SL 25 - 030			30	7,00	9,6		10,8		12,0		14,4	25
SL 25 - 035			35	6,00	11,2		12,6		14,0		16,8	25
SL 25 - 040			40	5,25	12,8		14,4		16,0		19,2	25
SL 25 - 045			45	4,67	14,4		16,2		18,0		21,6	25
SL 25 - 050			50	4,20	16,0		18,0		20,0		24,0	25
SL 25 - 055			55	3,82	17,6		19,8		22,0		26,4	25
SL 25 - 060			60	3,50	19,2		21,6		24,0		28,8	25
SL 25 - 065			65	3,23	20,8		23,4		26,0		31,2	25
SL 25 - 070			70	3,00	22,4		25,2		28,0		33,6	20
SL 25 - 075			75	2,80	24,0		27,0		30,0		36,0	20
SL 25 - 080			80	2,63	25,6		28,8		32,0		38,4	20
SL 25 - 090			90	2,33	28,8		32,4		36,0		43,2	20
SL 25 - 100			100	2,10	32,0		36,0		40,0		48,0	20
SL 25 - 125			125	1,68	40,0		45,0		50,0		60,0	10
SL 25 - 150			150	1,40	48,0		54,0		60,0		72,0	10
SL 25 - 175			175	1,20	56,0		63,0		70,0		84,0	10
SL 27 - 025	27	13.5	25	10,00	8,0	80 (785)	9,0	90 (883)	10,0	100 (981)	12,0	20
SL 27 - 030			30	8,33	9,6		10,8		12,0		14,4	20
SL 27 - 035			35	7,14	11,2		12,6		14,0		16,8	20
SL 27 - 040			40	6,25	12,8		14,4		16,0		19,2	20
SL 27 - 045			45	5,56	14,4		16,2		18,0		21,6	20
SL 27 - 050			50	5,00	16,0		18,0		20,0		24,0	20
SL 27 - 055			55	4,55	17,6		19,8		22,0		26,4	20
SL 27 - 060			60	4,17	19,2		21,6		24,0		28,8	20
SL 27 - 065			65	3,85	20,8		23,4		26,0		31,2	20
SL 27 - 070			70	3,57	22,4		25,2		28,0		33,6	20
SL 27 - 075			75	3,33	24,0		27,0		30,0		36,0	20
SL 27 - 080			80	3,13	25,6		28,8		32,0		38,4	10
SL 27 - 090			90	2,78	28,8		32,4		36,0		43,2	10
SL 27 - 100			100	2,50	32,0		36,0		40,0		48,0	10
SL 27 - 125			125	2,00	40,0		45,0		50,0		60,0	10
SL 27 - 150			150	1,67	48,0		54,0		60,0		72,0	10
SL 27 - 175			175	1,43	56,0		63,0		70,0		84,0	5

SL SERIES

Light load springs

Ordering-Example:
SL 27 - 80

Special Sizes Available On Request.
1 N = 0.1 daN = 0.102 kgf

CODE	Do	Di	L ₀	R	 40% A	 45% B	 50% C	 E				
	Outside Diameter	Inside Diameter	Free Length	Spring Constant								
	b x h			± 10%	1.000.000 cycles	500.000 cycles	300.000 cycles	do not use				
	mm	mm	mm	Kgf/mm	mm	Kgf (N)	mm	Kgf (N)	mm	Pcs		
SLR 30 - 025	30	16	25	12,11	8,0	91.2 (893.8)	9,0	102.6 (1,005.5)	10,0	114 (1,117.2)	12,0	20
SLR 30 - 030			30	10,08	9,6		10,8		12,0		14,4	20
SLR 30 - 035			35	8,65	11,2		12,6		14,0		16,8	20
SLR 30 - 040			40	7,56	12,8		14,4		16,0		19,2	20
SLR 30 - 045			45	6,73	14,4		16,2		18,0		21,6	20
SLR 30 - 050			50	6,05	16,0		18,0		20,0		24,0	20
SLR 30 - 055			55	5,50	17,6		19,8		22,0		26,4	20
SLR 30 - 060			60	5,04	19,2		21,6		24,0		28,8	20
SLR 30 - 065			65	4,65	20,8		23,4		26,0		31,2	20
SLR 30 - 070			70	4,32	22,4		25,2		28,0		33,6	20
SLR 30 - 075			75	4,03	24,0		27,0		30,0		36,0	20
SLR 30 - 080			80	3,78	25,6		28,8		32,0		38,4	10
SLR 30 - 090			90	3,36	28,8		32,4		36,0		43,2	10
SLR 30 - 100			100	3,02	32,0		36,0		40,0		48,0	10
SLR 30 - 125			125	2,42	40,0		45,0		50,0		60,0	10
SLR 30 - 150			150	2,01	48,0		54,0		60,0		72,0	10
SLR 30 - 175			175	1,72	56,0		63,0		70,0		84,0	5
SLR 30 - 200			200	1,51	64,0		72,0		80,0		96,0	5
SL 35 - 040	35	17,5	40	10,31	12,8	132 (1,295)	14,4	149 (1,461)	16,0	165 (1,618)	19,2	20
SL 35 - 045			45	9,17	14,4		16,2		18,0		21,6	20
SL 35 - 050			50	8,25	16,0		18,0		20,0		24,0	20
SL 35 - 055			55	7,50	17,6		19,8		22,0		26,4	10
SL 35 - 060			60	6,87	19,2		21,6		24,0		28,8	10
SL 35 - 065			65	6,35	20,8		23,4		26,0		31,2	10
SL 35 - 070			70	5,89	22,4		25,2		28,0		33,6	10
SL 35 - 075			75	5,50	24,0		27,0		30,0		36,0	10
SL 35 - 080			80	5,15	25,6		28,8		32,0		38,4	10
SL 35 - 090			90	4,58	28,8		32,4		36,0		43,2	10
SL 35 - 100			100	4,12	32,0		36,0		40,0		48,0	10
SL 35 - 125			125	3,30	40,0		45,0		50,0		60,0	5
SL 35 - 150			150	2,75	48,0		54,0		60,0		72,0	5
SL 35 - 175			175	2,35	56,0		63,0		70,0		84,0	5
SL 35 - 200			200	2,06	64,0		72,0		80,0		96,0	5
SLR 35 - 040	35	20,5	40	9,15	12,8	114.6 (1,123.1)	14,4	128.9 (1,263.2)	16,0	143.2 (1,403.4)	19,2	20
SLR 35 - 045			45	8,42	14,4		16,2		18,0		21,6	20
SLR 35 - 050			50	7,85	16,0		18,0		20,0		24,0	20
SLR 35 - 055			55	7,42	17,6		19,8		22,0		26,4	10
SLR 35 - 060			60	6,70	19,2		21,6		24,0		28,8	10
SLR 35 - 065			65	6,25	20,8		23,4		26,0		31,2	10
SLR 35 - 070			70	5,45	22,4		25,2		28,0		33,6	10
SLR 35 - 075			75	5,28	24,0		27,0		30,0		36,0	10
SLR 35 - 080			80	4,90	25,6		28,8		32,0		38,4	10
SLR 35 - 090			90	4,20	28,8		32,4		36,0		43,2	10
SLR 35 - 100			100	3,75	32,0		36,0		40,0		48,0	10
SLR 35 - 125			125	3,00	40,0		45,0		50,0		60,0	5

SL SERIES

Light load springs

Ordering-Example:

SL 27 - 80

Special Sizes Available On Request.

1 N = 0.1 daN = 0.102 kgf

CODE	Do	Di	L ₀	R		A 40% L ₀		B 45% L ₀		C 50% L ₀	E  approx.	
	Outside Diameter	Inside Diameter	Free Length	Spring Constant	1.000.000 cycles		500.000 cycles		300.000 cycles		do not use	Pcs
	b x h			± 10%								
	mm	mm	mm	Kgf/mm	mm	Kgf (N)	mm	Kgf (N)	mm	Kgf (N)	mm	
SLR 35 - 150	35	20,5	150	2,40	48,0		54,0		60,0		72,0	5
SLR 35 - 175			175	2,20	56,0		63,0		70,0		84,0	5
SLR 35 - 200			200	1,80	64,0		72,0		80,0		96,0	5
SL 40 - 040	40	20	40	13,50	12,8		14,4		16,0		19,2	20
SL 40 - 045			45	12,00	14,4		16,2		18,0		21,6	20
SL 40 - 050			50	10,80	16,0		18,0		20,0		24,0	20
SL 40 - 055			55	9,80	17,6		19,8		22,0		26,4	20
SL 40 - 060			60	9,00	19,2		21,6		24,0		28,8	10
SL 40 - 065			65	8,29	20,8		23,4		26,0		31,2	10
SL 40 - 070			70	7,71	22,4		25,2		28,0		33,6	10
SL 40 - 075			75	7,19	24,0		27,0		30,0		36,0	10
SL 40 - 080			80	6,75	25,6		28,8		32,0		38,4	10
SL 40 - 090			90	6,00	28,8		32,4		36,0		43,2	10
SL 40 - 100			100	5,40	32,0		36,0		40,0		48,0	10
SL 40 - 125			125	4,32	40,0		45,0		50,0		60,0	5
SL 40 - 150			150	3,60	48,0		54,0		60,0		72,0	5
SL 40 - 175			175	3,08	56,0		63,0		70,0		84,0	5
SL 40 - 200			200	2,70	64,0		72,0		80,0		96,0	5
SL 40 - 250			250	2,16	80,0		90,0		100,0		120,0	2
SLR 40 - 040	40	25,5	40	9,30	12,8		14,4		16,0		19,2	20
SLR 40 - 050			50	7,75	16,0		18,0		20,0		24,0	20
SLR 40 - 060			60	6,20	19,2		21,6		24,0		28,8	10
SLR 40 - 070			70	5,00	22,4		25,2		28,0		33,6	10
SLR 40 - 080			80	4,35	25,6		28,8		32,0		38,4	10
SLR 40 - 090			90	3,85	28,8		32,4		36,0		43,2	10
SLR 40 - 100			100	3,50	32,0		36,0		40,0		48,0	10
SLR 40 - 125			125	2,80	40,0		45,0		50,0		60,0	5
SLR 40 - 150			150	2,25	48,0		54,0		60,0		72,0	5
SLR 40 - 175			175	1,95	56,0		63,0		70,0		84,0	5
SLR 40 - 200			200	1,65	64,0		72,0		80,0		96,0	5
SLR 40 - 250			250	1,50	80,0		90,0		100,0		120,0	2
SL 50 - 050	50	25	50	16,89	16,0		18,0		20,0		24,0	5
SL 50 - 055			55	15,35	17,6		19,8		22,0		26,4	5
SL 50 - 060			60	14,08	19,2		21,6		24,0		28,8	5
SL 50 - 065			65	12,99	20,8		23,4		26,0		31,2	5
SL 50 - 070			70	12,07	22,4		25,2		28,0		33,6	5
SL 50 - 075			75	11,25	24,0		27,0		30,0		36,0	5
SL 50 - 080			80	10,56	25,6		28,8		32,0		38,4	5
SL 50 - 090			90	9,38	28,8		32,4		36,0		43,2	5
SL 50 - 100			100	8,45	32,0		36,0		40,0		48,0	5
SL 50 - 125			125	6,76	40,0		45,0		50,0		60,0	5
SL 50 - 150			150	5,63	48,0		54,0		60,0		72,0	2
SL 50 - 175			175	4,82	56,0		63,0		70,0		84,0	2
SL 50 - 200			200	4,22	64,0		72,0		80,0		96,0	2
SL 50 - 250			250	3,38	80,0		90,0		100,0		120,0	2

SL SERIES

Light load springs

Ordering-Example:
SL 27 - 80

Special Sizes Available On Request.
1 N = 0.1 daN = 0.102 kgf

CODE	Do	Di	L ₀	R		A 40% L ₀		B 45% L ₀		C 50% L ₀	E  approx.	
	Outside Diameter	Inside Diameter	Free Length	Spring Constant	1.000.000 cycles	500.000 cycles	300.000 cycles	do not use				
	b x h											
	mm	mm	mm	Kgf/mm	mm	Kgf (N)	mm	Kgf (N)	mm	Kgf (N)	mm	Pcs
SL 50 - 300	50	25	300	2.81	96.0	270 (2,650)	108.0	304 (2,980)	120.0	338 (3,310)	144.0	2
SLR 50 - 050	50	30,5	50	11,90	16,0	200.8 (1,967.8)	18,0	225.9 (2,213.8)	20,0	251 (2,459.8)	24,0	5
SLR 50 - 060			60	10,60	19,2		21,6		24,0		28,8	5
SLR 50 - 070			70	9,00	22,4		25,2		28,0		33,6	5
SLR 50 - 080			80	7,65	25,6		28,8		32,0		38,4	5
SLR 50 - 090			90	6,75	28,8		32,4		36,0		43,2	5
SLR 50 - 100			100	5,85	32,0		36,0		40,0		48,0	5
SLR 50 - 125			125	4,90	40,0		45,0		50,0		60,0	5
SLR 50 - 150			150	3,55	48,0		54,0		60,0		72,0	2
SLR 50 - 175			175	3,00	56,0		63,0		70,0		84,0	2
SLR 50 - 200			200	2,65	64,0		72,0		80,0		96,0	2
SLR 50 - 250			250	2,40	80,0		90,0		100,0		120,0	2
SLR 50 - 300			300	2,20	96,0		108,0		120,0		144,0	2
SL 60 - 060	60	30	60	20,25	19,2	389 (3,810)	21,6	437 (4,290)	24,0	486 (4,770)	28,8	5
SL 60 - 070			70	17,35	22,4		25,2		28,0		33,6	5
SL 60 - 080			80	15,18	25,6		28,8		32,0		38,4	5
SL 60 - 090			90	13,50	28,8		32,4		36,0		43,2	5
SL 60 - 100			100	12,13	32,0		36,0		40,0		48,0	5
SL 60 - 125			125	9,72	40,0		45,0		50,0		60,0	2
SL 60 - 150			150	8,10	48,0		54,0		60,0		72,0	2
SL 60 - 175			175	6,94	56,0		63,0		70,0		84,0	2
SL 60 - 200			200	6,07	64,0		72,0		80,0		96,0	2
SL 60 - 250			250	4,86	80,0		90,0		100,0		120,0	2
SL 60 - 300			300	4,05	96,0		108,0		120,0		144,0	2
SLR 60 - 060			60	35,5	60		16,80		19,2		310.1 (3,039)	21,6
SLR 60 - 070	70	14,40			22,4	25,2	28,0	33,6	5			
SLR 60 - 080	80	12,10			25,6	28,8	32,0	38,4	5			
SLR 60 - 090	90	10,65			28,8	32,4	36,0	43,2	5			
SLR 60 - 100	100	9,80			32,0	36,0	40,0	48,0	5			
SLR 60 - 125	125	8,50			40,0	45,0	50,0	60,0	2			
SLR 60 - 150	150	6,80			48,0	54,0	60,0	72,0	2			
SLR 60 - 175	175	6,00			56,0	63,0	70,0	84,0	2			
SLR 60 - 200	200	5,20			64,0	72,0	80,0	96,0	2			
SLR 60 - 250	250	3,90			80,0	90,0	100,0	120,0	2			
SLR 60 - 300	300	3,10			96,0	108,0	120,0	144,0	2			