


N 155

Ball Guiding Pin Without Collar Screwable

See Data Sheet Tightening Torques Group 19

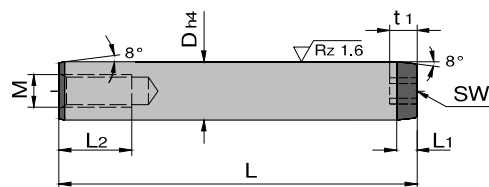

Ordering-Example:

1 Piece N155 Ø10/60

New

Special Sizes Available On Request

Material: 1.7139 ca. 700HV

| M | L1 | L2 | SW | T1 | D | L |
|----|----|----|----|----|----|-----|
| 6 | 4 | 16 | 4 | 4 | 10 | 60 |
| | | | | | | 80 |
| | | | | | | 100 |
| | | | | | | 120 |
| | | | | | | 140 |
| 8 | 4 | 17 | 5 | 5 | 12 | 80 |
| | | | | | | 100 |
| | | | | | | 120 |
| | | | | | | 140 |
| | | | | | | 160 |
| 10 | 5 | 20 | 6 | 6 | 18 | 80 |
| | | | | | | 100 |
| | | | | | | 120 |
| | | | | | | 140 |
| | | | | | | 160 |
| | | | | | | 180 |
| 12 | 6 | 25 | 8 | 8 | 24 | 100 |
| | | | | | | 120 |
| | | | | | | 140 |
| | | | | | | 160 |
| | | | | | | 180 |
| | | | | | | 200 |
| 16 | 7 | 30 | 8 | 8 | 30 | 140 |
| | | | | | | 160 |
| | | | | | | 180 |
| | | | | | | 200 |
| | | | | | | 250 |