




Guide strips

KD T1475

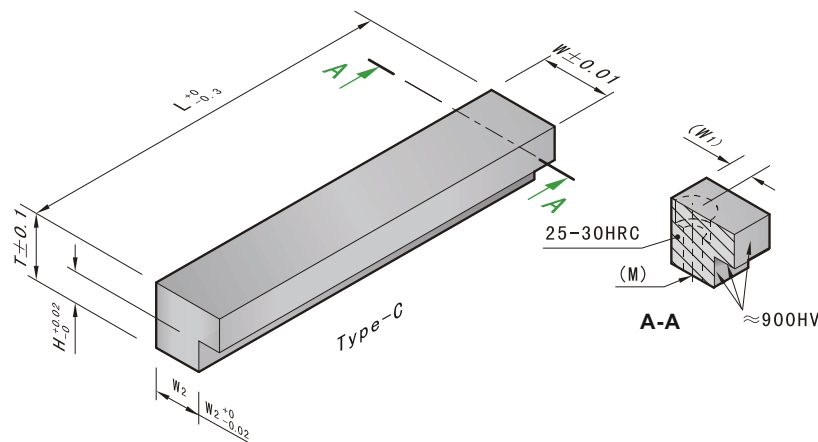

KDT1475-T-H-L **M** Material:P20 **H** Hardness:≈900HV

| T  | H  | L   |    | W1 | W2 | M   |  |
|----|----|-----|----|----|----|-----|--|
| 12 | 6  | 40  | 16 | 6  | 12 | M 5 |  |
|    |    | 50  |    |    |    |     |  |
|    |    | 63  |    |    |    |     |  |
|    |    | 80  |    |    |    |     |  |
|    |    | 100 |    |    |    |     |  |
| 16 | 8  | 63  | 20 | 9  | 15 | M 6 |  |
|    |    | 80  |    |    |    |     |  |
|    |    | 100 |    |    |    |     |  |
|    |    | 125 |    |    |    |     |  |
|    |    | 160 |    |    |    |     |  |
| 20 | 11 | 63  | 25 | 11 | 19 | M 8 |  |
|    |    | 80  |    |    |    |     |  |
|    |    | 100 |    |    |    |     |  |
|    |    | 125 |    |    |    |     |  |
|    |    | 160 |    |    |    |     |  |
| 25 | 13 | 160 | 32 | 14 | 24 | M10 |  |
|    |    | 80  |    |    |    |     |  |
|    |    | 100 |    |    |    |     |  |
|    |    | 125 |    |    |    |     |  |
|    |    | 160 |    |    |    |     |  |
| 32 | 16 | 100 |    |    |    |     |  |
|    |    | 125 |    |    |    |     |  |
|    |    | 160 |    |    |    |     |  |
|    |    | 200 |    |    |    |     |  |
|    |    | 250 |    |    |    |     |  |
| 40 | 20 | 125 |    |    |    |     |  |
|    |    | 160 |    |    |    |     |  |
|    |    | 200 |    |    |    |     |  |
|    |    | 250 |    |    |    |     |  |
|    |    | 315 |    |    |    |     |  |
| 50 |    | 160 |    |    |    |     |  |
|    |    | 200 |    |    |    |     |  |
|    |    | 250 |    |    |    |     |  |
|    |    | 315 |    |    |    |     |  |
|    |    | 315 |    |    |    |     |  |