



DIN

Angle pin housing

KGGR

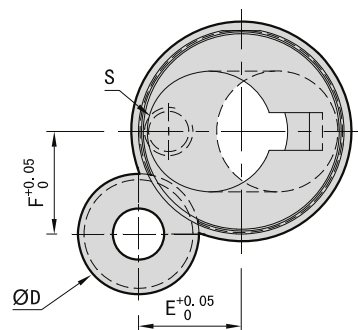

Cooperate with GGI

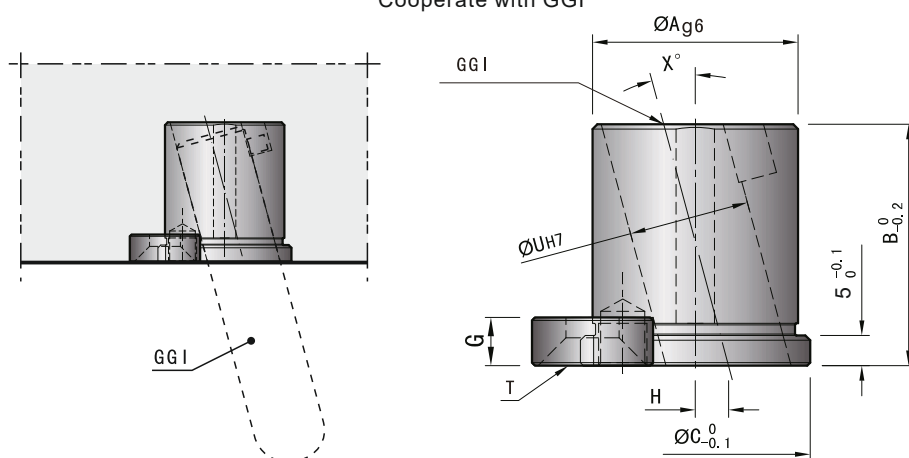

Material:SUJ2 Hard :58-62HRC

Code	A	B	C	D	E	F	G	H	S	T	U	X°	
KGGR-182622-10	18	26	22	12	10.8	7.5		3.8	M5×5	M5×16	10	10	
KGGR-222826-10	22	28	26		11	11	6	4	M6×6	M6×16	12		
KGGR-283432-10	28	34	32	16	13	13		5			16		
KGGR-344038-10	34	40	38		17	17		5.5	M8×6	M8×20	20		
KGGR-424546-10	42	45	46	20	19.5	19.5	8	6			24		
KGGR-465050-10	46	50	50		21	21		7			28	15	
KGGR-182622-15	18	26	22	12	10.8	7.5		3.8	M5×5	M5×16	10		
KGGR-222826-15	22	28	26		11	11	6	4	M6×6	M6×16	12		
KGGR-283432-15	28	34	32	16	13	13		5			16		
KGGR-344038-15	34	40	38		17	17		5.5	M8×6	M8×20	20		
KGGR-424546-15	42	45	46	20	19.5	19.5	8	6			24		
KGGR-465050-15	46	50	50		21	21		7			28		

1. Only need machining one installation hole, and apply together with specialized angle pin. Do not need machine angle hole.
2. Two size of 10° and 15° for your choose.
3. Apply together with GGI.
4. Within spacer and mounting screw (T).