


## N50

Insulating Board P = 600 N/mm<sup>2</sup>

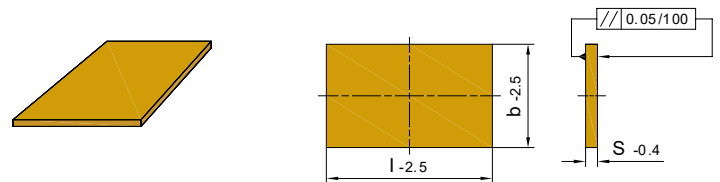

Ordering-Example:  
1 Piece

**Special Sizes Available On Request.**  
N50 95/95/3

Application Temperature: 200°C


Thermal Conductivity: 0,19 W/mk  
Dense: 1,9 g/cm<sup>3</sup>

| b   | l   | S |
|-----|-----|---|
| 95  | 95  | 3 |
| 100 | 130 |   |
| 156 | 156 |   |
|     | 196 |   |
|     | 246 |   |
| 190 | 246 |   |
| 196 | 196 |   |
|     | 246 |   |
| 206 | 156 |   |
|     | 196 |   |
|     |     |   |
| 95  | 95  | 5 |
| 100 | 130 |   |
| 156 | 156 |   |
|     | 196 |   |
|     | 246 |   |
|     | 296 |   |
| 190 | 396 |   |
|     | 246 |   |
|     | 296 |   |
| 196 | 246 |   |
|     | 296 |   |
|     | 346 |   |
| 206 | 156 |   |
|     | 196 |   |
| 218 | 246 |   |
|     | 296 |   |
| 246 | 246 |   |
|     | 296 |   |
|     | 346 |   |
|     | 396 |   |
| 254 | 246 |   |
| 276 | 246 |   |
| 126 | 156 | 6 |
| 156 | 246 |   |
|     | 156 |   |
|     | 196 |   |
|     | 206 |   |
|     | 246 |   |
|     | 296 |   |
|     | 346 |   |
|     | 396 |   |
|     | 446 |   |
|     |     |   |

| b   | l   | S |
|-----|-----|---|
| 196 | 196 | 6 |
|     | 206 |   |
|     | 246 |   |
|     | 296 |   |
|     | 346 |   |
|     | 396 |   |
|     | 446 |   |
|     | 496 |   |
| 216 | 246 |   |
|     | 296 |   |
|     | 296 |   |
|     | 296 |   |
| 246 | 246 |   |
|     | 266 |   |
|     | 296 |   |
|     | 346 |   |
|     | 396 |   |
|     | 446 |   |
|     | 496 |   |
|     | 546 |   |
| 266 | 596 |   |
|     | 296 |   |
|     |     |   |
| 196 | 296 | 7 |
|     | 346 |   |
|     | 396 |   |
|     | 446 |   |
| 218 | 396 |   |
| 246 | 246 |   |
|     | 296 |   |
|     | 346 |   |
|     | 396 |   |
| 254 | 446 |   |
|     | 246 |   |
|     | 296 |   |
| 276 | 296 |   |
|     | 296 |   |
|     | 346 |   |
|     | 396 |   |
| 346 | 446 |   |
|     | 346 |   |
|     | 396 |   |
|     | 446 |   |
|     | 496 |   |
| 396 | 546 |   |
|     | 396 |   |
|     | 446 |   |
|     | 496 |   |
| 496 | 546 |   |
|     | 546 |   |
|     |     |   |
|     |     |   |

## N50

Insulating Board P = 600 N/mm<sup>2</sup>

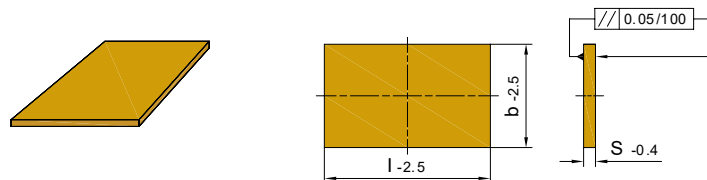

Ordering-Example:  
1 Piece

**Special Sizes Available On Request.**  
N50 296/296/8

Application Temperature: 200°C



Thermal Conductivity: 0,19 W/mk  
Dense: 1,9 g/cm<sup>3</sup>

| b   | l   | S |
|-----|-----|---|
| 296 | 296 | 8 |
|     | 346 |   |
|     | 396 |   |
|     | 446 |   |
|     | 496 |   |
|     | 546 |   |
|     | 596 |   |
|     | 646 |   |
|     | 696 |   |
| 316 | 346 |   |
|     | 396 |   |
|     | 446 |   |
| 346 | 346 |   |
|     | 366 |   |
|     | 396 |   |
|     | 446 |   |
|     | 496 |   |
|     | 546 |   |
|     | 596 |   |
|     | 646 |   |
|     | 696 |   |
|     | 796 |   |
| 366 | 396 |   |
| 396 | 396 |   |
|     | 446 |   |
|     | 496 |   |
|     | 546 |   |
|     | 596 |   |
|     | 646 |   |
|     | 696 |   |
|     | 796 |   |
| 446 | 446 |   |
|     | 496 |   |
|     | 546 |   |
|     | 596 |   |
|     | 646 |   |
|     | 696 |   |
|     | 796 |   |
| 496 | 496 |   |
|     | 546 |   |
|     | 596 |   |
|     | 646 |   |
|     | 696 |   |
|     | 796 |   |
| 546 | 546 |   |
|     | 596 |   |
|     | 646 |   |
|     | 696 |   |
|     | 796 |   |

| b   | l   | S   |
|-----|-----|-----|
| 596 | 596 | 8   |
|     | 646 |     |
|     | 696 |     |
|     | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 646 | 646 |     |
|     | 696 |     |
|     | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 696 | 696 |     |
|     | 746 |     |
|     | 896 |     |
|     | 996 |     |
| 746 | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 796 | 796 |     |
|     | 846 |     |
|     | 896 |     |
|     | 996 |     |
| 846 | 896 |     |
|     | 996 |     |
| 246 | 496 | 8,5 |
| 296 | 296 |     |
|     | 346 |     |
|     | 396 |     |
|     | 446 |     |
|     | 496 |     |
|     | 546 |     |
|     | 596 |     |
|     | 696 |     |
| 346 | 346 |     |
|     | 396 |     |
|     | 446 |     |
|     | 496 |     |
|     | 546 |     |
|     | 596 |     |
|     | 696 |     |
|     | 796 |     |
| 396 | 396 |     |
|     | 446 |     |
|     | 496 |     |
|     | 546 |     |
|     | 596 |     |
|     | 696 |     |
|     | 796 |     |
|     | 896 |     |

## N50

Insulating Board  $P = 600 \text{ N/mm}^2$

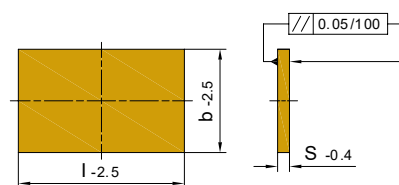

Ordering-Example:  
1 Piece

**Special Sizes Available On Request.**  
N50 446/446/8,5

Application Temperature: 200°C

Thermal Conductivity: 0,19 W/mk  
Dense: 1,9 g/cm<sup>3</sup>

[illegible]

| b   | l   | s   |
|-----|-----|-----|
| 596 | 596 | 8,5 |
|     | 696 |     |
|     | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 646 | 596 |     |
|     | 696 |     |
|     | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 696 | 696 |     |
|     | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 796 | 796 |     |
|     | 896 |     |
|     | 996 |     |
| 896 | 896 |     |
|     | 996 |     |
|     |     |     |