
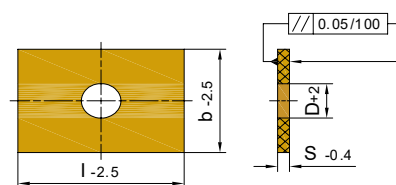


N51

Insulating Board P = 600 N/mm²



Ordering-Example:
1 Piece

Special Sizes Available On Request.
N51 95/95/3/22

Application Temperature: 200°C



Thermal Conductivity: 0,19 W/mk
Dense: 1,9 g/cm³

b	l	S	D
95	95	3	22
100	130	3	90
156	156		
	196		
	246		
190	246		
196	196		
	246	5	90
206	156		
	196		
95	95		
100	130		
156	156		
	196		
	246		
	296		
	396		
190	246		
	296		
196	196		
	246		
	296		
	346		
206	156		
	196		
218	246		
	296		
246	246		
	296		
	346		
	396		
254	246		
276	246		
		6	90
126	156		
	246		
156	156		
	196		
	206		
	246		
	296		
	346		
	296		
	446		

b	l	S	D
196	196	6	90
	206		
	246		
	296		
	346		
	396		
	446		
216	496		
	246		
	296		
	396		
246	246		
	266		
	296		
	346		
	396		
	446		
	496		
	546		
266	596		
	296		
196	296	7	90
	346		
	396		
	446		
218	396		
246	246		
	296		
	346		
	396		
	446		
	246		
	296		
	296		
296	346		
	296		
	446		
	446		
346	346		
	396		
	446		
	496		
396	546		
	396		
	446		
	496		
496	546		
	546		

N51

Insulating Board P = 600 N/mm²

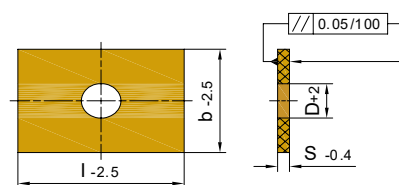

Ordering-Example:
1 Piece

Special Sizes Available On Request.
N51 296/296/8/90

Application Temperature: 200°C



Thermal Conductivity: 0,19 W/mk
Dense: 1,9 g/cm³

b	l	S	D
296	296	8	90
	346		
	396		
	446		
	496		
	546		
	596		
	646		
	696		
316	346		
	396		
	446		
346	346		
	366		
	396		
	446		
	496		
	546		
	596		
	646		
366	396		
396	396		
	446		
	496		
	546		
	596		
	646		
	696		
446	446		
	496		
	546		
	596		
	646		
	696		
	796		
	796		
496	496		
	546		
	596		
	646		
	696		
	796		
	796		
	796		
546	546		
	596		
	646		
	696		
	796		
	796		
	796		
	796		

b	l	S	D
596	596	8	90
646	646		
	696		
	796		
	646		
	696		
	796		
	796		
	796		
246	496	8,5	90
296	296		
	346		
	396		
	446		
	496		
	546		
	696		
	696		
346	346		
	396		
	446		
	496		
	546		
	596		
	696		
	796		
396	396		
	446		
	496		
	546		
	596		
	696		
	796		
	896		
446	446		
	496		
	546		
	596		
	696		
	796		
	896		
	896		
496	496		
	546		
	596		
	696		
	796		
	896		
	996		
	996		

N51

Insulating Board P = 600 N/mm²

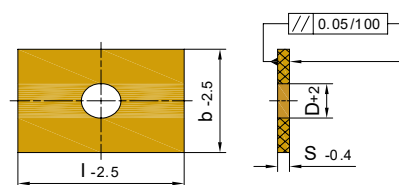

Ordering-Example:
1 Piece

Special Sizes Available On Request.
N51 95/95/3/22

Application Temperature: 200°C

Thermal Conductivity: 0,19 W/mk
Dense: 1,9 g/cm³

b	l	S	D
596	546	8,5	90
	596		
	646		
	696		
	796		
	896		
	996		
596	596		
	696		
	796		
	896		
	996		

b	l	S	D
646	596	8,5	90
	696		
	796		
	896		
	996		
696	696		
	796		
	896		
	996		
	696		
	796		
	896		
696	696		
	796		
	896		
	996		
	796		
	896		
796	796		
	896		
	996		
	996		
	896		
	996		