
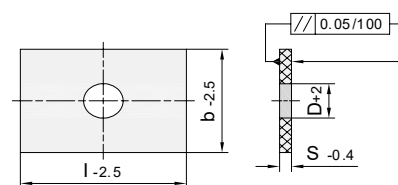


N53

Insulating Board P = 330 N/mm²



Ordering-Example:
1 Piece

Special Sizes Available On Request.
N53 95/95/3/22

Application Temperature: 200°C




Thermal Conductivity: 0,18 W/mk
Dense: 1,8 g/cm³

b	l	S	D
95	95	3	22
100	130		
156	156		90
	196		
	246		
	296		
	396		
190	246		
	296		
196	196		
	246		
	296		
	346		
206	156		
	196		
218	246		
	296		
246	246		
	296		
254	246		
276	246		
	296		
296	296		
95	95	5	22
100	130		
156	156		90
	196		
	246		
	296		
	396		
190	246		
	296		
196	196		
	246		
	296		
	346		
	396		
	446		
206	156		
	196		
218	246		
	296		
	396		
246	246		
	296		
	346		
	396		
	446		
	496		

b	l	S	D
254	246		
276	246	5	90
296	296		
	346		
	396		
	446		
	496		
	546		
	596		
346	346		
	396		
	446		
	496		
	546		
396	396		
	446		
	496		
126	156	6	90
	246		
156	156		
	196		
	206		
	246		
	296		
	346		
	396		
	446		
	496		
196	196		
	206		
	246		
	296		
	346		
	396		
	446		
	496		
216	246		
	296		
	396		
246	246		
	266		
	296		
	346		
	396		
	446		
	496		
	546		
	596		
266	296		

N53

Insulating Board P = 330 N/mm²



Ordering-Example:
1 Piece

Special Sizes Available On Request.
N53 196/296/7/90

Application Temperature: 200°C




Thermal Conductivity: 0,18 W/mk
Dense: 1,8 g/cm³

b	l	S	D
196	296	7	90
	346		
	396		
	446		
218	396		
246	246		
	296		
	346		
	396		
	446		
254	246		
276	296		
296	296		
	346		
	396		
	446		
346	346		
	396		
	446		
	496		
	546		
396	396		
	446		
	496		
	546		
496	546		
296	296	8	90
	346		
	396		
	446		
	496		
	546		
	596		
	646		
	696		
316	346		
	396		
	446		
346	346		
	396		
	446		
	496		
	546		
	596		
	646		
	696		
	796		
366	396		

b	l	S	D
396	396	8	90
	446		
	496		
	546		
	596		
	646		
	696		
	796		
446	446		
	496		
	546		
	596		
	646		
	696		
	796		
496	496		
	546		
	596		
	646		
	696		
	796		
546	546		
	596		
	646		
	696		
	796		
596	596		
	646		
	696		
	796		
246	496	8,5	90
296	296		
	346		
	396		
	446		
	496		
	546		
	596		
	696		

N53

Insulating Board P = 330 N/mm²



Ordering-Example:
1 Piece

Special Sizes Available On Request.
N53 396/396/8,5/90

Application Temperature: 200°C

Thermal Conductivity: 0,18 W/mk
Dense: 1,8 g/cm³

b	l	S	D
346	346		
	396		
	446		
	496		
	546		
	596		
	696		
	796		
396	396	8,5	90
	446		
	496		
	546		
	596		
	696		
	796		
	896		
446	446		
	496		
	546		
	596		
	696		
496	496		
	546		
	596		
	696		
	796		
	896		
	996		

b	l	S	D
546	546	8,5	90
	596		
	646		
	696		
	796		
	896		
	996		
596	596		
	696		
	796		
	896		
646	596		
	696		
	796		
	896		
696	696		
	796		
	896		
	996		
796	796		
	896		
	996		
896	896		
	996		