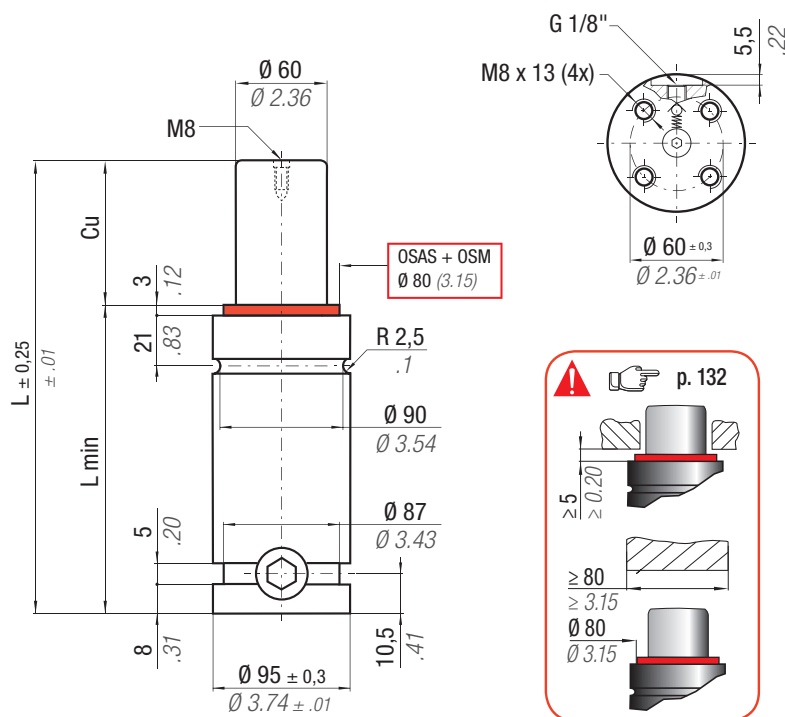


ISO 11901 - 4 39D 838 (VW)	VDI 3003 Blatt 4	B2 4008 (BMW)	075.90.65 (FCA)
-------------------------------	------------------	---------------	-----------------

H 4200

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

**ACTIVE SAFETY**

OSAS



USAS



OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

* F_{1i} =

Isothermal
end force
at 100% Cu



p. 18


** F_{1p} =

Polytrophic
end force
at 100% Cu



 N ₂		 °F 32 176	 °C 0 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 28,27 cm ² 4.382 in ²	SPM ~ 15 ÷ 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit See Tab below								
CODE PHASING OUT from 01/2018	 NEW	Cu		L		L min		F ₀ Initial force		F _{1i} * End force		F _{1p} ** End force		V ₀				
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	2014/68/EU
H 4200 - 025 - C	H 4200 - 025 - D	25	0.98	170	6.69	145	5.71	4240 9532 ± 5%	150 bar 2175 psi	5817	13077	6753	15181	303,0	18.48	5,76	12.70	✓
H 4200 - 038 - C	H 4200 - 038 - D	38	1.50	196	7.72	158	6.22			6236	14019	7407	16652	388,0	23.67	6,12	13.49	✓
H 4200 - 050 - C	H 4200 - 050 - D	50	1.97	220	8.66	170	6.69			6515	14646	7850	17648	467,0	28.49	6,45	14.22	✓
H 4200 - 063 - C	H 4200 - 063 - D	63	2.48	246	9.70	183	7.20			6744	15161	8217	18473	552,0	33.67	6,80	14.99	✓
H 4200 - 075 - C	H 4200 - 075 - D	75	2.95	270	10.63	195	7.68			6908	15530	8484	19073	631,0	38.49	7,13	15.72	✓
H 4200 - 080 - C	H 4200 - 080 - D	80	3.15	280	11.02	200	7.87			6967	15662	8581	19291	663,0	40.44	7,27	16.03	✓
H 4200 - 100 - C	H 4200 - 100 - D	100	3.94	320	12.60	220	8.66			7160	16097	8898	20003	794,0	48.43	7,76	17.11	✓
H 4200 - 125 - C	H 4200 - 125 - D	125	4.92	370	14.57	245	9.65			7336	16491	9188	20656	958,0	58.44	8,45	18.63	✓
H 4200 - 150 - C	H 4200 - 150 - D	150	5.91	420	16.54	270	10.63	7465	16781	9403	21140	1122,0	68.44	9,13	20.13	✓		
H 4200 - 160 - C	H 4200 - 160 - D	160	6.30	440	17.32	280	11.02	+ 20 °C +68 °F	7507	16877	9475	21300	1187,0	72.41	9,40	20.72	✓	
H 4200 - 175 - C	H 4200 - 175 - D	175	6.89	470	18.50	295	11.61		7564	17004	9569	21512	1285,0	78.39	9,82	21.65	✓	
H 4200 - 200 - C	H 4200 - 200 - D	200	7.87	520	20.47	320	12.60		7642	17179	9701	21808	1449,0	88.39	10,50	23.15	✓	
H 4200 - 250 - C	H 4200 - 250 - D	250	9.84	620	24.41	370	14.57		7758	17440	9897	22248	1776,0	108.34	11,87	26.17	✓	
H 4200 - 300 - C	H 4200 - 300 - D	300	11.81	720	28.35	420	16.54		7890	17737	10122	22755	2104,0	128.34	13,24	29.19	✓	

Model (Cu)	Rev.	Maintenance kit
H 4200 (025 ÷ 080)	C	39BMRV04200C
H 4200 (025 ÷ 080)	D	39BMH04200D
H 4200 (100 ÷ 300)	C - D	39BMH04200DH

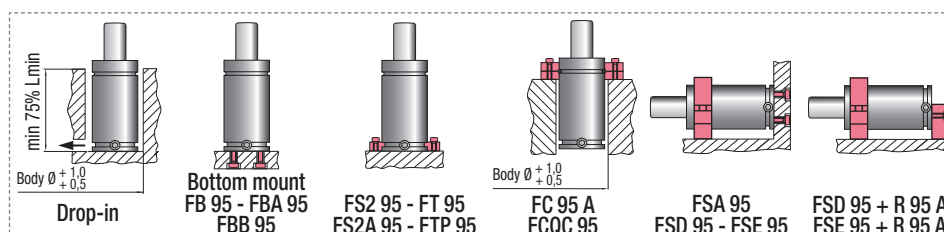**HOW TO ORDER****INSTALLATION GUIDELINE**