

H 6600ISO 11901 - 4
39D 838 (VW)

VDI 3003 Blatt 4

B2 4008 (BMW)

075.90.65 (FCA)



SW

OSAS + OSMOVER STROKE
ACTIVE
SAFETY + OVER
STROKE
MARKER**ACTIVE
SAFETY**

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

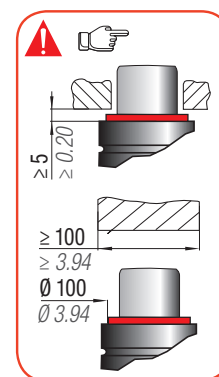

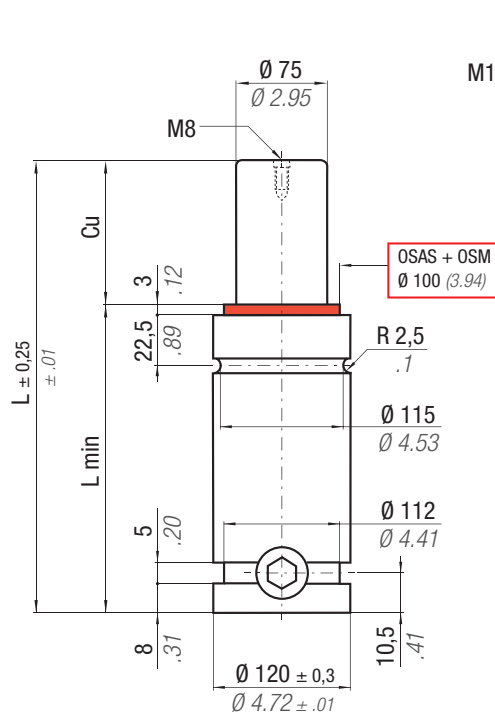
The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

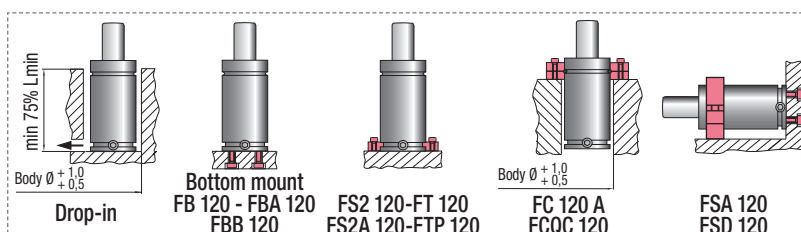
O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu
MANIFOLD* F_{1i} =Isothermal
end force
at 100% Cu** F_{1p} =Polytropic
end force
at 100% Cu

N ₂	$^{\circ}\text{F}$ 32 - 176	$^{\circ}\text{C}$ 0 - 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 44,18 cm ² 6.848 in ²	SPM ~ 15 ÷ 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit See Tab below
----------------	--------------------------------------	------------------------------------	---------------------------	------------------------------	----------------------------	---	--------------------------------	----------------------	----------------------------------

CODE PHASING OUT from 01/2018		NEW		Cu		L		L min		F0 Initial force		F1i * End force		F1p ** End force		Vo				PED 2014/68/EU			
				mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm³	in³	~Kg	~lb				
H 6600 - 025 - C	H 6600 - 025 - D	25	0.98	190	7.48	165	6.50	6630 14904 ± 5%				8601	19336	9806	22045	561,0	34.22	10,35	22.82	✓			
H 6600 - 038 - C	H 6600 - 038 - D	38	1.50	216	8.50	178	7.01					9183	20644	10696	24046	700,0	42.70	10,89	24.01	✓			
H 6600 - 050 - C	H 6600 - 050 - D	50	1.97	240	9.45	190	7.48					9585	21548	11323	25455	828,0	50.51	11,37	25.07	✓			
H 6600 - 063 - C	H 6600 - 063 - D	63	2.48	266	10.47	203	7.99					9924	22310	11857	26656	967,0	58.99	11,93	26.30	✓			
H 6600 - 075 - C	H 6600 - 075 - D	75	2.95	290	11.42	215	8.46					10174	22872	12255	27550	1095,0	66.80	12,39	27.32	✓			
H 6600 - 080 - C	H 6600 - 080 - D	80	3.15	300	11.81	220	8.66					10264	23074	12400	27876	1149,0	70.09	12,60	27.78	✓			
H 6600 - 100 - C	H 6600 - 100 - D	100	3.94	340	13.39	240	9.45					10565	23751	12885	28967	1362,0	83.08	13,30	29.32	✓			
H 6600 - 125 - C	H 6600 - 125 - D	125	4.92	390	15.35	265	10.43					10844	24378	13339	29987	1629,0	99.37	14,33	31.59	✓			
H 6600 - 150 - C	H 6600 - 150 - D	150	5.91	440	17.32	290	11.42					11053	24848	13681	30756	1864,0	113.70	15,35	33.84	✓			
H 6600 - 160 - C	H 6600 - 160 - D	160	6.30	460	18.11	300	11.81					+ 20 °C +68 °F				11123	25005	13975	31417	2003,0	122.18	15,75	34.72
H 6600 - 175 - C	H 6600 - 175 - D	175	6.89	490	19.29	315	12.40	11215	25212	13948	31356					2164,0	132.00	16,36	36.07	✓			
H 6600 - 200 - C	H 6600 - 200 - D	200	7.87	540	21.26	340	13.39	11345	25505	14163	31840					2431,0	148.29	17,38	38.32	✓			
H 6600 - 250 - C	H 6600 - 250 - D	250	9.84	640	25.20	390	15.35	11540	25943	14486	32566					2965,0	180.87	19,42	42.81	✓			
H 6600 - 300 - C	H 6600 - 300 - D	300	11.81	740	29.13	440	17.32	11713	26332	14775	33216					3485,0	212.59	21,57	47.55	✓			

Model (Cu)	Rev.	Maintenance kit
H 6600 (025 ÷ 080)	C	39BMRV06600C
H 6600 (025 ÷ 080)	D	39BMH06600D
H 6600 (100 ÷ 300)	C - D	39BMH06600DH

**HOW TO ORDER****INSTALLATION GUIDELINE**