


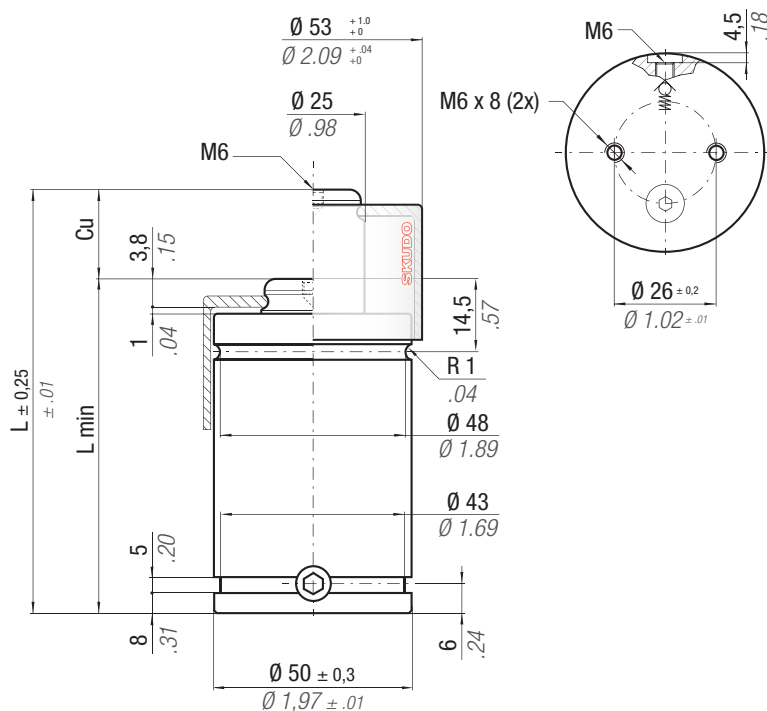

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

easy
MANIFOLD

* $F_{1i} =$

Isothermal
end force
at 100% Cu

** $F_{1p} =$

Polytrophic
end force
at 100% Cu

**ACTIVE
SAFETY**



OSAS



USAS





OPAS



SKUDO

 N2		°F 32 176 °C 0 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 12,57 cm² 1.948 in²	SPM ~ 50 - 100 (at 20°C)	Max Speed 0,8 m/s	Maintenance kit 39BMKE01800B	
CODE PHASING OUT from 08/2012	 NEW	Cu	L	L min	F0 Initial force	F1i * End force	F1p ** End force	Vo		PED 2014/68/EU
		mm inch	mm inch	mm inch	daN lb	daN lb	daN lb	cm³ in³	~Kg ~lb	
KE 1800 - 006 - A	KE 1800 - 006 - B	6 0.24	66 2.60	60 2.36	1885 4238 ± 5%	3046 6847	3731 8388	23,0 1.40	0,63 1.39	✓
KE 1800 - 010 - A	KE 1800 - 010 - B	10 0.39	80 3.15	70 2.76		3125 7026	3860 8678	36,0 2.20	0,69 1.52	✓
KE 1800 - 016 - A	KE 1800 - 016 - B	16 0.63	106 4.17	90 3.54		2979 6698	3623 8145	63,0 3.84	0,81 1.79	✓
KE 1800 - 025 - A	KE 1800 - 025 - B	25 0.98	135 5.31	110 4.33	150 bar 2175psi	3133 7044	3874 8709	90,0 5.49	0,94 2.07	✓
KE 1800 - 032 - A	KE 1800 - 032 - B	32 1.26	162 6.38	130 5.12		3106 6983	3830 8610	117,0 7.14	1,06 2.34	✓
KE 1800 - 040 - A	KE 1800 - 040 - B	40 1.57	190 7.48	150 5.91		3135 7049	3877 8716	145,0 8.85	1,19 2.62	✓
KE 1800 - 050 - A	KE 1800 - 050 - B	50 1.97	220 8.66	170 6.69	+ 20 °C +68 °F	3236 7275	4043 9089	172,0 10.49	1,31 2.89	✓
-	 KE 1800 - 065 - B	65 2.56	271 10.67	206 8.11		3262 7333	4086 9186	221,0 13.48	1,53 3.37	✓

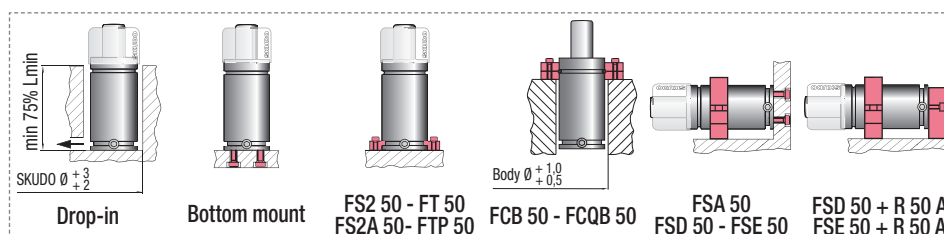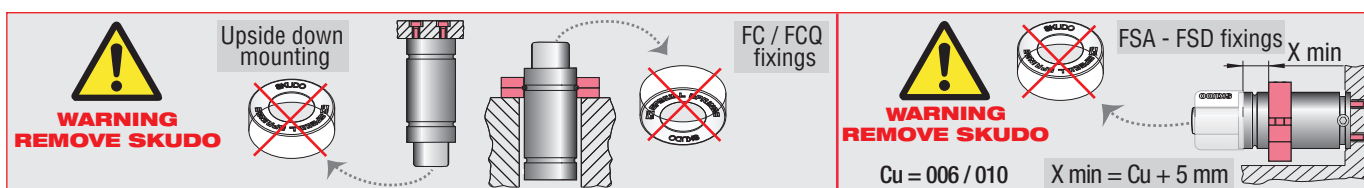

HOW TO ORDER



INSTALLATION GUIDELINE

