

KE 3000

ACTIVE
SAFETY

OSAS



USAS



OPAS



SKUDO

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu
MANIFOLD

p. 241

* $F_{1i} =$


Isothermal
end force
at 100% Cu





p. 18

** $F_{1p} =$

Polytropic
end force
at 100% Cu

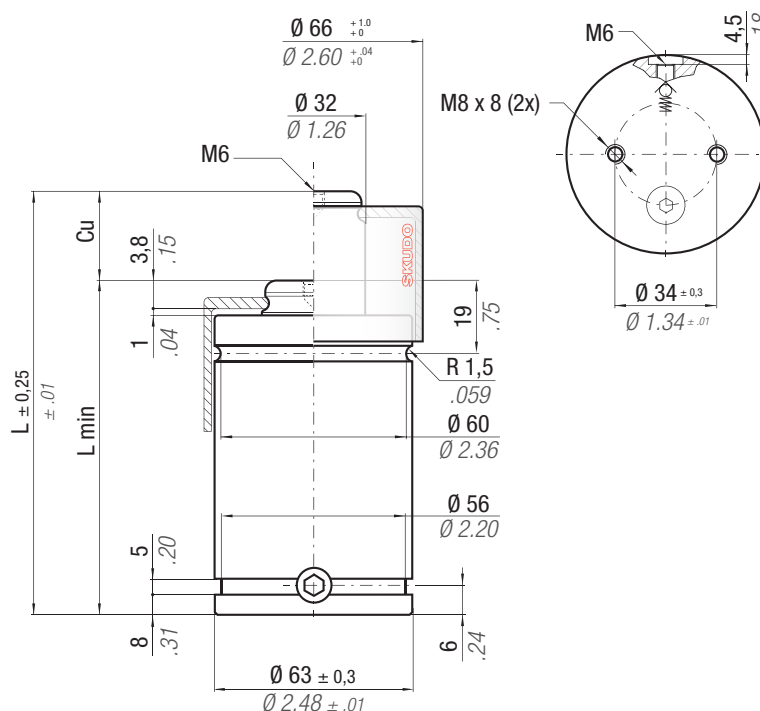

 N2		°F 32 176 °C 0 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 19,63 cm² 3.043 in²	SPM ~ 80 - 100 (at 20°C)	Max Speed 0,8 m/s	Maintenance kit 39BMKE03000B								
CODE PHASING OUT from 08/2012	 NEW	Cu mm inch		L mm inch		L min mm inch		F0 Initial force daN lb		F1i * End force daN lb		F1p ** End force daN lb		Vo cm³ in³		 ~Kg ~lb	 2014/68/EU
KE 3000 - 010 - A	KE 3000 - 010 - B	10	0.39	85	3.35	75	2.95	2945 6620 ± 5%	5084 11429	6363 14305	53,0 3.23	1,23 2.71	✓				
KE 3000 - 016 - A	KE 3000 - 016 - B	16	0.63	103	4.06	87	3.43							5362 12053	6829 15352	79,0 4.82	1,36 3.00
KE 3000 - 025 - A	KE 3000 - 025 - B	25	0.98	130	5.12	105	4.13	150 bar 2175psi	5566 12512	7176 16132	119,0 7.26	1,55 3.42	✓				
KE 3000 - 032 - A	KE 3000 - 032 - B	32	1.26	150	5.91	118	4.65							5721 12861	7443 16733	147,0 8.97	1,69 3.73
KE 3000 - 040 - A	KE 3000 - 040 - B	40	1.57	175	6.89	135	5.31	+ 20 °C +68 °F	5722 12863	7445 16737	184,0 11.22	1,86 4.10	✓				
KE 3000 - 050 - A	KE 3000 - 050 - B	50	1.97	205	8.07	155	6.10							5778 12989	7542 16955	227,0 13.85	2,07 4.56
-	 KE 3000 - 065 - B	65	2.56	256	10.08	191	7.52		5630 12657	7287 16382	304,0 18.54	2,44 5.38	✓				

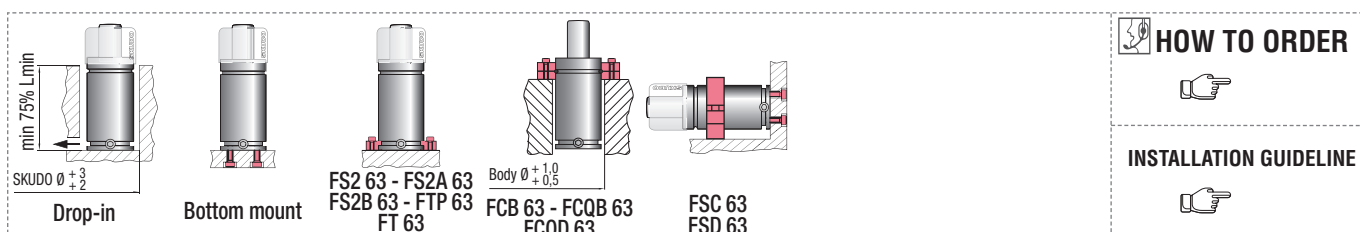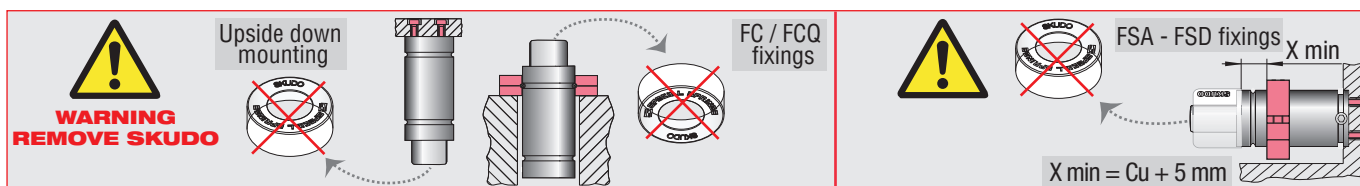

HOW TO ORDER



INSTALLATION GUIDELINE

