


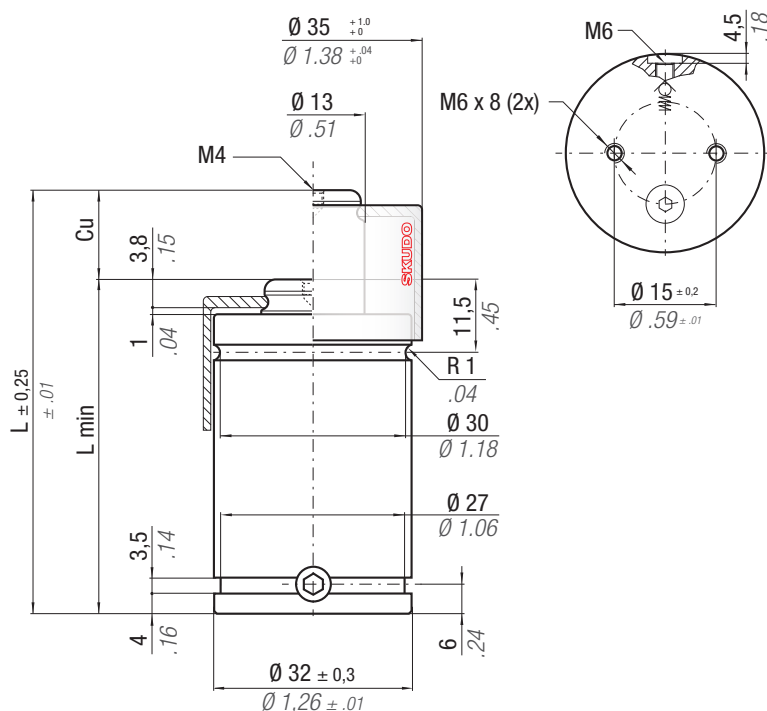

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Code wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock



* $F1_i =$

**Isothermal
end force
at 100% Cu** 

**** F1_p =**

 Polytrophic
end force
at 100% Cu

ACTIVE SAFETY



OSAS



USAS





OPAS



SKUDO

 N2		°F 32 176 °C 0 80	ΔP ± 0,33 %/°C	P max 150 bar <i>2175 psi</i>	P min 20 bar <i>290 psi</i>	S 4,91 cm² <i>0.761 in²</i>	SPM ~ 50 - 100 (at 20°C)	Max Speed 0,8 m/s	Maintenance kit 39BMKE00750B									
CODE PHASING OUT from 08/2012	 NEW	Cu mm <i>inch</i>		L mm <i>inch</i>		L min mm <i>inch</i>		F0 Initial force daN <i>lb</i>		F1_i * End force daN <i>lb</i>		F1_p ** End force daN <i>lb</i>		Vo cm³ <i>in³</i>		 ~Kg ~ <i>lb</i>		 2014/68/EU
KE 750 - 006 - A	KE 750 - 006 - B	6	0.24	63	2.48	57	2.24	740 1664 ± 5%		1207 2714		1486 3341		9,0	0.55	0,23	0.51	✓
KE 750 - 010 - A	KE 750 - 010 - B	10	0.39	75	2.95	65	2.56			1310 2945		1656 3723		13,0	0.79	0,25	0.55	✓
KE 750 - 016 - A	KE 750 - 016 - B	16	0.63	93	3.66	77	3.03	150 bar 2175psi		1390 3125		1792 4029		19,0	1.16	0,29	0.64	✓
KE 750 - 025 - A	KE 750 - 025 - B	25	0.98	120	4.72	95	3.74			1450 3259		1895 4260		28,0	1.71	0,33	0.73	✓
KE 750 - 032 - A	KE 750 - 032 - B	32	1.26	140	5.51	108	4.25	+ 20 °C +68 °F		1496 3363		1975 4440		35,0	2.14	0,37	0.82	✓
KE 750 - 040 - A	KE 750 - 040 - B	40	1.57	165	6.50	125	4.92			1496 3363		1975 4440		44,0	2.68	0,42	0.92	✓
KE 750 - 050 - A	KE 750 - 050 - B	50	1.97	195	7.68	145	5.71			1513 3400		2004 4505		54,0	3.29	0.47	1.04	✓

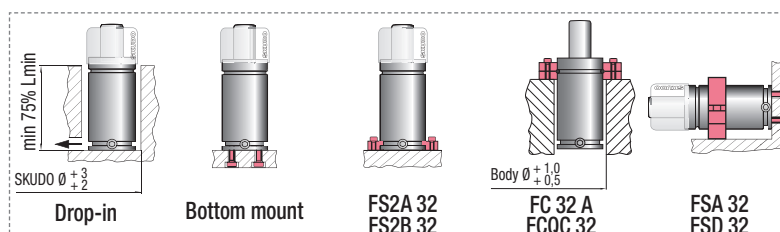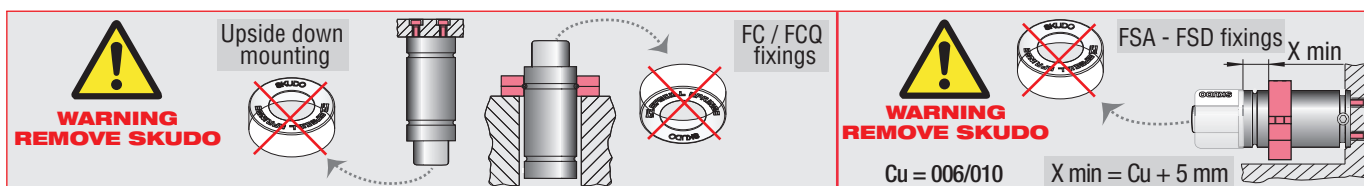

HOW TO ORDER



INSTALLATION GUIDELINE

