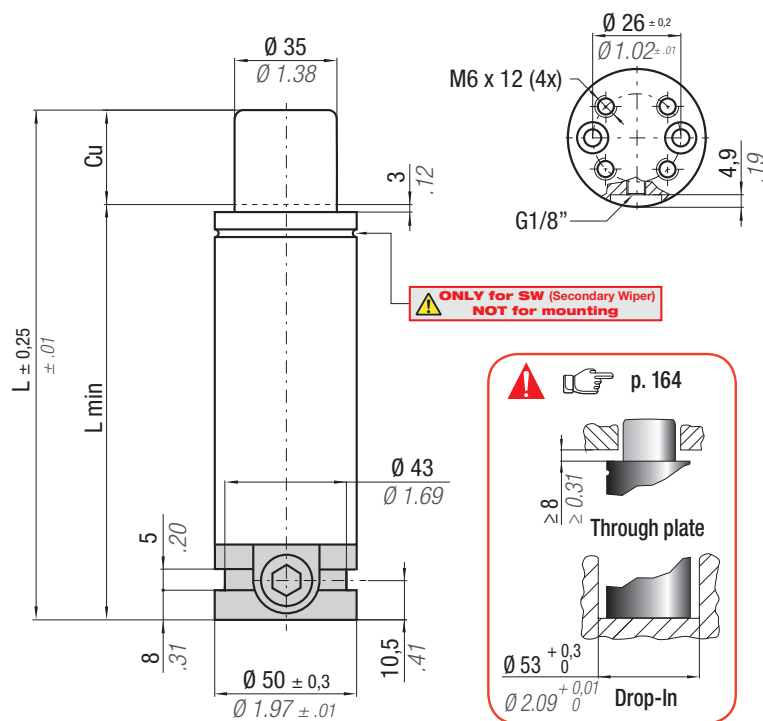


ML 1800 N
linkable G1/8"

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

* $F_{1i} =$

Isothermal
end force
at 100% Cu



p. 18

** $F_{1p} =$

Polytropic
end force
at 100% Cu



SW

**ACTIVE
SAFETY**

OSAS



USAS



OPAS

 N2		°F 32 176 °C 0 80	ΔP ± 0,33 %/°C	P max 200 bar 2900 psi	P min 20 bar 290 psi	S 9,62 cm² 1.491 in²	SPM ~ 40 - 80 (at 20°C)	Max Speed 1,6 m/s	Maintenance kit 39BMML01800C									
CODE PHASING OUT from 05/2019	 NEW	Cu		L	L min	F0 Initial force		F1i * End force		F1p ** End force		Vo						
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm³	in³	~Kg	~lb	2014/68/EU
ML1800-015-C-N	ML1800-015-D-N	15	0.59	115	4.53	100	3.94	1925	4327	2818	6334	3200	7194	57,0	3.48	1,03	2.27	✓
ML1800-025-C-N	ML1800-025-D-N	25	0.98	135	5.31	110	4.33	± 5%		3182	7154	3706	8331	75,0	4.58	1,12	2.47	✓
ML1800-038-C-N	ML1800-038-D-N	38	1.50	170	6.69	132	5.20	200 bar 2900 psi		3257	7321	3811	8567	111,0	6.77	1,28	2.82	✓
ML1800-050-C-N	ML1800-050-D-N	50	1.97	195	7.68	145	5.71			3451	7758	4087	9188	134,0	8.17	1,39	3.06	✓
ML1800-063-C-N	ML1800-063-D-N	63	2.48	225	8.86	162	6.38			3546	7972	4224	9496	163,0	9.94	1,53	3.37	✓
ML1800-080-C-N	ML1800-080-D-N	80	3.15	265	10.43	185	7.28	+20 °C +68 °F		3619	8136	4329	9732	201,0	12.26	1.71	3.77	✓

SERVICE BOX

code: 39SKML01800A



Seal (1x)



Washer (4x)




Screw (2x)



Instructions



Sostituire ogni 1.000.000 di cicli. Remplacez à chaque million de cycles.
Replace every 1 million cycles. Reemplazar cada 1 millón de ciclos.
Nach 1 Mio. Hübe austauschen. Substituir a cada 1 milhão de ciclos.

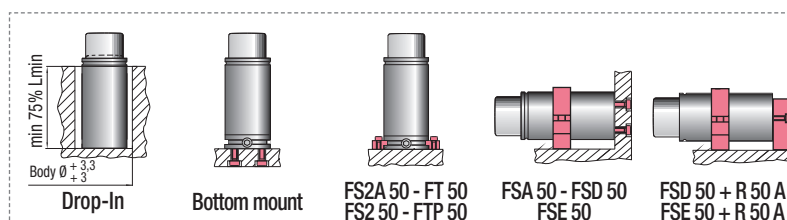**HOW TO ORDER****INSTALLATION GUIDELINE**