

M 90 TEM
threaded

W-DX35-80-191 (Ford)

ACTIVE SAFETY



OSAS



USAS



OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio - The new code will be supplied only when the old will be out of stock - Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist - Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé - El nuevo código será suministrado sólo cuando el viejo está fuera de stock - O novo código irá ser fornecido apenas quando o antigo esgotar stock

* $F1_i =$

Isothermal
end force
at 100% Cu

p. 18

p. 18



**** F1_n =**

Polytrophic
end force
at 100% Cu

Collegabile con tubi - Linkable with hoses
Anschlussfähig mit Leitungen
Connectable avec tubes - Connectable con tubos
Acompláveis com tubos

Micro 32°

Force color code	P		Fo	
	bar	psi	Initial force $\pm 5\%$ at $+20^{\circ}\text{C}$ $+68^{\circ}\text{F}$	
			daN	lb
OR	10	145	5	11
PR	20	290	10	22
GR	60	870	30	67
BU	100	1450	50	112
RD	140	2030	70	157
YW	180	2610	90	202
BK	10-180	145-2610	5-90	11-202

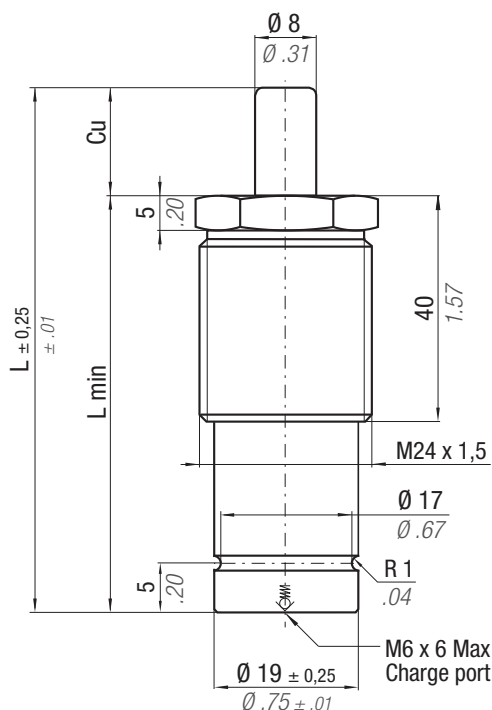


Senza riserva corsa
Without reserve of stroke
Ohne Hubreserve
Sans course de réserve
Sin margen de Carrera
Sem reserva de curso



NON superare 90% Cu
DO NOT exceed 90% Cu
NICHT überschreiten die 90% Cu
NE PAS dépasser 90% Cu
NO superar el 90% Cu
NÃO se excedam os 90% Cu

 N₂	 °F 32 176 °C 0 80	ΔP ± 0,33 %/°C	P max 180 bar <i>2610 psi</i>	P min 10 bar <i>145 psi</i>	S 0,50 cm ² <i>0.078 in²</i>	SPM ~ 100 - 150 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit Disposable
--	--	--------------------------	--	--	---	--	-----------------------------	--------------------------------------

CODE		Cu		L		L min		F _{1i} *		F _{1p} **		Vo				
PHASING OUT from 05/2019	NEW	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	
M90-007-A-...-TEM	M90-007-B-...-TEM	7	0.28	56	2.20	49	1.93	1,21 x F0		1,39 x F0		-	-	0,07	0.15	✓
M90-010-A-...-TEM	M90-010-B-...-TEM	10	0.39	62	2.44	52	2.05	1,25 x F0		1,44 x F0		-	-	0,07	0.15	✓
M90-013-A-...-TEM	M90-013-B-...-TEM	12,7	0.50	67,4	2.65	54,7	2.15	1,27 x F0		1,48 x F0		-	-	0,08	0.18	✓
M90-015-A-...-TEM	M90-015-B-...-TEM	15	0.59	72	2.83	57	2.24	1,28 x F0		1,5 x F0		-	-	0,08	0.18	✓
M90-025-A-...-TEM	M90-025-B-...-TEM	25	0.98	92	3.62	67	2.64	1,32 x F0		1,57 x F0		-	-	0,09	0.20	✓
M90-038-A-...-TEM	M90-038-B-...-TEM	38,1	1.50	118,2	4.65	80,1	3.15	1,35 x F0		1,6 x F0		-	-	0,11	0.24	✓
M90-050-A-...-TEM	M90-050-B-...-TEM	50	1.97	142	5.59	92	3.62	1,36 x F0		1,62 x F0		-	-	0,12	0.26	✓
M90-063-A-...-TEM	M90-063-B-...-TEM	63,5	2.50	172	6.77	108,5	4.27	1,36 x F0		1,62 x F0		-	-	0,14	0.31	✓
M90-080-A-...-TEM	M90-080-B-...-TEM	80	3.15	205	8.07	125	4.92	1,37 x F0		1,64 x F0		-	-	0,15	0.33	✓
M90-100-A-...-TEM	M90-100-B-...-TEM	100	3.94	245	9.65	145	5.71	1,37 x F0		1,65 x F0		-	-	0,17	0.37	✓
M90-125-A-...-TEM	M90-125-B-...-TEM	125	4.92	295	11.61	170	6.69	1,38 x F0		1.66 x F0		-	-	0.20	0.44	✓



DM 24



HOW TO ORDER



INSTALLATION GUIDELINE

