


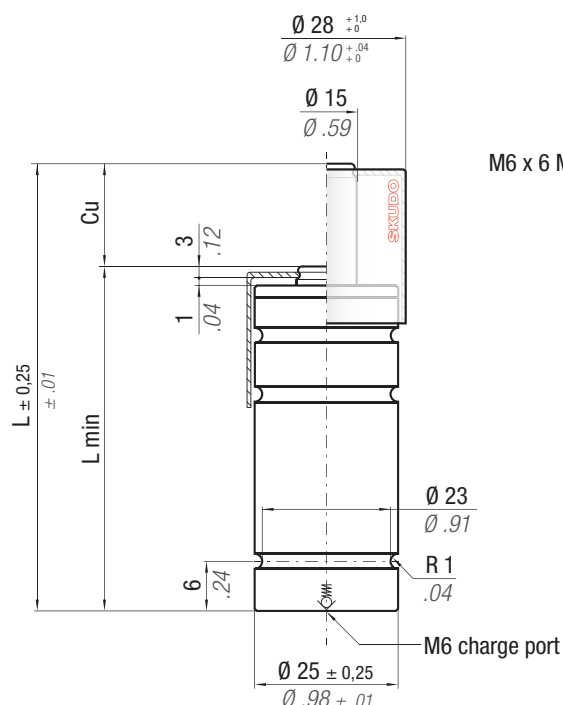

M6 x 6 Max

M6 charge port

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

* $F_{1i} =$



Isothermal
end force
at 100% Cu



p. 18

** $F_{1p} =$

Polytrophic
end force
at 100% Cu



ACTIVE SAFETY



OSAS



USAS





OPAS



SKUDO

 N ₂		 °F 32 176	 °C 0 80	ΔP ± 0,33 %/°C	P max 180 bar 2610 psi	P min 20 bar 290 psi	S 1,77 cm ² 0.27 in ²	SPM ~ 40 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit Disposable								
CODE PHASING OUT from 01/2020	 NEW	Cu		L		L min		F ₀ Initial force	F _{1i} * End force	F _{1p} ** End force	V ₀							
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	
RS 320 - 007 - B	RS 320 - 007 - C	7	0.28	50	1.97	43	1.69	320 ± 5%	719	424	953	474	1066	6,0	0.37	0,10	0.23	✓
RS 320 - 010 - B	RS 320 - 010 - C	10	0.39	56	2.20	46	1.81			448	1007	508	1142	7,0	0.43	0,11	0.24	✓
RS 320 - 012 - B	RS 320 - 012 - C	12	0.47	60	2.36	48	1.89			461	1036	526	1182	8,0	0.49	0,11	0.25	✓
RS 320 - 016 - B	RS 320 - 016 - C	16	0.63	68	2.68	52	2.05			481	1081	554	1245	10,0	0.61	0,12	0.26	✓
RS 320 - 022 - B	RS 320 - 022 - C	22	0.87	80	3.15	58	2.28			501	1126	584	1313	13,0	0.79	0,13	0.29	✓
RS 320 - 029 - B	RS 320 - 029 - C	29	1.14	94	3.70	65	2.56	180 bar 2610psi	+ 20 °C +68 °F	518	1165	608	1367	16,0	0.98	0,14	0.31	✓
RS 320 - 035 - B	RS 320 - 035 - C	35	1.38	106	4.17	71	2.80			528	1187	623	1401	19,0	1.16	0,15	0.33	✓
RS 320 - 047 - B	RS 320 - 047 - C	47	1.85	130	5.12	83	3.27			542	1218	643	1446	24,0	1.46	0,17	0.38	✓
RS 320 - 060 - B	RS 320 - 060 - C	60	2.36	156	6.14	96	3.78			551	1239	658	1479	30,0	1.83	0,19	0.43	✓
RS 320 - 072 - B	RS 320 - 072 - C	72	2.83	185	7.28	113	4.45			550	1236	656	1475	36,0	2.20	0,22	0.48	✓
RS 320 - 077 - B	RS 320 - 077 - C	77	3.03	195	7.68	118	4.65			553	1243	660	1484	38,0	2.32	0,23	0.50	✓
RS 320 - 097 - B	RS 320 - 097 - C	97	3.82	235	9.25	138	5.43			560	1259	672	1511	47,0	2.87	0,26	0.57	✓
RS 320 - 122 - B	RS 320 - 122 - C	122	4.80	285	11.22	163	6.42			567	1275	681	1531	59,0	3.60	0,30	0.66	✓

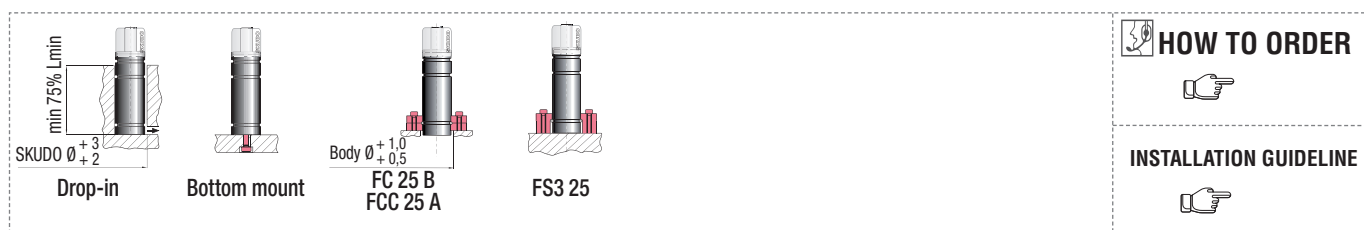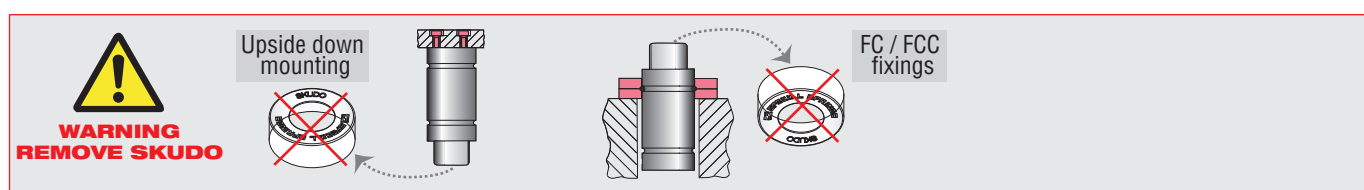

HOW TO ORDER



INSTALLATION GUIDELINE

