

RT 750

PG24D (Mazda)

K 32 R (Nissan)

EM24.54.700 (Renault)



SW

OSAS + OSM

OVER STROKE
ACTIVE
SAFETY + OVER
STROKE
MARKERACTIVE
SAFETY* $F_{1i} =$ Isothermal
end force
at 100% Cu

p. 18

** $F_{1p} =$ Polytrophic
end force
at 100% Cu




OSAS




USAS



OPAS

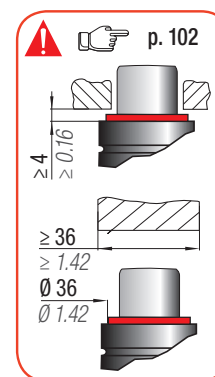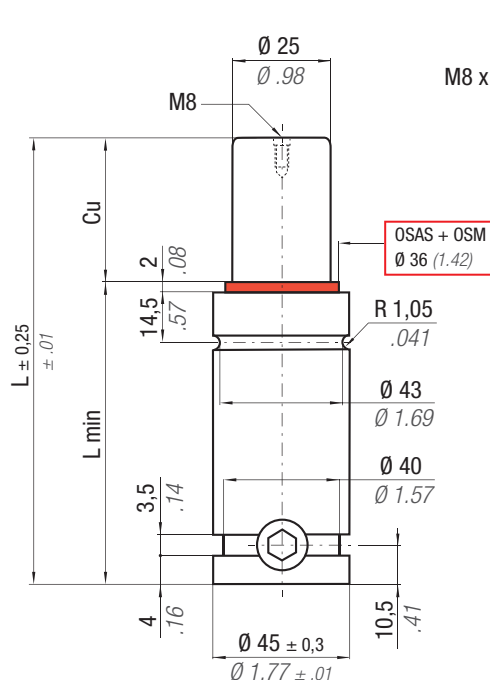

 N2		 °F 32 -176	 °C 0 -80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4,91 cm² 0.761 in²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV00750C								
CODE		Cu		L		L min		Fo		F1i *		F1p **		Vo				
		mm	inch	mm	inch	mm	inch	Initial force daN	lb	End force daN	lb	End force daN	lb	cm³	in³			~Kg
RT 750 - 010 - A		10	0.39	67	2.64	57	2.24	740 ± 5%	1664	1018	2288	1184	2662	21,0	1.28	0,50	1.10	✓
RT 750 - 013 - A		13	0.51	73	2.87	60	2.36			1056	2373	1243	2794	24,0	1.46	0,52	1.15	✓
RT 750 - 016 - A		16	0.63	79	3.11	63	2.48			1085	2439	1289	2898	28,0	1.71	0,54	1.19	✓
RT 750 - 019 - A		19	0.75	85	3.35	66	2.60			1108	2492	1326	2981	32,0	1.95	0,56	1.23	✓
RT 750 - 025 - A		25	0.98	97	3.82	72	2.83			1143	2570	1382	3107	40,0	2.44	0,60	1.32	✓
RT 750 - 032 - A		32	1.26	111	4.37	79	3.11			1172	2634	1428	3210	49,0	2.99	0,64	1.41	✓
RT 750 - 038 - A		38	1.50	123	4.84	85	3.35			1189	2674	1457	3275	56,0	3.42	0,68	1.50	✓
RT 750 - 050 - A		50	1.97	147	5.79	97	3.82			1214	2730	1497	3365	72,0	4.39	0,76	1.68	✓
RT 750 - 063 - A		63	2.48	173	6.81	110	4.33			1232	2770	1527	3433	88,0	5.37	0,84	1.85	✓
RT 750 - 075 - A		75	2.95	197	7.76	122	4.80			1244	2796	1546	3476	103,0	6.28	0,92	2.03	✓
RT 750 - 080 - A		80	3.15	207	8.15	127	5.00	+ 20 °C +68 °F		1248	2805	1552	3489	110,0	6.71	0,95	2.09	✓
RT 750 - 100 - A		100	3.94	247	9.72	147	5.79			1260	2832	1573	3536	135,0	8.24	1,08	2.38	✓
RT 750 - 125 - A		125	4.92	297	11.69	172	6.77			1270	2855	1589	3572	167,0	10.19	1.24	2.73	✓

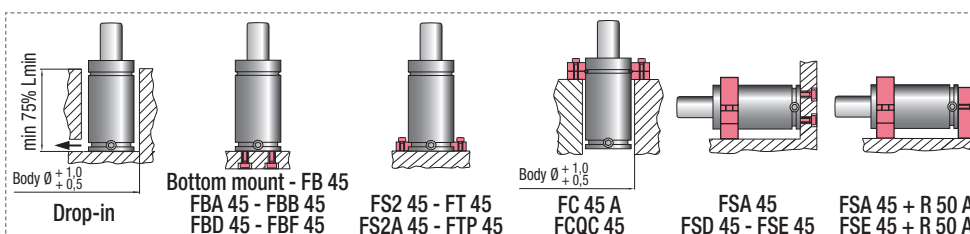

HOW TO ORDER



INSTALLATION GUIDELINE

