

RV 1200



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY

easU MANIFOLD p. 241



* $F_{1i} =$

Isothermal end force at 100% Cu p. 18

** $F_{1p} =$




Polytropic end force at 100% Cu



USAS




OPAS

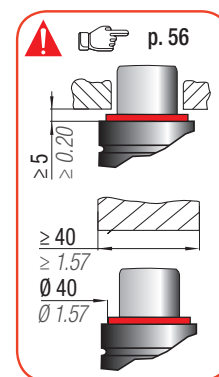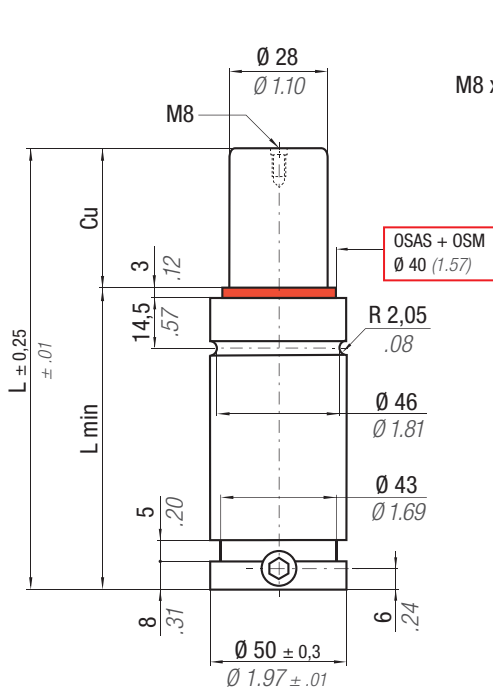

p. 56

	°F 32 176	°C 0 80	ΔP ± 0,33 %/°C	P max 170 bar 2465 psi	P min 20 bar 290 psi	S 6,15 cm ² 0,953 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV01000C							
CODE	Cu		L		L min		F0	F _{1i} *		F _{1p} **		V0		PED 2014/68/EU		
	mm	inch	mm	inch	mm	inch	Initial force daN lb	End force * daN lb	End force ** daN lb	cm ³	in ³	~Kg	~lb	✓	✓	
RV 1200 - 010 - A	10	0.39	58	2.28	48	1.89	1060 ± 5% 2383	1494	3359	1717	3859	25,0	1.53	0,49	1.08	✓
RV 1200 - 013 - A	13	0.51	64	2.52	51	2.01		1553	3490	1802	4052	30,0	1.83	0,51	1.12	✓
RV 1200 - 016 - A	16	0.63	70	2.76	54	2.13		1597	3591	1869	4202	34,0	2.07	0,54	1.19	✓
RV 1200 - 019 - A	19	0.75	76	2.99	57	2.24		1633	3671	1922	4321	39,0	2.38	0,56	1.23	✓
RV 1200 - 025 - A	25	0.98	88	3.46	63	2.48		1685	3789	2001	4500	48,0	2.93	0,61	1.34	✓
RV 1200 - 032 - A	32	1.26	102	4.02	70	2.76		1728	3884	2066	4644	59,0	3.60	0,67	1.48	✓
RV 1200 - 038 - A	38	1.50	114	4.49	76	2.99		1754	3943	2106	4735	69,0	4.21	0,72	1.59	✓
RV 1200 - 050 - A	50	1.97	138	5.43	88	3.46		1791	4026	2163	4863	88,0	5.37	0,81	1.79	✓
RV 1200 - 063 - A	63	2.48	164	6.46	101	3.98		1817	4085	2204	4954	108,0	6.59	0,92	2.03	✓
RV 1200 - 075 - A	75	2.95	188	7.40	113	4.45		1834	4124	2230	5013	127,0	7.75	1,01	2.23	✓
RV 1200 - 080 - A	80	3.15	198	7.80	118	4.65	1840	4137	2239	5033	135,0	8.24	1,05	2.31	✓	
RV 1200 - 100 - A	100	3.94	238	9.37	138	5.43	1858	4177	2267	5096	166,0	10.13	1,21	2.67	✓	
RV 1200 - 125 - A	125	4.92	288	11.34	163	6.42	1873	4210	2290	5148	205,0	12.51	1,41	3.11	✓	

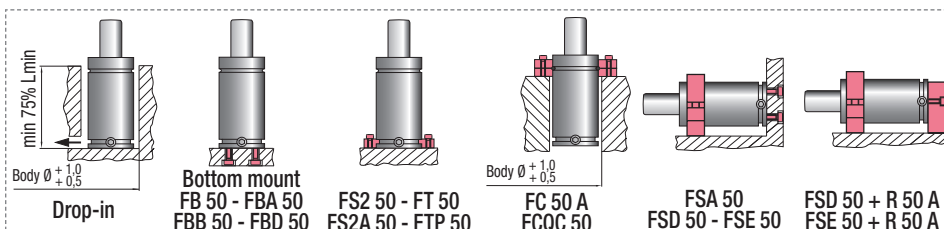

HOW TO ORDER



INSTALLATION GUIDELINE

