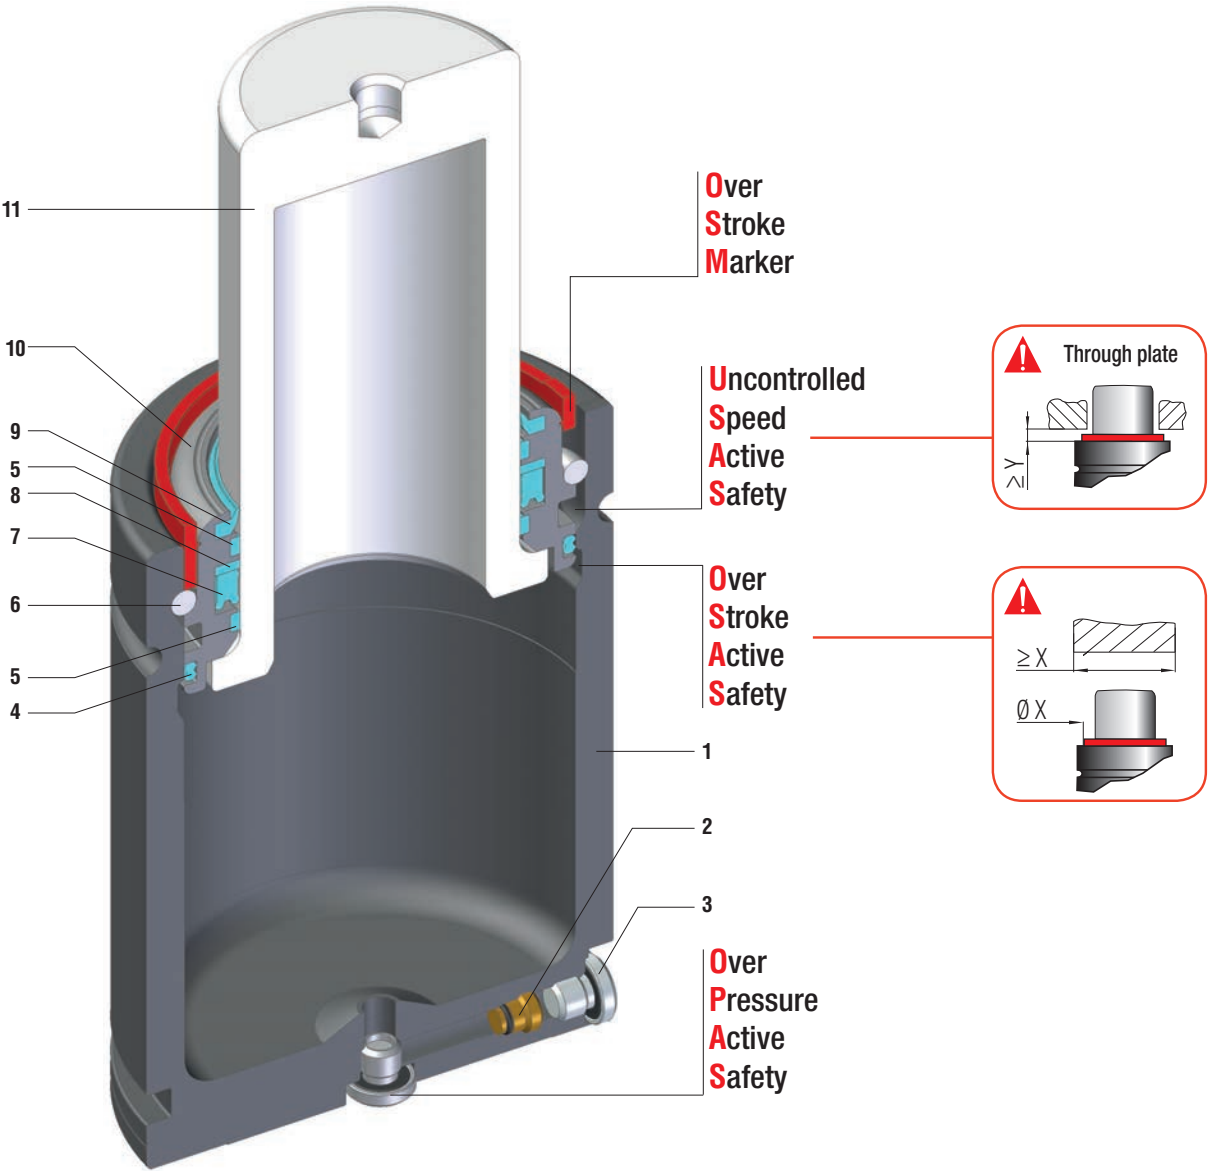


RV SERIES

ISO	VDI	BMW	FCA
Ford	Mazda	MB	Nissan
PSA	Renault	VW	



Minima altezza, massima forza - Minimum height, maximum force - Minimale Höhe, maximale Kraft
Hauteur minimale, force maximale - Mínima altura, máxima fuerza - Altura mínima, força máxima

SEALING	ROD SEAL
DESIGN	BUSH - BODY DESIGN

1	Body	5	Guide ring	9	Rod wiper
2	Valve	6	Retaining ring	10	Bush
3	Plug	7	Rod seal	11	Rod (nitrited superfinished)
4	Dual ring seal	8	Back-up ring		

RANGE CHART

Model	Body Ø		Stroke Cu		Initial force F0						
	mm	inch	mm	inch	daN	lb	OSAS	USAS	OPAS	SKUDO	SW
RV 170	19	0.75	7 - 125	0.28 - 4.92	170	382	✓	✓	✓	-	✓
RV 320	25	0.98	7 - 125	0.28 - 4.92	320	719	✓	✓	✓	-	✓
RV 350	32	1.26	10 - 125	0.39 - 4.92	360	809	✓	✓	✓	-	✓
RV 500	38	1.50	10 - 125	0.39 - 4.92	470	1057	✓	✓	✓	-	✓
RV 750	45	1.77	10 - 125	0.39 - 4.92	740	1664	✓	✓	✓	-	✓
RV 1000	50	1.97	10 - 125	0.39 - 4.92	920	2068	✓	✓	✓	-	✓
RV 1200	50	1.97	10 - 125	0.39 - 4.92	1060	2383	✓	✓	✓	-	✓
RV 1500	63	2.48	10 - 125	0.39 - 4.92	1530	3440	✓	✓	✓	-	✓
RV 2400	75	2.95	10 - 125	0.39 - 4.92	2385	5362	✓	✓	✓	-	✓
RV 4200	95	3.74	16 - 125	0.63 - 4.92	4240	9532	✓	✓	✓	-	✓
RV 6600	120	4.72	16 - 125	0.63 - 4.92	6630	14905	✓	✓	✓	-	✓
RV 9500	150	5.91	19 - 125	0.75 - 4.92	9540	21447	✓	✓	✓	-	✓
RV 12000	150	5.91	19 - 125	0.75 - 4.92	11780	26470	✓	✓	✓	-	✓
RV 20000	195	7.68	19 - 125	0.75 - 4.92	19910	44738	✓	✓	✓	-	✓

✓ Built-in as standard

✓ Optional upon request








HOW TO ORDER

Series _____ Revision code _____

Model **RV2400-050-A-E-W**

Stroke _____ Version _____

Available versions

					
RV 2400-050-A	RV 2400-050-A-W	RV 2400-050-A-N	RV 2400-050-A-N-W	RV 2400-050-A-E	RV 2400-050-A-E-W
Standard code	Add "-W" to standard code	Add "-N" to standard code	Add "-N-W" to standard code	Add "-E" to standard code	Add "-E-W" to standard code
 Self contained	 Self contained	 Linkable	 Linkable	 Easy Manifold	 Easy Manifold
	+  Secondary wiper		+  Secondary wiper		+  Secondary wiper