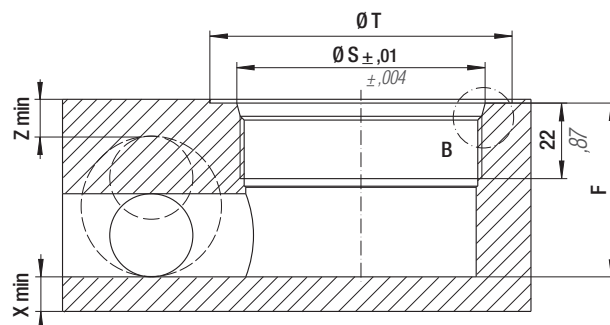
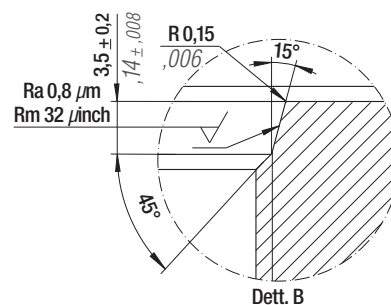
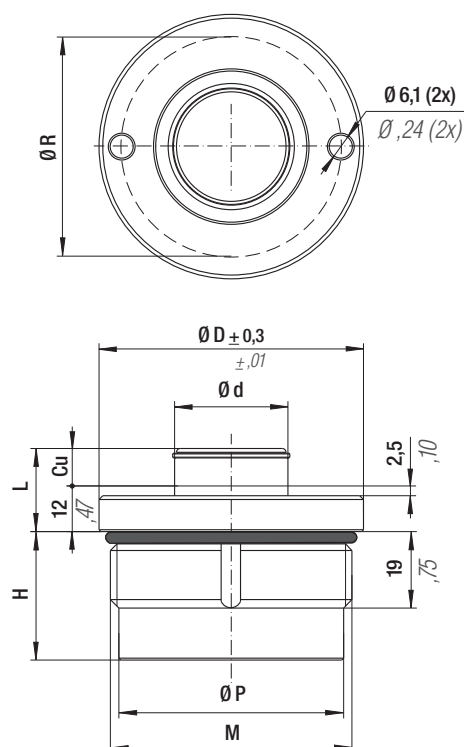


CA 2500

PED
2014/68/EU

Max Speed				 N ₂		P max 110 bar <i>1595 psi</i>		P min 20 bar <i>290 psi</i>		S 22,9 cm ² <i>3,55 in²</i>				Maintenance kit 39BMCA02500A														
0,8 m/s																												
MODEL		F ₀		M	Cu	L		H	Ø D		Ø d		Ø P	Ø R	Ø T		Ø S	F	Xmin		Zmin							
		daN	lb		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch						
CA 2500 - 006 - A		2520	5665	M 64 X 2	6	0.24	18	0.71	30	1.18	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	33	1.30	10	0.39	8	0.31
CA 2500 - 010 - A		2520	5665	M 64 X 2	10	0.39	22	0.87	34	1.34	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	37	1.46	10	0.39	8	0.31
CA 2500 - 015 - A		2520	5665	M 64 X 2	15	0.59	27	1.06	39	1.54	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	42	1.65	10	0.39	8	0.31
CA 2500 - 020 - A		2520	5665	M 64 X 2	20	0.79	32	1.26	44	1.73	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	47	1.85	10	0.39	8	0.31