


CB 2500

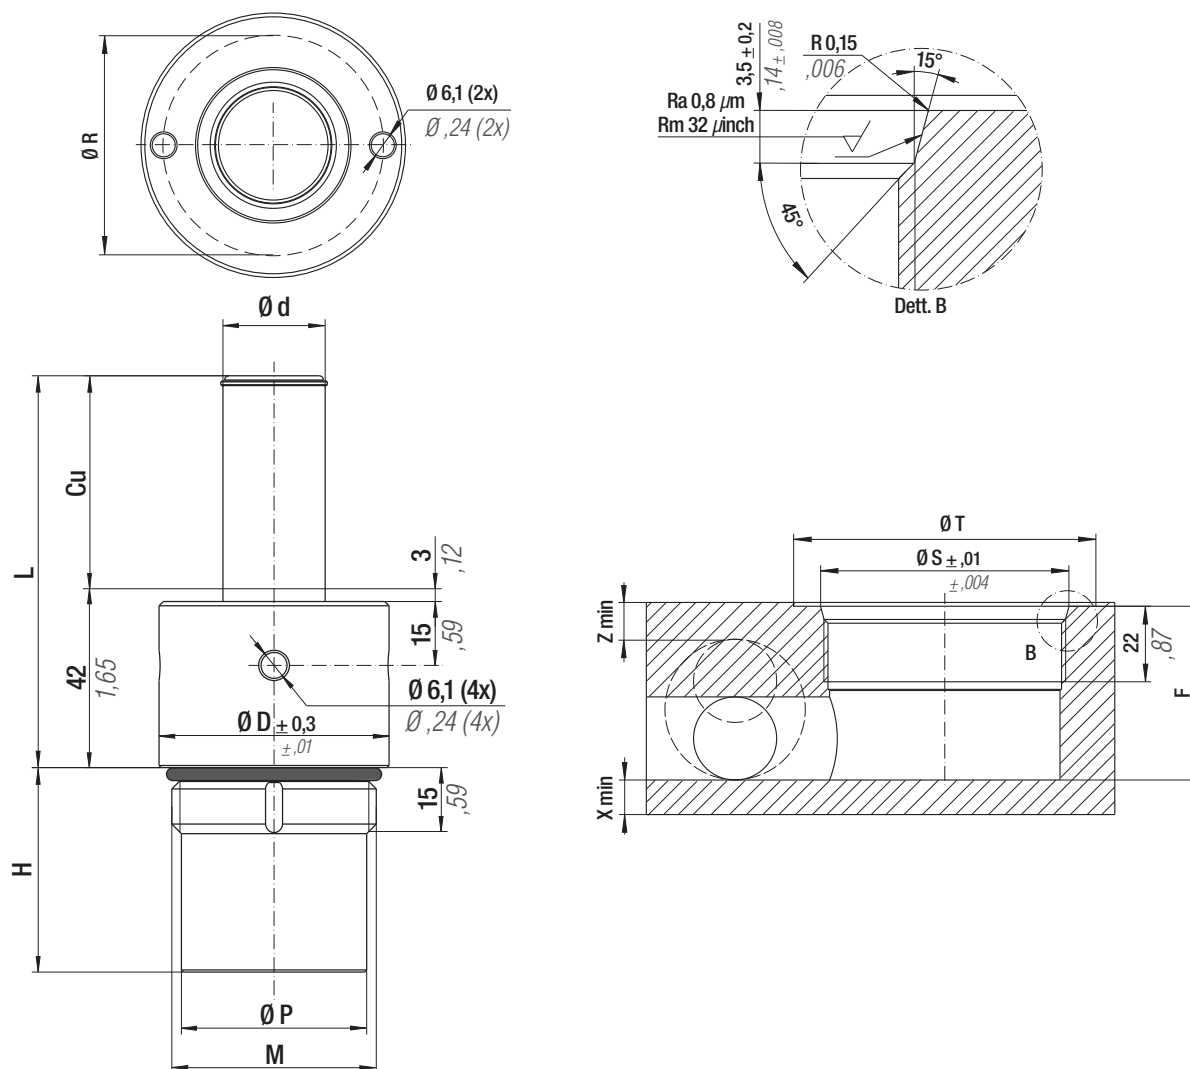

Max Speed		°F 32 0,8 m/s 176		°C 0 80		 N2		P max 110 bar 1595 psi		P min 20 bar 290 psi		S 22,9 cm² 3,55 in²				Maintenance kit 39BMCB02500A															
MODEL				Fo		M		Cu		L		H		Ø D		Ø d		Ø P		Ø R		Ø T		Ø S		F		Xmin		Zmin	
				daN	lb			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
CB 2500 - 025 - A				2520	5665	M 64 X 2		25	0.98	67	2.64	23	0.91	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	26,0	1.02	10	0.39	8	0.31
CB 2500 - 038 - A				2520	5665	M 64 X 2		38	1.5	80	3.15	36	1.42	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	39,0	1.54	10	0.39	8	0.31
CB 2500 - 050 - A				2520	5665	M 64 X 2		50	1.97	92	3.62	48	1.89	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	51,0	2.01	10	0.39	8	0.31
CB 2500 - 075 - A				2520	5665	M 64 X 2		75	2.95	117	4.61	73	2.87	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	76,0	2.99	10	0.39	8	0.31
CB 2500 - 100 - A				2520	5665	M 64 X 2		100	3.94	142	5.59	98	3.86	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	101,0	3.98	10	0.39	8	0.31
CB 2500 - 150 - A				2520	5665	M 64 X 2		150	5.91	192	7.56	148	5.83	70	2.76	30	1.18	59,5	2.34	58	2.28	80	3.15	65,9	2.59	151,0	5.94	10	0.39	8	0.31