
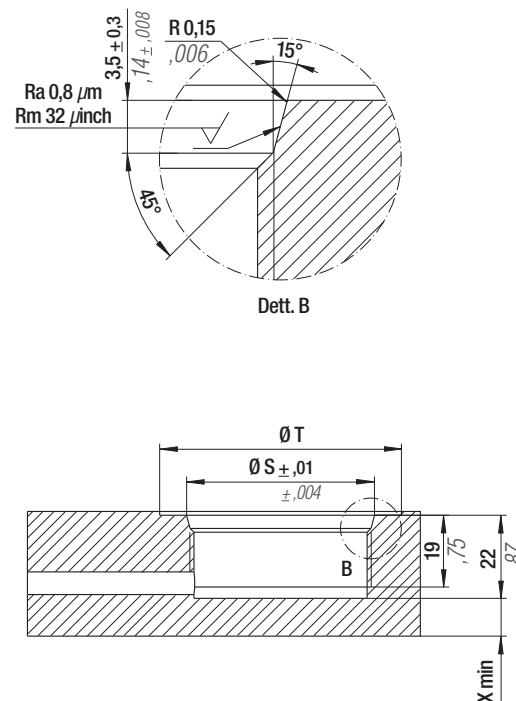


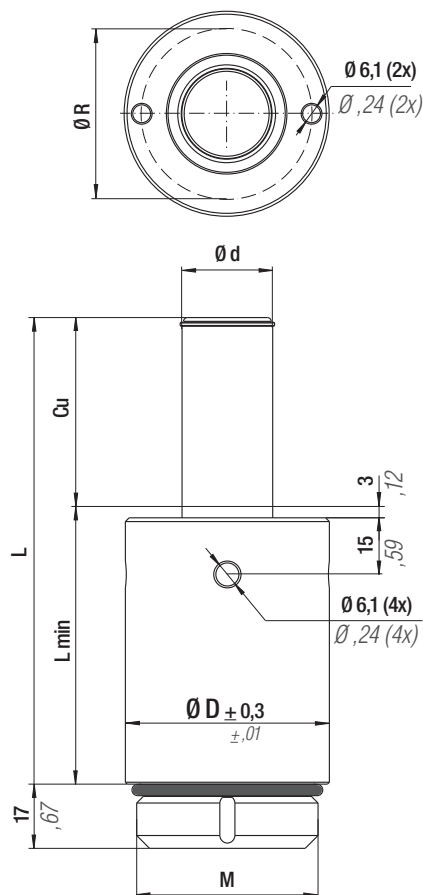

Max Speed 0,8 m/s	°F 32 176		°C 0 80	 N₂	P max 110 bar 1595 psi	P min 20 bar 290 psi	S 22,9 cm ² 3,55 in ²		Maintenance kit 39BMCB02500A												
MODEL 	F₀		M	Cu		L		L min		Ø D		Ø d		Ø R		Ø T		Ø S		Xmin	
	daN	lb		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
CC 2500 - 025 - A	2520	5665	M 64 X 2	25	0.98	73,5	2.89	48,5	1.91	70	2.76	30	1.18	58	2.28	80	3.15	65,9	2.59	10	0.39
CC 2500 - 038 - A	2520	5665	M 64 X 2	38	1.50	99,5	3.92	61,5	2.42	70	2.76	30	1.18	58	2.28	80	3.15	65,9	2.59	10	0.39
CC 2500 - 050 - A	2520	5665	M 64 X 2	50	1.97	123,5	4.86	73,5	2.89	70	2.76	30	1.18	58	2.28	80	3.15	65,9	2.59	10	0.39
CC 2500 - 075 - A	2520	5665	M 64 X 2	75	2.95	173,5	6.83	98,5	3.88	70	2.76	30	1.18	58	2.28	80	3.15	65,9	2.59	10	0.39
CC 2500 - 100 - A	2520	5665	M 64 X 2	100	3.94	223,5	8.80	123,5	4.86	70	2.76	30	1.18	58	2.28	80	3.15	65,9	2.59	10	0.39
CC 2500 - 150 - A	2520	5665	M 64 X 2	150	5.91	323,5	12.74	173,5	6.83	70	2.76	30	1.18	58	2.28	80	3.15	65,9	2.59	10	0.39