
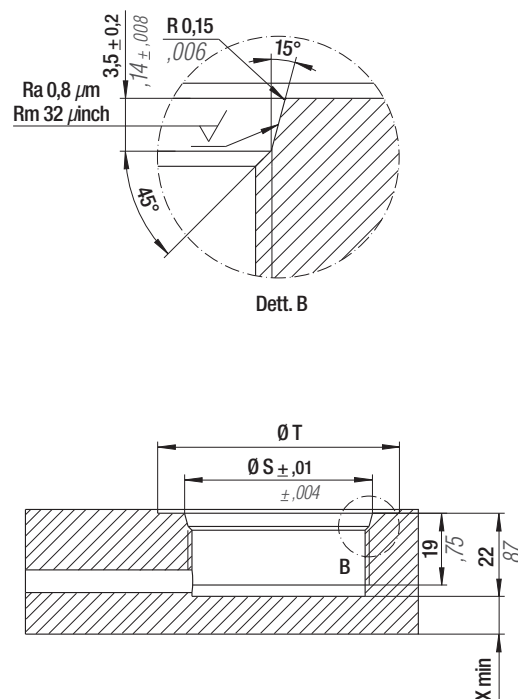


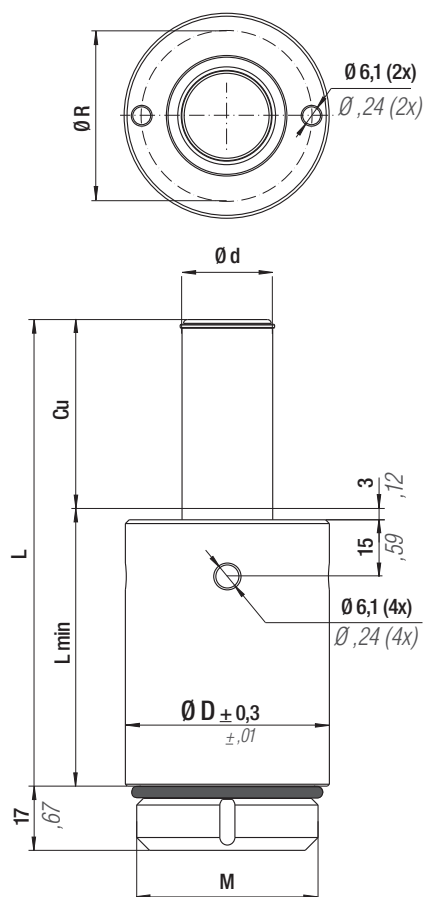

Max Speed	°F		°C	 N₂	P max 110 bar <i>1595 psi</i>	P min 20 bar <i>290 psi</i>	S 4,90 cm ² <i>0,76 in²</i>		Maintenance kit 39BMCC00500A													
	0,8 m/s	32 176	0 80																			
MODEL		F₀		M	Cu		L		L min		Ø D		Ø d		Ø R		Ø T		Ø S		Xmin	
		daN	lb		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		
CC 0500 - 012 - A		540	1214	M 36 X 2	12,5	0.49	45,5	1.79	33,0	1.30	42	1.65	12	0.47	32	1.26	52	2.05	37,9	1.49	6	0.24
CC 0500 - 025 - A		540	1214	M 36 X 2	25	0.98	70,5	2.78	45,5	1.79	42	1.65	12	0.47	32	1.26	52	2.05	37,9	1.49	6	0.24
CC 0500 - 038 - A		540	1214	M 36 X 2	38	1.50	96,5	3.80	58,5	2.30	42	1.65	12	0.47	32	1.26	52	2.05	37,9	1.49	6	0.24
CC 0500 - 050 - A		540	1214	M 36 X 2	50	1.97	120,5	4.74	70,5	2.78	42	1.65	12	0.47	32	1.26	52	2.05	37,9	1.49	6	0.24
CC 0500 - 075 - A		540	1214	M 36 X 2	75	2.95	170,5	6.71	95,5	3.76	42	1.65	12	0.47	32	1.26	52	2.05	37,9	1.49	6	0.24
CC 0500 - 100 - A		540	1214	M 36 X 2	100	3.94	220,5	8.68	120,5	4.74	42	1.65	12	0.47	32	1.26	52	2.05	37,9	1.49	6	0.24