


LINKED SYSTEM SELECTION

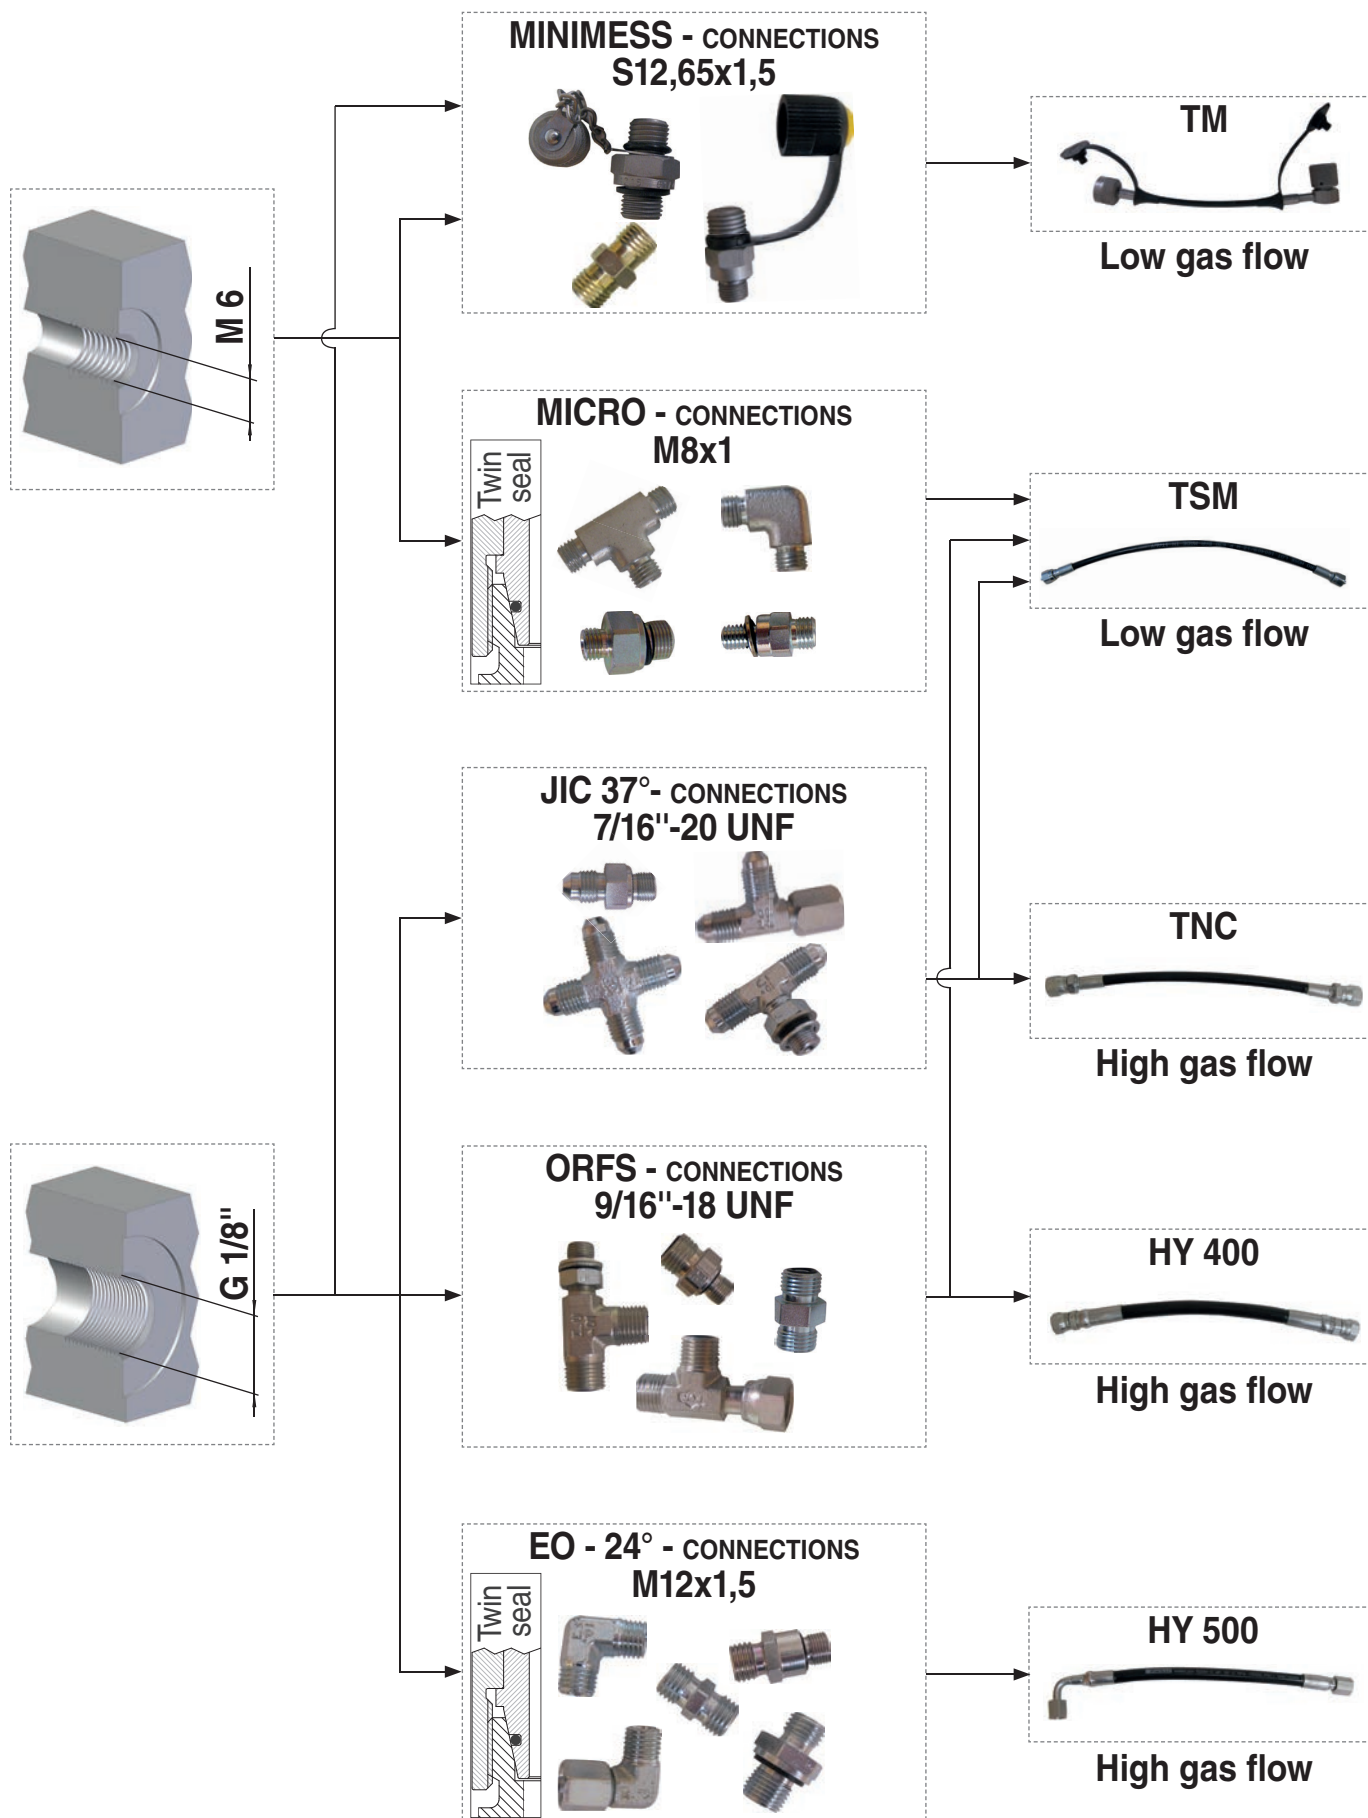

IT

- Pressa trasportabile con pompa pneumatica idraulica
- Idonea per raccordi dritti, 45° e 90°

EN

- Transportable press with hydraulic manual pump
- Suitable for straight, 45° and 90° fittings

DE

- Transportable Presse mit manueller Hydraulikpumpe
- Geeignet für gerade, 45° und 90° Anschlüsse

FR

- Presse transportable avec pompe oléodynamique manuelle
- Utilisable avec raccords droits, 45° et 90°

ES

- Prensa transportable con bomba oleodinámica manual
- Puede ser utilizada con tuberías derechas, 45° y 90°

PT

- Prensa transportável com bomba hidráulica manual
- Pode ser usado com tubos retos, 45° e 90°

code 39PR06**code 58UT022A (included)**

- IT** Utensile rimuovi morsetti con calamita
- EN** Magnet tool to remove pressing jaws
- DE** Magnetwerkzeug für die Entfernung von Pressbacken
- FR** Outil magnétique pour enlever les mâchoires de pressage
- ES** Herramienta magnética para la remoción de las mordazas de prensado
- PT** Ferramenta magnética para remover os mordentes de prensar

code 58UT001A (optional)

- IT** Forbice taglia tubo
- EN** Scissor for hose
- DE** Schlauchschneideschere
- FR** Ciseaux coupe-tube
- ES** Tijeras cortatubos
- PT** Tesouras corta tubos

code 58UT023A (optional)

- IT** Lampada led con magnete
- EN** LED Light with magnet
- DE** LED-Lampe mit Magnet
- FR** Lampe à LED magnétique
- ES** Lámpara LED con imán
- PT** Lâmpada LED com íman

AIR				
7 bar 110 psi	100 TON 110 US TON	380 x 430 x 400 mm 15 x 17 x 16 inch	38 kg 84 lb	-5 ÷ 40 °C 23 ÷ 104 °F

CONNECTIONS	ORFS "TSM" HOSE Ø 5,5 p. 284	Micro 32° - JIC 37° "TSM" HOSE Ø 5,5 p. 272 - 279	Minimess "TM" HOSE Ø 5,1 p. 274	JIC 37° "TNC" HOSE Ø 8,1 p. 272	EO 24° "HY 500" HOSE Ø 11 p. 268	ORFS "HY 400" HOSE Ø 12,7 p. 282
PRESSING JAWS	code 39MTR10 (optional) 	code 39MTR11 (optional) 	code 39MTR12 (optional) 	code 39MTR13 (optional) 		

Ordering example: **39PR06A + 39MTR11** — Pressing jaws for Jic 37° "TNC" HOSE Ø 8,1