




## G229-05

Removable Die Heels, steel and self-lubricating  
Grafitli Çelik Kılavuz Plakalar  
Führungsglaschen, Stahl mit Festschmierstoff



Material :  
CK45 with Non-liquid Lubricant  
HRC 58 ÷ 60

Direction of Motion

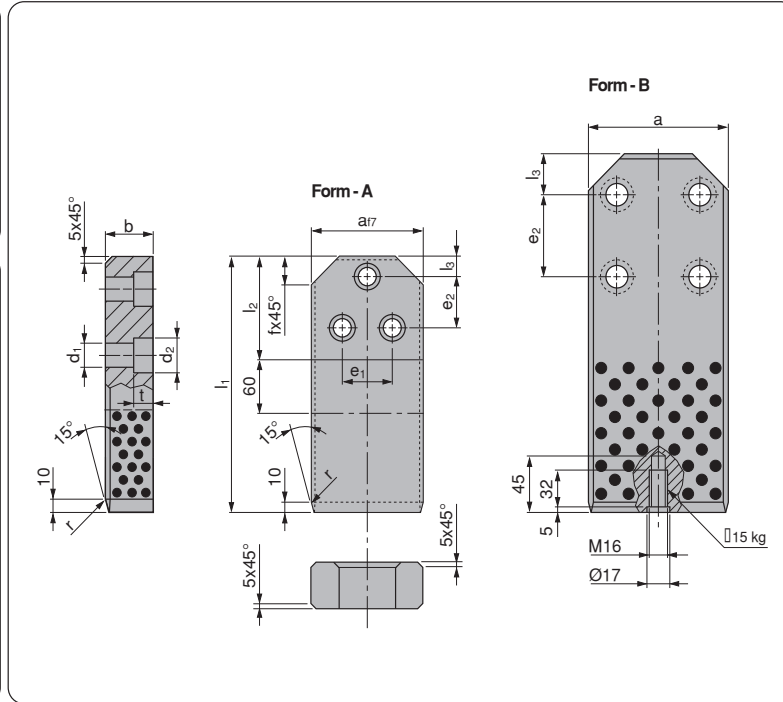

GSB CODE:G229-05

Code	a	b	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	e <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	t	f	r	Form
G229-05-06318036	63	36	180	90	20	50	14	20	16	18	16	A
G229-05-06320036	63	36	200	90	20	50	14	20	16	18	16	A
G229-05-06322436	63	36	224	90	20	50	14	20	16	18	16	A
G229-05-07118036	71	36	180	90	20	50	14	20	16	18	16	A
G229-05-07120036	71	36	200	90	20	50	14	20	16	18	16	A
G229-05-07122436	71	36	224	90	20	50	14	20	16	18	16	A
G229-05-09020036	90	36	200	100	20	50	18	26	21	28	25	A
G229-05-09022436	90	36	224	100	20	50	18	26	21	28	25	A
G229-05-09025036	90	36	250	100	20	50	18	26	21	28	25	A
G229-05-09020045	90	45	200	100	20	50	18	26	21	28	25	A
G229-05-09022445	90	45	224	100	20	50	18	26	21	28	25	A
G229-05-09025045	90	45	250	100	20	50	18	26	21	28	25	A
G229-05-11220045	112	45	200	100	20	50	18	26	21	28	25	A
G229-05-11222445	112	45	224	100	20	50	18	26	21	28	25	A
G229-05-11225045	112	45	250	100	20	50	18	26	21	28	25	A
G229-05-14031545	140	45	315	150	40	80	22	33	25,5	36	31,5	B
G229-05-14040045	140	45	400	150	40	80	22	33	25,5	36	31,5	B
G229-05-14031556	140	56	315	150	40	80	22	33	25,5	36	31,5	B
G229-05-14040056	140	56	400	150	40	80	22	33	25,5	36	31,5	B
G229-05-19031545	190	45	315	150	40	80	22	33	25,5	36	31,5	B
G229-05-19040045	190	45	400	150	40	80	22	33	25,5	36	31,5	B
G229-05-19031556	190	56	315	150	40	80	22	33	25,5	36	31,5	B
G229-05-19040056	190	56	400	150	40	80	22	33	25,5	36	31,5	B
G229-05-24050056	240	56	500	250	40	160	26	40	30,5	36	31,5	B
G229-05-24063056	240	56	630	250	40	160	26	40	30,5	36	31,5	B