





W Series / White

Hyper-Strong Load Springs
Dikdörtgen Kesitli Yüksek Ağırlıklı Yük Yayları
Federn für hyper-starke Spannung

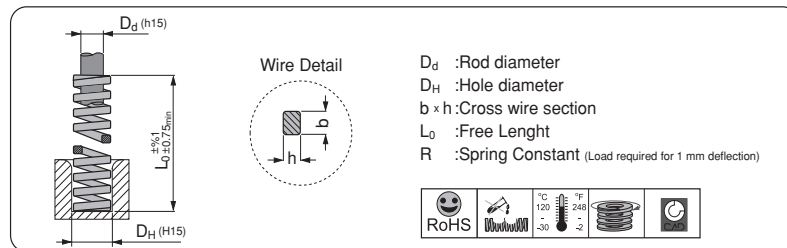

Special Springs Code	D_H	D_d	L_0	$b \times h$ mm	R \pm %10 Spring Constant N/mm	F max.		Closed Don't use! mm
						mm	N	
W16-020	16	6,3	20	4,6x5,0	1818	2,2	4000	3,0
W16-035	16	6,3	35	4,6x5,0	1000	4,0	4000	5,5
W16-050	16	6,3	50	4,6x5,0	615	6,5	4000	8,0
W16-075	16	6,3	75	4,6x5,0	400	10,0	4000	12,5
W16-100	16	6,3	100	4,6x5,0	286	14,0	4000	16,3
W19-025	19	8	25	5,1x6,5	2400	2,5	6000	3,4
W19-025	19	8	40	5,1x6,5	1333	4,5	6000	5,9
W19-050	19	8	50	5,1x6,5	1000	6,0	6000	7,8
W19-075	19	8	75	5,1x6,5	600	10,0	6000	12,4
W19-100	19	8	100	5,1x6,5	429	14,0	6000	16,5
W25-030	25	10	30	6,9x9,1	4800	2,5	12000	3,0
W25-050	25	10	50	6,9x9,1	2400	5,0	12000	5,9
W25-075	25	10	75	6,9x9,1	1500	8,0	12000	9,5
W25-100	25	10	100	6,9x9,1	1000	12,0	12000	14,7
W25-125	25	10	125	6,9x9,1	857	14,0	12000	16,9
W32-035	32	12,5	35	9,25x10,8	6667	3,0	20000	3,7
W32-050	32	12,5	50	9,25x10,8	3636	5,5	20000	6,3
W32-075	32	12,5	75	9,25x10,8	2222	9,0	20000	11,3
W32-100	32	12,5	100	9,25x10,8	1538	13,0	20000	14,9
W32-125	32	12,5	125	9,25x10,8	1250	16,0	20000	18,3
W32-150	32	12,5	150	9,25x10,8	1053	19,0	20000	21,7
W38-040	38	16	40	10,5x12,6	7143	3,5	25000	4,5
W38-050	38	16	50	10,5x12,6	5000	5,0	25000	5,9
W38-075	38	16	75	10,5x12,6	2778	9,0	25000	10,4
W38-100	38	16	100	10,5x12,6	1923	13,0	25000	15,0
W38-150	38	16	150	10,5x12,6	1316	19,0	25000	22,4
W38-200	38	16	200	10,5x12,6	926	27,0	25000	29,9