

M315-01


Shoulder Screws

Ordering-Example:
d= 6, l1= 10

Diferent Lengths On Request.
M315-01-0506010

Material: High grade alloy steel

Hardened: HRC 39 ÷ 44

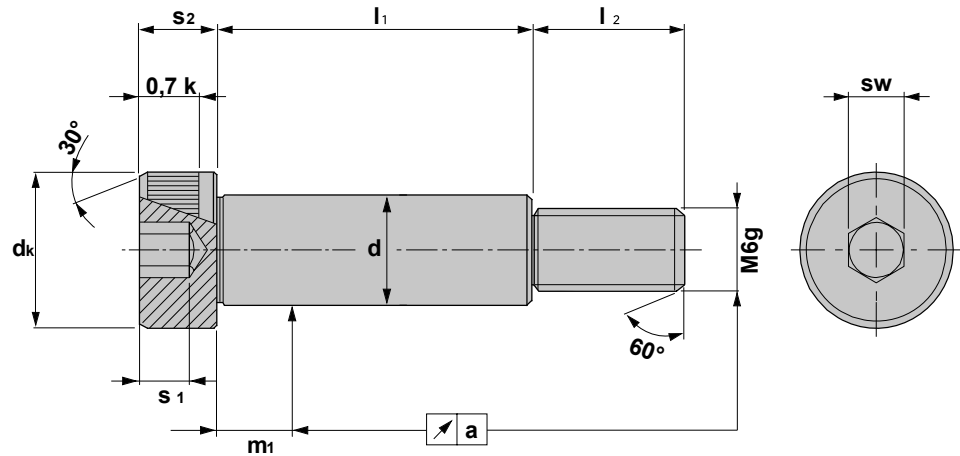

Material: High grade alloy steel
ISO 12.9
Hardened: HRC 39 ÷ 44
Tensile Strength $R_m = 1200$ N/mm²
Yield Strength $R_p = 1080$ N/mm²
Shear Strength $T_m = 720$ N/mm²
Elongation A = %8 min.
Impact Test : KCU 15J min.
m1 measuring point = "d"

d, h8	6	8	10	12	16	20	24
M	M5	M6	M8	M10	M12	M16	M20
dk/s2	10/4,5	13/5,5	16/7	18/9	24/11	30/14	36/16
L2, ±0,25	9,5	11	13	16	18	22	27
s1/sw	2,4/3	3,3/4	4,2/5	4,9/6	6,6/8	8,8/10	10/12
l1, js11							
10	•						
12	•	•					
15	•	•	•	•			
16	•	•	•	•			
20	•	•	•	•			
25	•	•	•	•			
30	•	•	•	•	•		

d, h8	6	8	10	12	16	20	24
l1, js11							
35	•	•	•	•	•		
40	•	•	•	•	•	•	
45	•	•	•	•	•	•	
50	•	•	•	•	•	•	•
55	•	•	•	•	•	•	•
60	•	•	•	•	•	•	•
65		•	•	•	•	•	•
70		•	•	•	•	•	•
80		•	•	•	•	•	•
90		•	•	•	•	•	•
100		•	•	•	•	•	•
120				•	•	•	•