

M319-02

Spacer Plates, Toothed with Adjusting Plate

Ordering-Example:


Diferent Lengths On Request.

Material: 90MnCrV8
Material: X155CrVMo12


Hardened: HRC 58 ÷ 60



- 1, 2** Material : 90MnCrV8
3 Hardened: HRC 58 ÷ 60
Screws not included.
3 Material : X155CrVMo12
4 M10x20 DIN 912

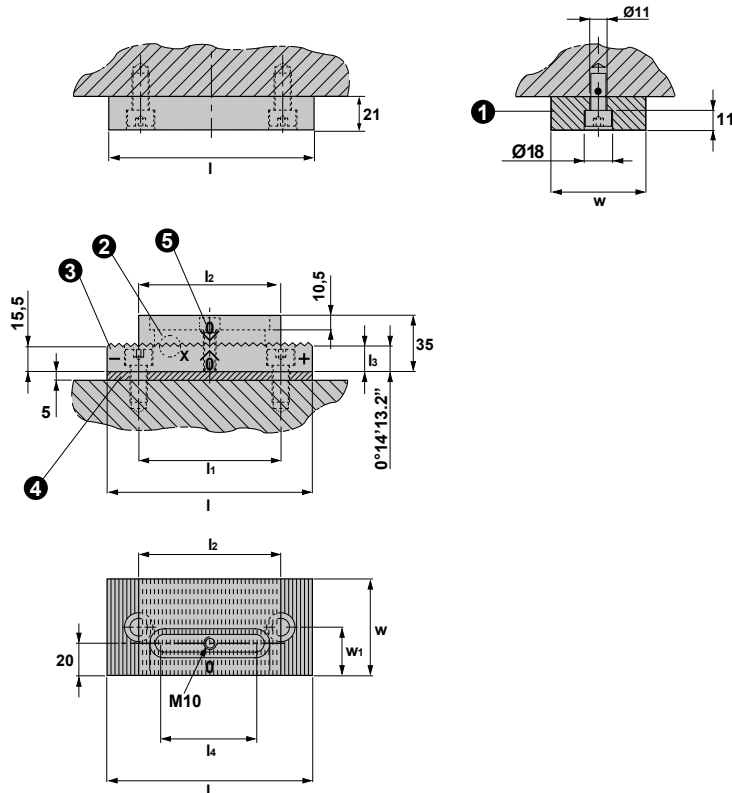

Basis : 0,02 mm per tooth



- Basic setting in the middle (grinding-in)
+ Adjustment to the right - plus
- Adjustment to the left - minus

Adjustment Range

- 12 increments each of 0,02 mm means an adjusting range of 0,24 mm with a minimum support area of 60 x 80 mm

- 14 increments each of 0,02 mm means an adjusting range of 0,28 mm with a minimum support area of 100 x 80 mm

CODE	w	l	l1	l2	l3	l4	w1	hmin.	hmax.
M319-02-060130	60	130	90	90	16,04	61	30	34,88	35,12
M319-02-080160	80	120	120	110	16,16	71	40	34,88	35,14