

S504-05


Spring Plungers

Ordering-Example:

Diferent Lengths On Request.

Material: Pin 90Mn4

Hardened: HRC 36 ÷ 40

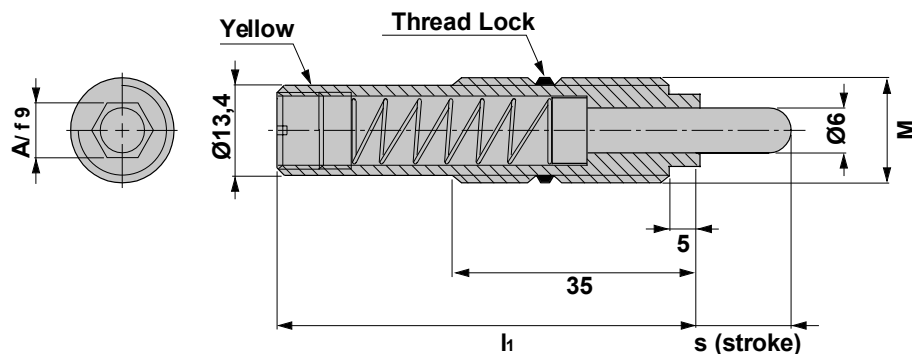

Material: Pin 90Mn4

Hardened: HRC 36 ÷ 40

Body 34CrMo4

Black oxide finish.

Colour marking yellow.

*The spring pin made from high performance plastic with additives permits lateral loading of max. 15° depending on the stroke length.

CODE	M	l1	s	Spring Rate (N /mm)	Initial Force N (Kgf)	Final Force N (Kgf)
S504-05-010060	16x1,5	60	10	0,95	3,8	13,3
S504-05-010060-002	16x2	60	10	0,95	3,8	13,3
S504-05-015060	16x1,5	60	15	2	10	40
S504-05-015060-002	16x2	60	15	2	10	40
S504-05-020080	16x1,5	80	20	1,38	6,9	34,5
S504-05-020080-002	16x2	80	20	1,38	6,9	34,5
S504-05-030080	16x1,5	80	30	1,3	6,5	45,5
S504-05-030080-002	16x2	80	30	1,3	6,5	45,5
S504-05-030120	16x1,5	120	30	0,73	18	40
S504-05-030120-002	16x2	120	30	0,73	18	40
S504-05-040150	16x1,5	150	40	0,6	13,2	37,2
S504-05-040150-002	16x2	150	40	0,6	13,2	37,2
S504-05-050150	16x1,5	150	50	0,6	13,2	43,2
S504-05-050150-002	16x2	150	50	0,6	13,2	43,2