

G225-01


Wear Plates Steel

Ordering-Example:

Diferent Lengths On Request.

Hardened: HRC 60 ÷ 64

Material: 16MnCr5

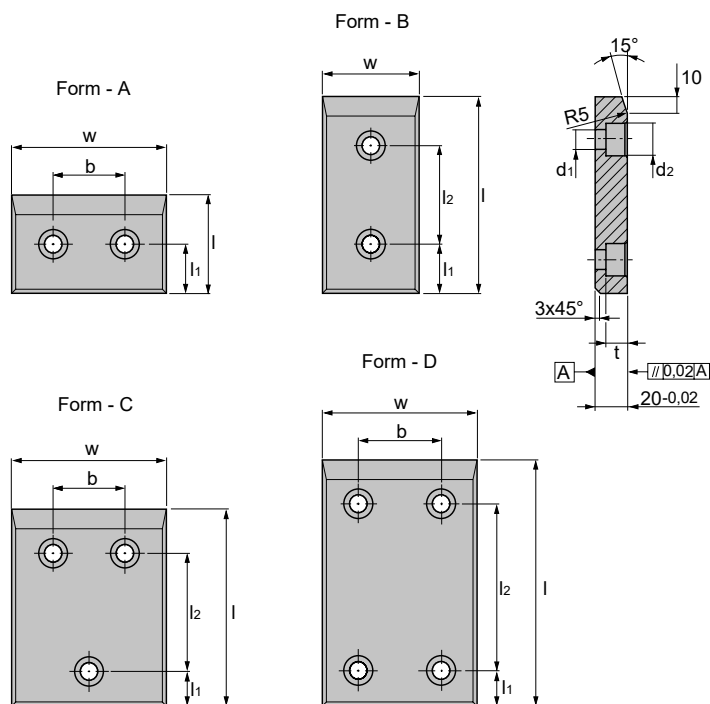

CODE	Form	w	l ±0,2	l1 ±0,2	l2 ±0,2	b ±0,2	d1 H13	d2 H13	t
G225-01-050-080	B	50	80	25	30	-	9	15	9
G225-01-050-100	B	50	100	25	50	-	13,5	20	13
G225-01-050-125	B	50	125	25	75	-	13,5	20	13
G225-01-050-160	B	50	160	25	110	-	13,5	20	13
G225-01-050-200	B	50	200	25	150	-	13,5	20	13
G225-01-080-050	A	80	50	25	-	30	9	15	9
G225-01-080-080	B	80	80	25	30	-	13,5	20	13
G225-01-080-100	B	80	100	25	50	-	13,5	20	13
G225-01-080-125	B	80	125	25	75	-	13,5	20	13
G225-01-080-160	B	80	160	25	110	-	13,5	20	13
G225-01-080-200	B	80	200	25	150	-	13,5	20	13
G225-01-080-250	B	80	250	40	170	-	13,5	20	13
G225-01-080-315	B	80	315	40	235	-	13,5	20	13
G225-01-100-050	A	100	50	25	-	50	13,5	20	13
G225-01-100-080	A	100	80	40	-	50	13,5	20	13
G225-01-100-100	B	100	100	25	50	-	13,5	20	13
G225-01-100-125	B	100	125	25	75	-	13,5	20	13
G225-01-100-160	B	100	160	25	110	-	13,5	20	13
G225-01-100-200	B	100	200	25	150	-	13,5	20	13
G225-01-100-250	B	100	250	40	170	-	13,5	20	13
G225-01-100-315	B	100	315	40	235	-	13,5	20	13

CODE	Form	w	l ±0,2	l1 ±0,2	l2 ±0,2	b ±0,2	d1 H13	d2 H13	t
G225-01-125-050	A	125	50	25	-	75	13,5	20	13
G225-01-125-080	A	125	80	40	-	75	13,5	20	13
G225-01-125-100	C	125	100	25	50	75	13,5	20	13
G225-01-125-125	C	125	125	25	75	75	13,5	20	13
G225-01-125-160	C	125	160	25	110	75	13,5	20	13
G225-01-125-200	C	125	200	25	150	75	13,5	20	13
G225-01-125-250	C	125	250	40	170	75	13,5	20	13
G225-01-125-315	C	125	315	40	235	75	13,5	20	13
G225-01-160-050	A	160	50	25	-	110	13,5	20	13
G225-01-160-080	A	160	80	40	-	110	13,5	20	13
G225-01-160-100	C	160	100	25	50	110	13,5	20	13
G225-01-160-125	C	160	125	25	75	110	13,5	20	13
G225-01-160-160	C	160	160	25	110	110	13,5	20	13
G225-01-160-200	C	160	200	25	150	110	13,5	20	13
G225-01-160-250	D	160	250	40	170	110	13,5	20	13
G225-01-160-315	D	160	315	40	235	110	13,5	20	13
G225-01-160-2501	C	160	250	40	170	110	13,5	20	13
G225-01-160-3151	C	160	315	40	235	110	13,5	20	13