

G229-05


Removable Die Heels Steel and Self-lubricating

Ordering-Example:

Diferent Lengths On Request.

Hardened: HRC 58 ÷ 60

Material: CK45 + Graphite

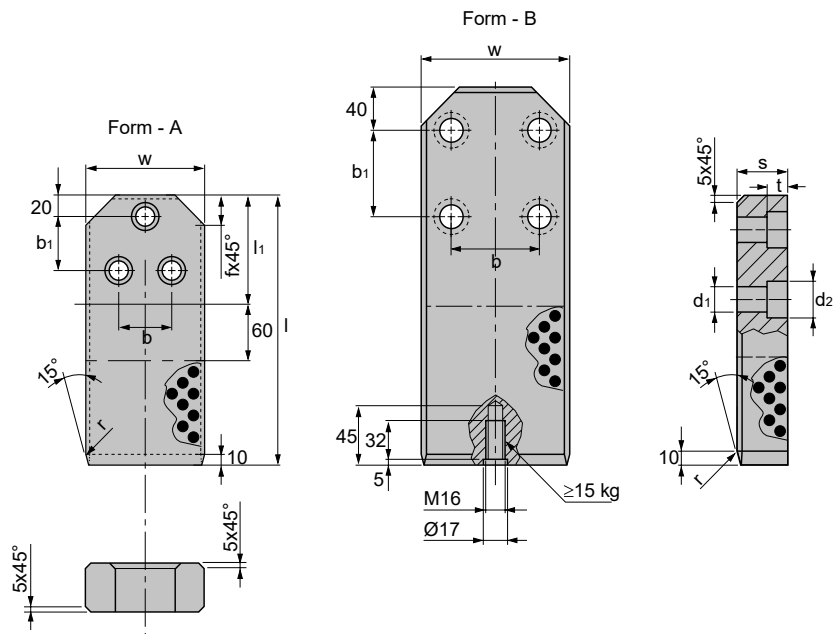

CODE	Form	w, f7	s	l	l1	b	b1	d1	d2	f	r	t
G229-05-06318036	A	63	36	180	90	36	50	14	20	18	16	16
G229-05-06320036	A	63	36	200	90	36	50	14	20	18	16	16
G229-05-06322436	A	63	36	224	90	36	50	14	20	18	16	16
G229-05-07118036	A	71	36	180	90	36	50	14	20	18	16	16
G229-05-07120036	A	71	36	200	90	36	50	14	20	18	16	16
G229-05-07122436	A	71	36	224	90	36	50	14	20	18	16	16
G229-05-09020036	A	90	36	200	100	50	50	18	26	28	25	21
G229-05-09022436	A	90	36	224	100	50	50	18	26	28	25	21
G229-05-09025036	A	90	36	250	100	50	50	18	26	28	25	21
G229-05-09020045	A	90	45	200	100	50	50	18	26	28	25	21
G229-05-09022445	A	90	45	224	100	50	50	18	26	28	25	21
G229-05-09025045	A	90	45	250	100	50	50	18	26	28	25	21
G229-05-11220045	A	112	45	200	100	50	50	18	26	28	25	21
G229-05-11222445	A	112	45	224	100	50	50	18	26	28	25	21
G229-05-11225045	A	112	45	250	100	50	50	18	26	28	25	21
G229-05-14031545	B	140	45	315	150	90	80	22	33	36	31,5	25,5
G229-05-14040045	B	140	45	400	150	90	80	22	33	36	31,5	25,5
G229-05-14031556	B	140	56	315	150	90	80	22	33	36	31,5	25,5
G229-05-14040056	B	140	56	400	150	90	80	22	33	36	31,5	25,5
G229-05-19031545	B	190	45	315	150	90	80	22	33	36	31,5	25,5
G229-05-19040045	B	190	45	400	150	90	80	22	33	36	31,5	25,5
G229-05-19031556	B	190	56	315	150	90	80	22	33	36	31,5	25,5
G229-05-19040056	B	190	56	400	150	90	80	22	33	36	31,5	25,5
G229-05-24050056	B	240	56	500	250	160	160	26	40	36	31,5	30,5
G229-05-24063056	B	240	56	630	250	160	160	26	40	36	31,5	30,5