

G245-XX



V Driver Sets with Replaceable Inserts with Positive Return

Ordering-Example:
G245-XX-0615-02-X-BC

Diferent Lengths On Request.

Hardened: HRC 60 ÷ 64
Hardened: HRC 30 ÷ 35

Material: CK45
Material: Steel

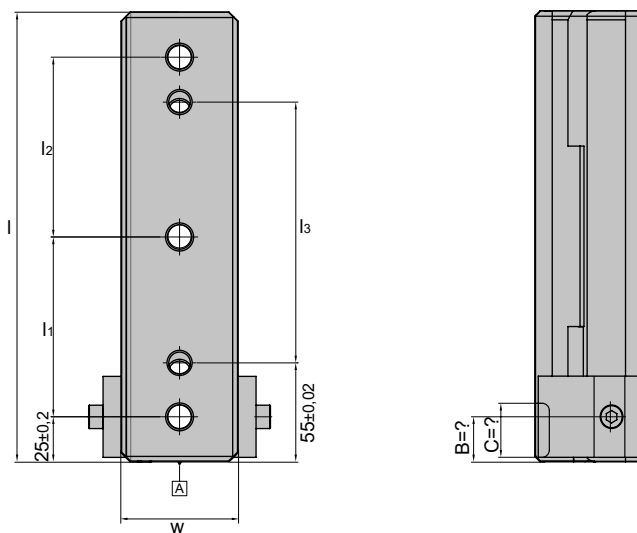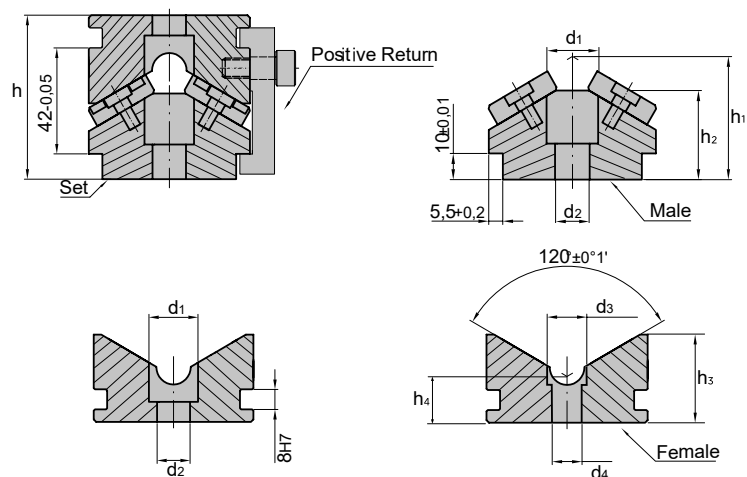

CODE	w, h6	h, ±0,05	l, -0,2	l1, ±0,12	l2, ±0,12	l3, ±0,01	h1	h2, ±0,05	h3, ±0,2	h4, ±0,01	d1, H13	d2, H13	d3, H13	d4, H7
G245-XX-0615-02-X-BC	65	65	150	-	125	45	47	34	35	18	20	13,5	16	12
G245-XX-0620-02-X-BC	65	65	200	-	175	95	47	34	35	18	20	13,5	16	12
G245-XX-0625-02-X-BC	65	65	250	100	100	145	47	34	35	18	20	13,5	16	12
G245-XX-0630-02-X-BC	65	65	300	125	125	195	47	34	35	18	20	13,5	16	12
G245-XX-1215-02-X-BC	125	85	150	-	125	45	57	44	60	28	26	17,5	20	16
G245-XX-1220-02-X-BC	125	85	200	-	175	95	57	44	60	28	26	17,5	20	16
G245-XX-1225-02-X-BC	125	85	250	100	100	145	57	44	60	28	26	17,5	20	16
G245-XX-1230-02-X-BC	125	58	300	125	125	195	57	44	60	28	26	17,5	20	16