

## C101-04

### Lifting Brackets

Ordering-Example:

Diferent Lengths On Request.


Material: C45E 700 ÷ 800 N/mm<sup>2</sup>



#### WARNING!

For safety reasons, the weight of the tool has to be supported by just two lifting pins.

Respect the max. load.

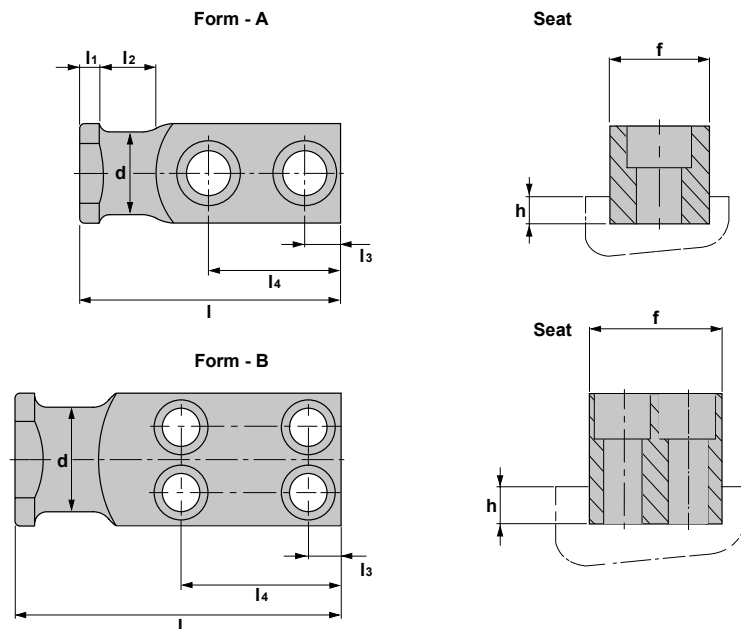

| CODE            | Max.Load (kg) | Max. Die Weight (kg) | Form | d   | l   | l1 | l2 | l3 | l4  | f +1 / +0,5 | h  | DIN EN ISO 4762 - Screw 8.8 |
|-----------------|---------------|----------------------|------|-----|-----|----|----|----|-----|-------------|----|-----------------------------|
| C101-04-020-080 | 320           | 640                  | A    | 16  | 80  | 6  | 20 | 10 | 44  | 20          | 6  | M8x30                       |
| C101-04-025-090 | 630           | 1260                 | A    | 20  | 90  | 8  | 25 | 10 | 47  | 25          | 8  | M10x35                      |
| C101-04-035-100 | 1250          | 2500                 | A    | 25  | 100 | 8  | 30 | 12 | 50  | 35          | 10 | M12x40                      |
| C101-04-040-120 | 2000          | 4000                 | A    | 32  | 120 | 10 | 32 | 16 | 62  | 40          | 10 | M16x55                      |
| C101-04-050-140 | 3200          | 6400                 | A    | 40  | 140 | 10 | 40 | 18 | 72  | 50          | 12 | M20x70                      |
| C101-04-060-160 | 5000          | 10000                | A    | 50  | 160 | 12 | 45 | 22 | 81  | 60          | 14 | M24x70                      |
| C101-04-080-200 | 8000          | 16000                | B    | 63  | 200 | 12 | 50 | 20 | 98  | 80          | 16 | M20x100                     |
| C101-04-100-250 | 12500         | 25000                | B    | 80  | 250 | 15 | 65 | 25 | 125 | 100         | 18 | M24x110                     |
| C101-04-120-300 | 20000         | 40000                | B    | 100 | 300 | 15 | 80 | 30 | 155 | 120         | 20 | M30x130                     |